



TIM-LR

ANTARIS® Programmable GPS Module with Dead Reckoning Automotive Applications

The TIM-LR is an ultra-low power sensor-based dead reckoning GPS module suitable for passive and active antennas. The combination of the ANTARIS GPS positioning engine and the Enhanced Kalman Filter EKFTM algorithm provide precise navigation in locations with no or impaired GPS reception, for example tunnels, indoor car parks and deep urban canyons. Deviations in navigation caused by multipath effects, as commonly observed in cities with densely populated high-rise buildings, belong to the past. The TIM-LR is the ideal solution for high-volume applications requiring a cost-effective and tightly integrated product that fulfills 100% road coverage requirement.



Overview

Dead reckoning GPS receivers supplement the GPS information with an incoming signal from a gyroscope (turn rate sensor) and from odometer pulses to do dead reckoning navigation through periods of GPS outages. Depending on the quality of the available GPS signals, the EKF algorithm from u-blox computes the next positions accurately by using an automatically weighted average of the GPS and sensor inputs. Dead reckoning is beneficial in following applications:

- In-Vehicle Navigation Systems (INVS) and telematics
- 24h Automatic Vehicle Location
- Car security and safety products
 - Stolen car recovery
 - Emergency and road side assistance
- GPS enabled road pricing
 - Distance-dependent billing, urban charge zones
 - Billing of metered parking areas
- Homeland security:
 - Dispatch of emergency vehicles
 - Monitoring transportation of dangerous goods
- Precise dynamic vehicle positioning
 - Agriculture, motor sport

Benefits

- High acquisition and tracking sensitivity
- Ultra-low power consumption
- Reliable navigation while satellites are out of sight
 - Left and right turns: detected by a gyroscope
 - Distanced traveled: pulses from vehicle odometer
 - Optional use of forward / reverse gear indication
 - Position output in NMEA and UBX protocols
- Excellent GPS performance
 - Excellent navigation accuracy, even at low signal levels
 - Active multipath detection and removal
 - Fast Time-To-First-Fix (TTFF)
- Highly integrated GPS module
 - Automatic pick-and-place assembly
 - Reflow solderable
- Fully EMI shielded
- Passive and active antenna support

Features

- 16 channel GPS receiver
- 8192 simultaneous time-frequency search bins
- 1 Hz position update rate
- Based on the ANTARIS GPS Technology
 - ATR0600 RF front-end IC
 - ATR0620 Baseband IC with ARM7TDMI inside
 - ATR0610 Low noise amplifier IC
- FLASH memory
- Dead Reckoning (DR) with Enhanced Kalman Filter:
 - 40 Hz DR calculation rate for high accuracy
 - Mixed GPS and DR operation, depending on availability and quality of GPS signal
 - Fully automatic calibration
 - Temperature compensation
- DGPS and SBAS (WAAS, EGNOS) support
- Operating voltage 2.7 to 3.3 V
- Battery supply pin for backup memory and RTC
- Industrial operating temperature range -40 to 85°C
- RoHS compliant (lead-free)

*your position
is our focus*



Receiver Performance Data

Receiver Type	16 channel, L1 frequency, C/A code	
Max. Update Rate	1 Hz	
Accuracy	Position	2.5 m CEP
	DGPS / SBAS	2.0 m CEP ¹
Start-up Times	Hot start	<3.5 sec
	Warm start	33 sec
	Cold start	34 sec
	Reacquisition	< 1 s
Sensitivity	Acquisition	-140 dBm
	Tracking	-149 dBm
Timing accuracy	RMS:	50 ns
	99%:	<100 ns
Dynamics	< 4 g	
Operational Limits	COCOM restrictions apply	

¹ Depends on accuracy of correction data provided by the DGPS or SBAS service

Dead Reckoning (DR) Performance Data

DR calculation rate 40 Hz²

² Internal calculation rate for high accuracy in DR calculation. Not to be confused with max. navigation update rate listed under Receiver Performance Data.

Interfaces

Physical	30 pin leadless chip carrier
Serial Ports	2 UARTs @ 3 V levels 5V TTL compatible inputs
Protocols	NMEA, UBX binary, RTCM Supports protocol mixing over same serial port
Digital Inputs	@1.8 V, configured for - Odometer pulses - Forward / Backward signal
Digital Output	TIMEPULSE @ 1.8 V
SPI Interface	@1.8V, configured for specified A/D converters to receive gyroscope and temperature information ³

³ Please refer to the TIM-LR Data Sheet for information about supported gyroscopes, A/D converters and temperature sensors


Electrical Data

Power Supply	2.7 – 3.3 V	
Power Consumption	VCC = 3.0 V:	typ. 189 mW
	VCC = 2.7 V:	typ. 170 mW
Backup Power	1.95 V – 3.6 V	
	Backup power must be provided to memorize last position and vehicle direction of the previous trip.	
Antenna Power	External or Internal VCC_RF	
Antenna Supervision	Integrated short-circuit detection and antenna shutdown, open circuit detection with little external circuit	

Environmental Data

Operating Temp.	-40°C to 85°C
Storage Temp.	-40°C to 125°C
Vibration	5 Hz to 500 Hz, 5g (IEC 68-2-6)
Shock	Half sine 30g / 11ms (DIN 40046-7)

Mechanical Data

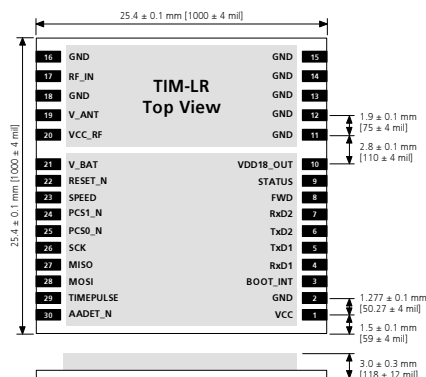

Support Product

SBE-LS	Dead Reckoning Evaluation Kit with built-in gyroscope to get familiarized with dead reckoning functionality on the ANTARIS technology
ANTARIS	Dead Reckoning Evaluation Kit

Ordering Information

TIM-LR-0-000-0	TIM-LR – Programmable GPS Module with Dead Reckoning
	Delivery Packing
	0 = Single samples
	1 = Tape on reel (100 pieces)
	5 = Tape on reel (500 pieces)

Parts of this product are patent protected.

The specifications in this document are subject to change at u-blox' discretion. u-blox assumes no responsibility for any claims or damages arising out of the use of this document, or from the use of products and services mentioned in this document, including but not limited to claims or damages based on infringement of patents, copyrights or other intellectual property rights. u-blox makes no warranties, either expressed or implied with respect to the information and specifications contained in this document. u-blox does not support any applications in connection with active weapon systems, ammunition, life support and commercial aircraft. Performance characteristics listed in this document are estimates only and do not constitute a warranty or guarantee of product performance. The copying, distribution and utilization of this document as well as the communication of its contents to others without expressed authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved, in particular the right to carry out patent, utility model and ornamental design registrations.

u-blox, the u-blox logo, the TIM type GPS module, Antaris, SuperSense, "your position is our focus", NavLox, u-center, AssisNow, FixNow and EK6 are (registered) trademarks of u-blox AG. The u-blox software as well as the design of the LEA type modules is protected by intellectual property rights in Switzerland and abroad. Further information available at info@u-blox.com.