


u-blox F9 HPS 1.21

u-blox F9 high precision sensor fusion GNSS receiver

Protocol version 33.21

Interface description



Abstract

This document describes the interface (version 33.21) of the u-blox F9 firmware HPS 1.21 platform.

Document information

Title	u-blox F9 HPS 1.21	
Subtitle	u-blox F9 high precision sensor fusion GNSS receiver	
Document type	Interface description	
Document number	UBX-21019746	
Revision and date	R02	02-Nov-2021
Disclosure restriction	C1-Public	

u-blox or third parties may hold intellectual property rights in the products, names, logos and designs included in this document. Copying, reproduction, modification or disclosure to third parties of this document or any part thereof is only permitted with the express written permission of u-blox.

The information contained herein is provided "as is" and u-blox assumes no liability for its use. No warranty, either express or implied, is given, including but not limited to, with respect to the accuracy, correctness, reliability and fitness for a particular purpose of the information. This document may be revised by u-blox at any time without notice. For the most recent documents, visit www.u-blox.com.

Copyright © 2021, u-blox AG.

Contents

1 General information.....	12
1.1 Document overview.....	12
1.2 Firmware and protocol versions.....	12
1.3 Receiver configuration.....	14
1.4 Naming.....	14
1.5 GNSS, satellite and signal identifiers.....	15
1.5.1 Overview.....	15
1.5.2 GNSS identifiers.....	15
1.5.3 Satellite identifiers.....	16
1.5.4 Signal identifiers.....	16
1.6 Message types.....	17
2 NMEA protocol.....	19
2.1 NMEA frame structure.....	19
2.2 NMEA protocol configuration.....	19
2.3 NMEA-proprietary messages.....	20
2.4 NMEA multi-GNSS operation.....	21
2.5 NMEA data fields.....	21
2.5.1 NMEA Talker ID.....	21
2.5.2 NMEA extra fields.....	21
2.5.3 NMEA latitude and longitude format.....	22
2.5.4 NMEA GNSS, satellite and signal numbering.....	22
2.5.5 NMEA position fix flags.....	22
2.5.6 NMEA output of invalid or unknown data.....	23
2.6 NMEA messages overview.....	24
2.7 Standard messages.....	24
2.7.1 DTM.....	24
2.7.1.1 Datum reference.....	24
2.7.2 GAQ.....	25
2.7.2.1 Poll a standard message (Talker ID GA).....	25
2.7.3 GBQ.....	25
2.7.3.1 Poll a standard message (Talker ID GB).....	25
2.7.4 GBS.....	26
2.7.4.1 GNSS satellite fault detection.....	26
2.7.5 GGA.....	27
2.7.5.1 Global positioning system fix data.....	27
2.7.6 GLL.....	27
2.7.6.1 Latitude and longitude, with time of position fix and status.....	28
2.7.7 GLQ.....	28
2.7.7.1 Poll a standard message (Talker ID GL).....	28
2.7.8 GNQ.....	28
2.7.8.1 Poll a standard message (Talker ID GN).....	29
2.7.9 GNS.....	29
2.7.9.1 GNSS fix data.....	29
2.7.10 GPQ.....	30
2.7.10.1 Poll a standard message (Talker ID GP).....	30

2.7.11 GQQ.....	30
2.7.11.1 Poll a standard message (Talker ID GQ).....	30
2.7.12 GRS.....	31
2.7.12.1 GNSS range residuals.....	31
2.7.13 GSA.....	31
2.7.13.1 GNSS DOP and active satellites.....	31
2.7.14 GST.....	32
2.7.14.1 GNSS pseudorange error statistics.....	32
2.7.15 GSV.....	33
2.7.15.1 GNSS satellites in view.....	33
2.7.16 RLM.....	33
2.7.16.1 Return link message (RLM).....	33
2.7.17 RMC.....	34
2.7.17.1 Recommended minimum data.....	34
2.7.18 THS.....	35
2.7.18.1 True heading and status.....	35
2.7.19 TXT.....	35
2.7.19.1 Text transmission.....	36
2.7.20 VTG.....	36
2.7.20.1 Course over ground and ground speed.....	36
2.7.21 ZDA.....	37
2.7.21.1 Time and date.....	37
2.8 PUBX messages.....	37
2.8.1 CONFIG (PUBX,41).....	37
2.8.1.1 Set protocols and baud rate.....	37
2.8.2 POSITION (PUBX,00).....	38
2.8.2.1 Poll a PUBX,00 message.....	38
2.8.3 RATE (PUBX,40).....	38
2.8.3.1 Set NMEA message output rate.....	38
2.8.4 SVSTATUS (PUBX,03).....	39
2.8.4.1 Poll a PUBX,03 message.....	39
2.8.5 TIME (PUBX,04).....	40
2.8.5.1 Poll a PUBX,04 message.....	40
3 UBX protocol.....	41
3.1 UBX protocol key features.....	41
3.2 UBX frame structure.....	41
3.3 UBX payload definition rules.....	42
3.3.1 UBX structure packing.....	42
3.3.2 UBX reserved elements.....	42
3.3.3 UBX undefined values.....	42
3.3.4 UBX conditional values.....	42
3.3.5 UBX data types.....	42
3.3.6 UBX fields scale and unit.....	43
3.3.7 UBX repeated fields.....	43
3.3.8 UBX payload decoding.....	43
3.4 UBX checksum.....	44
3.5 UBX message flow.....	44
3.5.1 UBX acknowledgement.....	44
3.5.2 UBX polling mechanism.....	44
3.6 GNSS, satellite and signal numbering.....	44

3.7 UBX message example.....	44
3.8 UBX messages overview.....	46
3.9 UBX-ACK (0x05).....	49
3.9.1 UBX-ACK-ACK (0x05 0x01).....	49
3.9.1.1 Message acknowledged.....	49
3.9.2 UBX-ACK-NAK (0x05 0x00).....	49
3.9.2.1 Message not acknowledged.....	49
3.10 UBX-CFG (0x06).....	49
3.10.1 UBX-CFG-RST (0x06 0x04).....	49
3.10.1.1 Reset receiver / Clear backup data structures.....	49
3.10.2 UBX-CFG-SPT (0x06 0x64).....	50
3.10.2.1 Configure and start a sensor production test.....	50
3.10.3 UBX-CFG-VALDEL (0x06 0x8c).....	51
3.10.3.1 Delete configuration item values.....	51
3.10.3.2 Delete configuration item values (with transaction).....	52
3.10.4 UBX-CFG-VALGET (0x06 0x8b).....	53
3.10.4.1 Get configuration items.....	53
3.10.4.2 Configuration items.....	54
3.10.5 UBX-CFG-VALSET (0x06 0x8a).....	54
3.10.5.1 Set configuration item values.....	54
3.10.5.2 Set configuration item values (with transaction).....	55
3.11 UBX-ESF (0x10).....	56
3.11.1 UBX-ESF-ALG (0x10 0x14).....	56
3.11.1.1 IMU alignment information.....	56
3.11.2 UBX-ESF-INS (0x10 0x15).....	57
3.11.2.1 Vehicle dynamics information.....	57
3.11.3 UBX-ESF-MEAS (0x10 0x02).....	58
3.11.3.1 External sensor fusion measurements.....	58
3.11.4 UBX-ESF-RAW (0x10 0x03).....	59
3.11.4.1 Raw sensor measurements.....	59
3.11.5 UBX-ESF-STATUS (0x10 0x10).....	59
3.11.5.1 External sensor fusion status.....	59
3.12 UBX-INF (0x04).....	60
3.12.1 UBX-INF-DEBUG (0x04 0x04).....	60
3.12.1.1 ASCII output with debug contents.....	61
3.12.2 UBX-INF-ERROR (0x04 0x00).....	61
3.12.2.1 ASCII output with error contents.....	61
3.12.3 UBX-INF-NOTICE (0x04 0x02).....	61
3.12.3.1 ASCII output with informational contents.....	61
3.12.4 UBX-INF-TEST (0x04 0x03).....	61
3.12.4.1 ASCII output with test contents.....	62
3.12.5 UBX-INF-WARNING (0x04 0x01).....	62
3.12.5.1 ASCII output with warning contents.....	62
3.13 UBX-MGA (0x13).....	62
3.13.1 UBX-MGA-ACK (0x13 0x60).....	62
3.13.1.1 Multiple GNSS acknowledge message.....	62
3.13.2 UBX-MGA-BDS (0x13 0x03).....	63
3.13.2.1 BeiDou ephemeris assistance.....	63
3.13.2.2 BeiDou almanac assistance.....	64
3.13.2.3 BeiDou health assistance.....	65

3.13.2.4 BeiDou UTC assistance.....	65
3.13.2.5 BeiDou ionosphere assistance.....	66
3.13.3 UBX-MGA-DBD (0x13 0x80).....	66
3.13.3.1 Poll the navigation database.....	66
3.13.3.2 Navigation database dump entry.....	67
3.13.4 UBX-MGA-GAL (0x13 0x02).....	67
3.13.4.1 Galileo ephemeris assistance.....	67
3.13.4.2 Galileo almanac assistance.....	68
3.13.4.3 Galileo GPS time offset assistance.....	69
3.13.4.4 Galileo UTC assistance.....	70
3.13.5 UBX-MGA-GLO (0x13 0x06).....	70
3.13.5.1 GLONASS ephemeris assistance.....	70
3.13.5.2 GLONASS almanac assistance.....	71
3.13.5.3 GLONASS auxiliary time offset assistance.....	72
3.13.6 UBX-MGA-GPS (0x13 0x00).....	72
3.13.6.1 GPS ephemeris assistance.....	73
3.13.6.2 GPS almanac assistance.....	74
3.13.6.3 GPS health assistance.....	74
3.13.6.4 GPS UTC assistance.....	75
3.13.6.5 GPS ionosphere assistance.....	75
3.13.7 UBX-MGA-INI (0x13 0x40).....	76
3.13.7.1 Initial position assistance.....	76
3.13.7.2 Initial position assistance.....	77
3.13.7.3 Initial time assistance.....	77
3.13.7.4 Initial time assistance.....	78
3.13.7.5 Initial clock drift assistance.....	79
3.13.7.6 Initial frequency assistance.....	79
3.13.8 UBX-MGA-QZSS (0x13 0x05).....	80
3.13.8.1 QZSS ephemeris assistance.....	80
3.13.8.2 QZSS almanac assistance.....	81
3.13.8.3 QZSS health assistance.....	81
3.14 UBX-MON (0x0a).....	82
3.14.1 UBX-MON-COMMS (0x0a 0x36).....	82
3.14.1.1 Communication port information.....	82
3.14.2 UBX-MON-GNSS (0x0a 0x28).....	83
3.14.2.1 Information message major GNSS selection.....	83
3.14.3 UBX-MON-HW (0x0a 0x09).....	84
3.14.3.1 Hardware status.....	84
3.14.4 UBX-MON-HW2 (0x0a 0x0b).....	85
3.14.4.1 Extended hardware status.....	85
3.14.5 UBX-MON-HW3 (0x0a 0x37).....	85
3.14.5.1 I/O pin status.....	85
3.14.6 UBX-MON-IO (0x0a 0x02).....	86
3.14.6.1 I/O system status.....	86
3.14.7 UBX-MON-MSGPP (0x0a 0x06).....	87
3.14.7.1 Message parse and process status.....	87
3.14.8 UBX-MON-PATCH (0x0a 0x27).....	87
3.14.8.1 Installed patches.....	87
3.14.9 UBX-MON-RF (0x0a 0x38).....	88
3.14.9.1 RF information.....	88

3.14.10	UBX-MON-RXBUF (0x0a 0x07)	89
3.14.10.1	Receiver buffer status	89
3.14.11	UBX-MON-RXR (0x0a 0x21)	89
3.14.11.1	Receiver status information	89
3.14.12	UBX-MON-SPAN (0x0a 0x31)	90
3.14.12.1	Signal characteristics	90
3.14.13	UBX-MON-SPT (0x0a 0x2f)	90
3.14.13.1	Sensor production test	90
3.14.14	UBX-MON-TXBUF (0x0a 0x08)	93
3.14.14.1	Transmitter buffer status	93
3.14.15	UBX-MON-VER (0x0a 0x04)	93
3.14.15.1	Receiver and software version	93
3.15	UBX-NAV (0x01)	94
3.15.1	UBX-NAV-ATT (0x01 0x05)	94
3.15.1.1	Attitude solution	94
3.15.2	UBX-NAV-CLOCK (0x01 0x22)	94
3.15.2.1	Clock solution	95
3.15.3	UBX-NAV-COV (0x01 0x36)	95
3.15.3.1	Covariance matrices	95
3.15.4	UBX-NAV-DOP (0x01 0x04)	96
3.15.4.1	Dilution of precision	96
3.15.5	UBX-NAV-EELL (0x01 0x3d)	96
3.15.5.1	Position error ellipse parameters	96
3.15.6	UBX-NAV-EOE (0x01 0x61)	97
3.15.6.1	End of epoch	97
3.15.7	UBX-NAV-GEOFENCE (0x01 0x39)	97
3.15.7.1	Geofencing status	97
3.15.8	UBX-NAV-HPPOSECEF (0x01 0x13)	98
3.15.8.1	High precision position solution in ECEF	98
3.15.9	UBX-NAV-HPPOSLLH (0x01 0x14)	98
3.15.9.1	High precision geodetic position solution	98
3.15.10	UBX-NAV-ORB (0x01 0x34)	99
3.15.10.1	GNSS orbit database info	99
3.15.11	UBX-NAV-POSECEF (0x01 0x01)	101
3.15.11.1	Position solution in ECEF	101
3.15.12	UBX-NAV-POSLLH (0x01 0x02)	101
3.15.12.1	Geodetic position solution	101
3.15.13	UBX-NAV-PVAT (0x01 0x17)	102
3.15.13.1	Navigation position velocity attitude time solution	102
3.15.14	UBX-NAV-PVT (0x01 0x07)	104
3.15.14.1	Navigation position velocity time solution	104
3.15.15	UBX-NAV-RELPOSNE (0x01 0x3c)	106
3.15.15.1	Relative positioning information in NED frame	106
3.15.16	UBX-NAV-SAT (0x01 0x35)	108
3.15.16.1	Satellite information	108
3.15.17	UBX-NAV-SBAS (0x01 0x32)	109
3.15.17.1	SBAS status data	109
3.15.18	UBX-NAV-SIG (0x01 0x43)	110
3.15.18.1	Signal information	111
3.15.19	UBX-NAV-SLAS (0x01 0x42)	112

3.15.19.1 QZSS L1S SLAS status data.....	112
3.15.20 UBX-NAV-STATUS (0x01 0x03).....	113
3.15.20.1 Receiver navigation status.....	113
3.15.21 UBX-NAV-TIMEBDS (0x01 0x24).....	114
3.15.21.1 BeiDou time solution.....	114
3.15.22 UBX-NAV-TIMEGAL (0x01 0x25).....	115
3.15.22.1 Galileo time solution.....	115
3.15.23 UBX-NAV-TIMEGLO (0x01 0x23).....	115
3.15.23.1 GLONASS time solution.....	116
3.15.24 UBX-NAV-TIMEGPS (0x01 0x20).....	116
3.15.24.1 GPS time solution.....	116
3.15.25 UBX-NAV-TIMEELS (0x01 0x26).....	117
3.15.25.1 Leap second event information.....	117
3.15.26 UBX-NAV-TIMEQZSS (0x01 0x27).....	118
3.15.26.1 QZSS time solution.....	118
3.15.27 UBX-NAV-TIMEUTC (0x01 0x21).....	119
3.15.27.1 UTC time solution.....	119
3.15.28 UBX-NAV-VELECEF (0x01 0x11).....	120
3.15.28.1 Velocity solution in ECEF.....	120
3.15.29 UBX-NAV-VELNED (0x01 0x12).....	120
3.15.29.1 Velocity solution in NED frame.....	120
3.16 UBX-RXM (0x02).....	121
3.16.1 UBX-RXM-COR (0x02 0x34).....	121
3.16.1.1 Differential correction input status.....	121
3.16.2 UBX-RXM-MEASX (0x02 0x14).....	122
3.16.2.1 Satellite measurements for RRLP.....	122
3.16.3 UBX-RXM-PMREQ (0x02 0x41).....	123
3.16.3.1 Power management request.....	123
3.16.3.2 Power management request.....	123
3.16.4 UBX-RXM-RAWX (0x02 0x15).....	124
3.16.4.1 Multi-GNSS raw measurements.....	124
3.16.5 UBX-RXM-RLM (0x02 0x59).....	126
3.16.5.1 Galileo SAR short-RLM report.....	126
3.16.5.2 Galileo SAR long-RLM report.....	126
3.16.6 UBX-RXM-RTCM (0x02 0x32).....	127
3.16.6.1 RTCM input status.....	127
3.16.7 UBX-RXM-SPARTN (0x02 0x33).....	127
3.16.7.1 SPARTN input status.....	127
3.17 UBX-SEC (0x27).....	128
3.17.1 UBX-SEC-SIG (0x27 0x09).....	128
3.17.1.1 Signal security information.....	128
3.17.2 UBX-SEC-UNIQID (0x27 0x03).....	128
3.17.2.1 Unique chip ID.....	129
3.18 UBX-TIM (0x0d).....	129
3.18.1 UBX-TIM-TM2 (0x0d 0x03).....	129
3.18.1.1 Time mark data.....	129
3.18.2 UBX-TIM-TP (0x0d 0x01).....	130
3.18.2.1 Time pulse time data.....	130
3.18.3 UBX-TIM-VRFY (0x0d 0x06).....	131
3.18.3.1 Sourced time verification.....	131

3.19 UBX-UPD (0x09).....	131
3.19.1 UBX-UPD-SOS (0x09 0x14).....	131
3.19.1.1 Poll backup restore status.....	132
3.19.1.2 Create backup in flash.....	132
3.19.1.3 Clear backup in flash.....	132
3.19.1.4 Backup creation acknowledge.....	132
3.19.1.5 System restored from backup.....	133
4 RTCM protocol.....	134
4.1 RTCM introduction.....	134
4.2 RTCM 3.x configuration.....	134
4.3 RTCM messages overview.....	134
4.4 RTCM 3.3 messages.....	135
4.4.1 Message type 1001.....	135
4.4.1.1 L1-only GPS RTK observables.....	135
4.4.2 Message type 1002.....	136
4.4.2.1 Extended L1-only GPS RTK observables.....	136
4.4.3 Message type 1003.....	136
4.4.3.1 L1/L2 GPS RTK observables.....	136
4.4.4 Message type 1004.....	137
4.4.4.1 Extended L1/L2 GPS RTK observables.....	137
4.4.5 Message type 1005.....	137
4.4.5.1 Stationary RTK reference station ARP.....	137
4.4.6 Message type 1006.....	138
4.4.6.1 Stationary RTK reference station ARP with antenna height.....	138
4.4.7 Message type 1007.....	138
4.4.7.1 Antenna descriptor.....	139
4.4.8 Message type 1009.....	139
4.4.8.1 L1-only GLONASS RTK observables.....	139
4.4.9 Message type 1010.....	140
4.4.9.1 Extended L1-Only GLONASS RTK observables.....	140
4.4.10 Message type 1011.....	140
4.4.10.1 L1&L2 GLONASS RTK observables.....	140
4.4.11 Message type 1012.....	141
4.4.11.1 Extended L1&L2 GLONASS RTK observables.....	141
4.4.12 Message type 1033.....	141
4.4.12.1 Receiver and antenna descriptors.....	141
4.4.13 Message type 1074.....	142
4.4.13.1 GPS MSM4.....	142
4.4.14 Message type 1075.....	142
4.4.14.1 GPS MSM5.....	142
4.4.15 Message type 1077.....	143
4.4.15.1 GPS MSM7.....	143
4.4.16 Message type 1084.....	144
4.4.16.1 GLONASS MSM4.....	144
4.4.17 Message type 1085.....	144
4.4.17.1 GLONASS MSM5.....	144
4.4.18 Message type 1087.....	145
4.4.18.1 GLONASS MSM7.....	145
4.4.19 Message type 1094.....	145
4.4.19.1 Galileo MSM4.....	145

4.4.20 Message type 1095.....	146
4.4.20.1 Galileo MSM5.....	146
4.4.21 Message type 1097.....	146
4.4.21.1 Galileo MSM7.....	147
4.4.22 Message type 1124.....	147
4.4.22.1 BeiDou MSM4.....	147
4.4.23 Message type 1125.....	148
4.4.23.1 BeiDou MSM5.....	148
4.4.24 Message type 1127.....	148
4.4.24.1 BeiDou MSM7.....	148
4.4.25 Message type 1230.....	149
4.4.25.1 GLONASS L1 and L2 code-phase biases.....	149
5 SPARTN protocol.....	150
5.1 SPARTN introduction.....	150
5.2 SPARTN configuration.....	150
5.3 SPARTN messages overview.....	150
5.4 SPARTN messages.....	150
5.4.1 Message type 0, sub-type 0.....	150
5.4.1.1 GPS orbit, clock, bias (OCB).....	150
5.4.2 Message type 0, sub-type 1.....	151
5.4.2.1 GLONASS orbit, clock, bias (OCB).....	151
5.4.3 Message type 1, sub-type 0.....	152
5.4.3.1 GPS high-precision atmosphere correction (HPAC).....	152
5.4.4 Message type 1, sub-type 1.....	153
5.4.4.1 GLONASS high-precision atmosphere correction (HPAC).....	153
5.4.5 Message type 2, sub-type 0.....	154
5.4.5.1 Geographic area definition (GAD).....	154
6 Configuration interface.....	155
6.1 Configuration database.....	155
6.2 Configuration items.....	155
6.3 Configuration layers.....	156
6.4 Configuration interface access.....	157
6.4.1 UBX protocol interface.....	157
6.5 Configuration data.....	157
6.6 Configuration transactions.....	158
6.7 Configuration reset behavior.....	159
6.8 Configuration overview.....	159
6.9 Configuration reference.....	160
6.9.1 CFG-BDS: BeiDou system configuration.....	160
6.9.2 CFG-GEOFENCE: Geofencing configuration.....	160
6.9.3 CFG-HW: Hardware configuration.....	161
6.9.4 CFG-I2C: Configuration of the I2C interface.....	162
6.9.5 CFG-I2CINPROT: Input protocol configuration of the I2C interface.....	162
6.9.6 CFG-I2COUTPROT: Output protocol configuration of the I2C interface.....	163
6.9.7 CFG-INFMSG: Information message configuration.....	163
6.9.8 CFG-ITFM: Jamming and interference monitor configuration.....	164
6.9.9 CFG-MOT: Motion detector configuration.....	164
6.9.10 CFG-MSGOUT: Message output configuration.....	164
6.9.11 CFG-NAVHPG: High precision navigation configuration.....	178

6.9.12 CFG-NAVSPG: Standard precision navigation configuration.....	178
6.9.13 CFG-NMEA: NMEA protocol configuration.....	182
6.9.14 CFG-RATE: Navigation and measurement rate configuration.....	184
6.9.15 CFG-RINV: Remote inventory.....	185
6.9.16 CFG-RTCM: RTCM protocol configuration.....	186
6.9.17 CFG-SBAS: SBAS configuration.....	186
6.9.18 CFG-SEC: Security configuration.....	188
6.9.19 CFG-SFCORE: Sensor fusion (SF) core configuration.....	188
6.9.20 CFG-SFIMU: Sensor fusion (SF) inertial measurement unit (IMU) configuration.....	188
6.9.21 CFG-SFODO: Sensor fusion (SF) odometer configuration.....	189
6.9.22 CFG-SIGNAL: Satellite systems (GNSS) signal configuration.....	190
6.9.23 CFG-SPI: Configuration of the SPI interface.....	191
6.9.24 CFG-SPIINPROT: Input protocol configuration of the SPI interface.....	191
6.9.25 CFG-SPIOUTPROT: Output protocol configuration of the SPI interface.....	191
6.9.26 CFG-TP: Timepulse configuration.....	192
6.9.27 CFG-TXREADY: TX ready configuration.....	193
6.9.28 CFG-UART1: Configuration of the UART1 interface.....	194
6.9.29 CFG-UART1INPROT: Input protocol configuration of the UART1 interface.....	195
6.9.30 CFG-UART1OUTPROT: Output protocol configuration of the UART1 interface.....	195
6.9.31 CFG-UART2: Configuration of the UART2 interface.....	195
6.9.32 CFG-UART2INPROT: Input protocol configuration of the UART2 interface.....	196
6.9.33 CFG-UART2OUTPROT: Output protocol configuration of the UART2 interface.....	196
6.9.34 CFG-USB: Configuration of the USB interface.....	196
6.9.35 CFG-USBINPROT: Input protocol configuration of the USB interface.....	197
6.9.36 CFG-USBOUTPROT: Output protocol configuration of the USB interface.....	197
6.10 Legacy UBX message fields reference.....	197
Configuration defaults.....	204
Related documents.....	222
Revision history.....	223

1 General information

1.1 Document overview

This document describes the interface of the u-blox F9 high precision sensor fusion GNSS receiver. The interface consists of the following parts:

- [NMEA protocol](#)
- [UBX protocol](#)
- [RTCM protocol](#)
- [SPARTN protocol](#)
- [Configuration interface](#)



Some of the features described here may not be available in the receiver, and some may require specific configurations to be enabled. See the data sheet for availability of the features and the integration manual for instructions for enabling them.



Previous versions of u-blox receiver documentation combined general receiver description and interface specification. In the current documentation the receiver description is included in the integration manual.


See also [Related documents](#).

1.2 Firmware and protocol versions

u-blox generation 9 receivers execute firmware from internal ROM or from internal code-RAM. If the firmware image is stored in a flash it is loaded into the code-RAM before execution. It is also possible to store the firmware image in the host system. The firmware is then loaded into the code-RAM from the host processor. (Loading the firmware from the host processor is not supported in all products.) If there is no external firmware image, then the firmware is executed from the ROM.



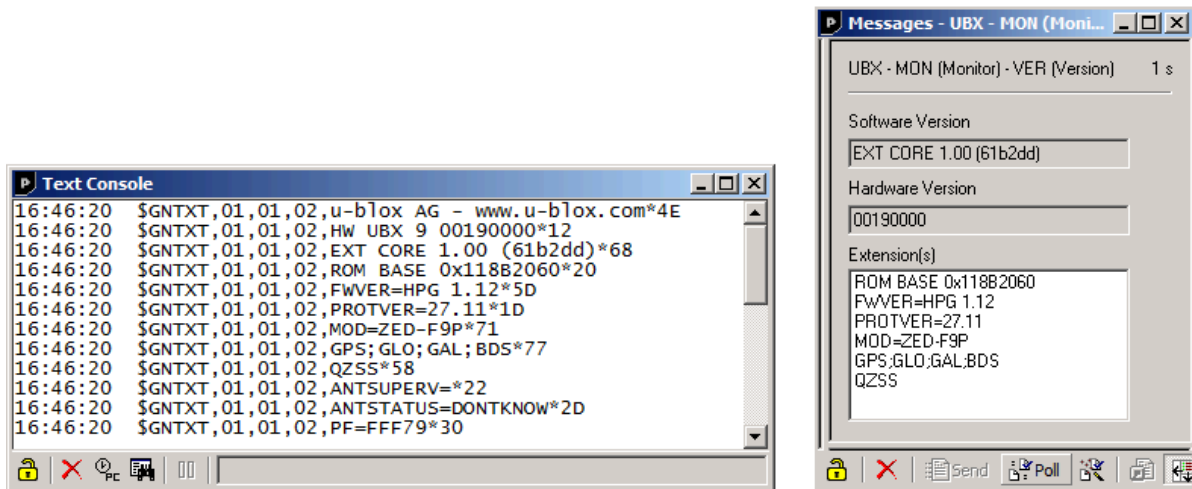

The location and the version of the boot loader and the currently running firmware can be found in the boot screen and in the [UBX-MON-VER](#) message. If the firmware has been loaded from a connected flash or from the host processor, it is indicated by text "EXT". When the receiver is started, the boot screen is output automatically in [UBX-INF-NOTICE](#) or [NMEA-Standard-TXT](#) messages if configured using [CFG-INFMSG](#). The [UBX-MON-VER](#) message can be polled using the [UBX polling mechanism](#).

The following u-center screenshots show an example of a u-blox receiver running firmware loaded from flash:



The following information is available (✓) from the boot screen (B) and the UBX-MON-VER message (M):

B	M	Example	Information
✓		u-blox AG - www.u-blox.com	Start of the boot screen.
✓		HW UBX 9 00190000	Hardware version of the u-blox receiver.
	✓	00190000	
✓	✓	EXT CORE 1.00 (61b2dd)	Base (CORE) firmware version and revision number, loaded from external memory (EXT).
		EXT LAP 1.00 (12a3bc)	Product firmware version and revision number, loaded from external memory (EXT). Available only in some firmware versions. See below for a list of product acronyms.
✓	✓	ROM BASE 0x118B2060	Revision number of the underlying boot loader firmware in ROM.
✓	✓	FWVER=HPG 1.12	Product firmware version number, where: <ul style="list-style-type: none"> • SPG = Standard precision GNSS product • HPG = High precision GNSS product • ADR = Automotive dead reckoning product • TIM = Time sync product • LAP = Lane accurate positioning product • HPS = High precision sensor fusion product • DBS = Dual band standard precision • MDR = Multi-mode dead reckoning product • PMP = L-Band Inmarsat point-to-multipoint receiver • QZS = QZSS L6 centimeter level augmentation service (CLAS) message receiver
✓	✓	PROTVER=34.00	Supported protocol version.
✓	✓	MOD=ZED-F9P	Module name (if available).
✓	✓	GPS;GLO;GAL;BDS	List of supported major GNSS (see GNSS identifiers).
✓	✓	SBAS;QZSS	List of supported augmentation systems (see GNSS identifiers).
✓		ANTSUPERV=AC SD PDoS SR	Configuration of the antenna supervisor (if available), where: <ul style="list-style-type: none"> • AC = Active antenna control enabled • SD = Short circuit detection enabled • OD = Open circuit detection enabled • PDoS = Short circuit power down logic enabled • SR = Automatic recovery from short state enabled
✓		PF=FFF79	Product configuration.

-  The "FWVER" product firmware version indicates which firmware is currently running. This is referred to as "firmware version" in this and other documents.
-  The revision numbers should only be used to identify a known firmware version. They are not necessarily numeric nor are they guaranteed to increase with newer firmware versions.
-  Similarly, firmware version numbers can have additional non-numeric information appended, such as in "5.00B03".
-  Not every entry is output by all u-blox receivers. The availability of some of the information depends on the product, the firmware location and the firmware version.

The product firmware version and the base firmware version relate to the protocol version:



Product firmware version	Base firmware version	Protocol version
HPS 1.00	EXT CORE 1.00 (500086)	33.00
HPS 1.20	EXT CORE 1.00 (a669b8)	33.20
HPS 1.21	EXT CORE 1.00 (e2b374)	33.21

1.3 Receiver configuration

u-blox positioning receivers are fully configurable with UBX protocol messages. The configuration used by the receiver during normal operation is called the "current configuration". The current configuration can be changed during normal operation by sending [UBX-CFG-VALSET](#) messages over any I/O port. The receiver will change its current configuration immediately after receiving a configuration message. The receiver will always use the current configuration only.

The current configuration is loaded from permanent configuration hard-coded in the receiver firmware (the defaults) and from non-volatile memory (user configuration) on startup of the receiver. Changes made to the current configuration at run-time will be lost when there is a power cycle, a hardware reset or a (complete) controlled software reset (see [Configuration reset behavior](#)).

See [Configuration interface](#) for a detailed description of the receiver configuration system, the explanation of the configuration concept and its principles and interfaces.

-  The configuration interface has changed from earlier u-blox positioning receivers. There is some backwards compatibility provided in UBX-CFG configuration messages. Users are strongly advised to only use the [Configuration interface](#). See also [Legacy UBX message fields reference](#).
-  See the integration manual for a basic receiver configuration most commonly used.

1.4 Naming

Message names are written in full with the parts of the name separated by hyphens ("-"). The full message name consists of the protocol name (e.g., *UBX*), the class name (e.g. *NAV*) and the message name (e.g. *PVT*). For example the receiver software version information message is referred to as *UBX-MON-VER*. Similarly, the *NMEA-Standard-GGA* is the NMEA standard message (sentence) with the global positioning fix data.

References to fields of the message add the field name separated by a dot ("."), e.g. *UBX-MON-VER.swVersion*.

Some messages use a fourth level of naming, called the message version. One example is the *UBX-MGA-GPS* message for GPS assistance data, which exists in versions for ephemerides (*UBX-MGA-GPS-EPH*) and almanacs (*UBX-MGA-GPS-ALM*).

Names of configuration items are of the form *CFG-GROUP-ITEM*. For example, *CFG-NAVSPG-DYNMODEL* refers to the navigation dynamic platform model the receiver uses. Constants add a fourth level to the item name, such as *CFG-NAVSPG-DYNMODEL-AUTOMOT* for the automotive platform model. In the context of describing an item's value, only the last part of the constant name can be used (e.g. "set *CFG-NAVSPG-DYNMODEL* to *PORT* for portable applications").

1.5 GNSS, satellite and signal identifiers

1.5.1 Overview

The [UBX protocol](#) messages use two different numbering schemes. Some messages use a one-byte (type U1) field for the satellite identifier (normally named *svId*). This uses numbering similar to the "extended" NMEA scheme and is merely an extension of the scheme in use for previous generations of u-blox receivers.

With the ever increasing numbers of GNSS satellites, this scheme has been phased out in recent u-blox positioning receivers (as numbers greater than 255 would have become necessary). Consequently, newer messages use a more sophisticated, flexible and future-proof approach. This involves having a separate *gnssId* field to identify which GNSS the satellite is part of and a simple *svId* (SV for space vehicle) field that indicates which number the satellite is in that system. In nearly all cases, this means that the *svId* is the natural number associated with the satellite. For example the GLONASS SV4 is identified as *gnssId 6*, *svId 4*, while the GPS SV4 is *gnssId 0*, *svId 4*.

Signal identifiers are used where different signals from a GNSS satellite need to be distinguished (e.g. in the [UBX-NAV-SIG](#) message). A separate *sigId* field is used. These identifiers are only valid when combined with a GNSS identifier (*gnssId* field).

The [NMEA protocol](#) (version 4.10 and later) identifies GNSS satellites with a one-digit system ID and a two-digit satellite number. u-blox receivers support this method in their NMEA output when "strict" SV numbering is selected. In most cases this is the default setting, but it can be checked or changed using the [Configuration interface](#) (see also [NMEA GNSS, satellite and signal numbering](#)).

In order to support some GNSS (e.g. BeiDou, Galileo, QZSS), which are not supported by some or all NMEA protocol versions, an "extended" SV numbering scheme can be enabled. This uses the NMEA-defined numbers where possible but adds other number ranges to support other GNSS. Note however that these non-standard extensions require 3-digit numbers, which may not be supported by some NMEA parsing software. For example, QZSS satellites use numbers in the range 193 to 202.

The NMEA standard defines signal identifiers to distinguish different signals sent by a single GNSS satellite (e.g. L2 CL and CM). u-blox positioning receivers use those identifiers for signal identification, as far as the corresponding standard is supported in a particular product.



Note that the following sections are a generic overview for different u-blox positioning receivers. A particular product may not support all of the described GNSS identifiers, satellite numbers, signal identifiers or combinations thereof.

1.5.2 GNSS identifiers

The following table lists each GNSS along with the GNSS identifiers ([UBX protocol](#)), the system IDs ([NMEA protocol](#)), and abbreviations used in this document:

¹ While not defined by NMEA 4.10, u-blox receivers in this mode will use system ID 4 for BeiDou and, if extended satellite numbering is enabled, system ID 1 for QZSS.

GNSS	Abbreviations		UBX gnssId	NMEA system ID		
				2.3 - 4.0	4.10	4.11
GPS	GPS	G	0	1	1	1
SBAS	SBAS	S	1	1	1	1
Galileo	GAL	E	2	n/a	3	3
BeiDou	BDS	B	3	n/a	(4) ¹	4
IMES	IMES	I	4	n/a	n/a	n/a
QZSS	QZSS	Q	5	n/a	(1) ¹	5
GLONASS	GLO	R	6	2	2	2
NavIC	NavIC	N	7	n/a	n/a	6

Other values will be added when support for other GNSS types will be enabled in u-blox receivers.

See also [NMEA Talker ID](#).

1.5.3 Satellite identifiers

A summary of all the satellite numbering schemes used in the [NMEA protocol](#) and the [UBX protocol](#) is provided in the following table.

GNSS	SV Range	UBX Protocol		NMEA Protocol 2.3 - 4.0		NMEA Protocol 4.10		NMEA Protocol 4.11	
		gnssId:svId	single svId	(strict)	(extended)	(strict)	(extended)	(strict)	(extended)
GPS	G1-G32	0:1-32	1-32	1-32	1-32	1-32	1-32	1-32	1-32
SBAS	S120-S158	1:120-158	120-158	33-64	33-64, 152-158	33-64	33-64, 152-158	33-64	33-64, 152-158
Galileo	E1-E36	2:1-36	211-246	-	301-336	1-36	1-36	1-36	1-36
BeiDou	B1-B5	3:1-5	159-163	-	401-405	1-5	1-5	1-5	1-5
	B6-B37	3:6-37	33-64	-	406-437	6-37	6-37	6-37	6-37
	B38-B63	3:38-63	n/a	-	438-463	38-63	38-63	38-63	38-63
IMES	I1-I10	4:1-10	173-182	n/a	173-182	n/a	173-182	n/a	173-182
QZSS	Q1-Q10	5:1-10	193-202	n/a	193-202	n/a	193-202	1-10	1-10
GLONASS	R1-R32, R?	6:1-32, 6:255	65-96, 255	65-96, null	65-96, null	65-96, null	65-96, null	65-96, null	65-96, null
NavIC	N1-N7	7:1-7	247-253	n/a	n/a	n/a	n/a	n/a	n/a

Note that GLONASS satellites can be tracked before they have been identified. In UBX messages such unknown satellites will be reported with svId 255. In NMEA messages they will be null (empty) fields. Product-related documentation and u-center will use R? to label unidentified GLONASS satellites.

1.5.4 Signal identifiers

A summary of all the signal identification schemes used in the [NMEA protocol](#) and the [UBX protocol](#) is provided in the following table. (Only a subset of the signals is supported by each product.)

² UBX messages that do not have an explicit sigId field contain information about the subset of signals marked.

³ While not defined by NMEA 4.10, u-blox receivers in this mode will use system ID 1 for QZSS.

⁴ BeiDou and QZSS signal ID are not defined in the NMEA protocol version 4.10. Values shown in the table are only valid for u-blox products and, for QZSS signal ID, if extended satellite numbering is enabled.

⁵ NMEA System ID and Signal ID are in hexadecimal format.

Signal	UBX Protocol		NMEA Protocol 4.10 ⁵		NMEA Protocol 4.11 ⁵	
	gnssId	sigId	System ID	Signal ID	System ID	Signal ID
GPS L1C/A ²	0	0	1	1	1	1
GPS L2 CL	0	3	1	6	1	6
GPS L2 CM	0	4	1	5	1	5
GPS L5 I	0	6	1	7	1	7
GPS L5 Q	0	7	1	8	1	8
SBAS L1C/A ²	1	0	1	1	1	1
Galileo E1 C ²	2	0	3	7	3	7
Galileo E1 B ²	2	1	3	7	3	7
Galileo E5 aI	2	3	3	1	3	1
Galileo E5 aQ	2	4	3	1	3	1
Galileo E5 bI	2	5	3	2	3	2
Galileo E5 bQ	2	6	3	2	3	2
BeiDou B1I D1 ²	3	0	(4) ³	(1) ⁴	4	1
BeiDou B1I D2 ²	3	1	(4) ³	(1) ⁴	4	1
BeiDou B2I D1	3	2	(4) ³	(3) ⁴	4	B
BeiDou B2I D2	3	3	(4) ³	(3) ⁴	4	B
BeiDou B1C	3	5	(4) ³	N/A	4	3
BeiDou B2a	3	7	(4) ³	N/A	4	5
QZSS L1C/A ²	5	0	(1) ³	(1) ⁴	5	1
QZSS L1S	5	1	(1) ³	(4) ⁴	5	4
QZSS L2 CM	5	4	(1) ³	(5) ⁴	5	5
QZSS L2 CL	5	5	(1) ³	(6) ⁴	5	6
QZSS L5 I	5	8	(1) ³	N/A	5	7
QZSS L5 Q	5	9	(1) ³	N/A	5	8
GLONASS L1 OF ²	6	0	2	1	2	1
GLONASS L2 OF	6	2	2	3	2	3
NavIC L5 A	7	0	N/A	N/A	6	1

1.6 Message types

The following message types are defined:

Message type	Description
Input	Messages that are input to the receiver and never output. E.g. UBX-MGA-GPS-EPH .
Output	Messages that are output by the receiver in no particular interval and never input. E.g. UBX-ACK-ACK .
Input/output	Messages that can be output by or input to the receiver. E.g. UBX-MGA-DBD-DATA0 .
Periodic	Messages that are output in regular intervals but cannot be polled. E.g. UBX-NAV-EOE .
Periodic/pollable	Messages that are output in regular intervals and can be polled. E.g. UBX-NAV-PVT .
Command	Messages that are a command to the receiver. Similar to type <i>Input</i> these are input-only. E.g. UBX-CFG-RST .
Get	Output-only configuration or command messages. E.g. UBX-CFG-DAT .

Message type	Description
Set	Input-only configuration or command messages. E.g. UBX-CFG-VALDEL .
Get/set	Input/output configuration or command messages. E.g. UBX-CFG-NAVX5 .
Polled	Non-periodic messages that can only be polled. E.g. UBX-MON-VER .
Poll request	Poll request. E.g. UBX-MGA-DBD-POLL .


2 NMEA protocol

The following sections give an overview of the NMEA messages used by u-blox positioning receivers.

By default, the NMEA messages sent by u-blox positioning receivers are based on the NMEA 0183 version 4.11 standard. For further information on the NMEA standard, refer to the *NMEA 0183 Standard for Interfacing Marine Electronic Devices*, Version 4.11, November 2018, which is available on <http://www.nmea.org/>.

2.1 NMEA frame structure

The following figure shows the structure of a NMEA protocol message (called "sentences" in the standard).

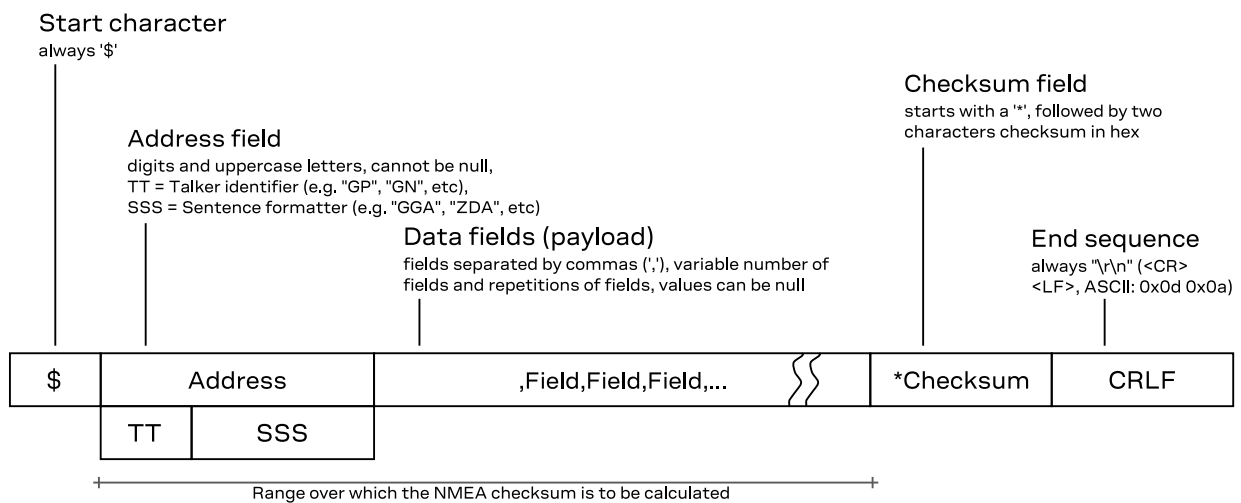

Example

\$	GP	ZDA	,141644.00,22,03,2002,00,00	*67	\r\n
----	----	-----	-----------------------------	-----	------

2.2 NMEA protocol configuration

The [NMEA protocol](#) on u-blox receivers can be configured for customer applications by using the [Configuration interface](#) (CFG-NMEA-* items).

Several NMEA standard versions are supported. Version 4.11 (not in all products), 4.10, 4.00, 2.3, or 2.1 can be configured. See [Configuration defaults](#) for the default version. See [CFG-NMEA-PROTVER](#) to configure the version. See [NMEA multi-GNSS operation](#) and [NMEA data fields](#) for details on how this affects the output.

The following filtering flags can be used to configure the output of some NMEA message fields:

Filter	Configuration Item	Description
Position filtering	CFG-NMEA-OUT_INVFIX	Enable to permit positions from failed or invalid fixes to be reported (with the "V" status flag to indicate that the data is not valid).
Valid position filtering	CFG-NMEA-OUT_MSKFIX	Enable to permit positions from invalid fixes to be reported (with the "V" status flag to indicate that the data is not valid).
Time filtering	CFG-NMEA-OUT_INVTIME	Enable to permit the receiver's best knowledge of time to be output, even though it might be wrong.

Filter	Configuration Item	Description
Date filtering	CFG-NMEA-OUT_INVDATE	Enable to permit the receiver's best knowledge of date to be output, even though it might be wrong.
GPS-only filtering	CFG-NMEA-OUT_ONLYGPS	Enable to restrict output to only report GPS satellites.
Track filtering	CFG-NMEA-OUT_FROZENCOD	Enable to permit course over ground (COG) to be reported even when it would otherwise be frozen.

The following filtering flags can be used to configure the output of some NMEA message flags:

Mode	Configuration Item	Description
Compatibility mode	CFG-NMEA-COMPAT	Some older NMEA applications expect the NMEA output to be formatted in a specific way, for example, they will only work if the latitude and longitude have exactly four digits behind the decimal point. u-blox receivers offer a compatibility mode to support these legacy applications.
Consideration mode	CFG-NMEA-CONSIDER	u-blox receivers use a sophisticated signal quality detection scheme, in order to produce the best possible position output. This algorithm considers all SV measurements, and may eventually decide to only use a subset thereof, if it improves the overall position accuracy. If consideration mode is enabled, all satellites, which were considered for navigation, are communicated as being used for the position determination. If consideration mode is disabled, only those satellites which after the consideration step remained in the position output are marked as being used.
Limit length mode	CFG-NMEA-LIMIT82	Enabling this mode will limit the NMEA sentence length to a maximum of 82 characters.
High precision mode	CFG-NMEA-HIGHPREC	Enabling this mode increases precision of the position output. Latitude and longitude then have seven digits after the decimal point, and altitude has three digits after the decimal point. Note: The high precision mode cannot be set in conjunction with either compatibility mode or Limit82 mode.

The following extended configuration options are available:

Option	Configuration Item(s)	Description
GNSS to filter	CFG-NMEA-FILT_GPS etc.	Filters satellites based on the GNSS they belong to.
Satellite numbering	CFG-NMEA-SVNUMBERING	This field configures the display of satellites that do not have an NMEA-defined value. Note: this does not apply to satellites with an unknown ID. See also Satellite identifiers .
Main Talker ID	CFG-NMEA-MAINTALKERID	By default the main Talker ID (i.e. the Talker ID used for all messages other than GSV) is determined by the GNSS assignment of the receiver's channels (see configuration items CFG-SIGNAL*). This field enables the main Talker ID to be overridden. See also NMEA Talker ID .
GSV Talker ID	CFG-NMEA-GSVTALKERID	By default the Talker ID for GSV messages is GNSS-specific (as defined by NMEA). This field enables the GSV Talker ID to be overridden.
BDS Talker ID	CFG-NMEA-BDSTALKERID	By default the Talker ID for BeiDou is "GB". This field enables the BeiDou Talker ID to be overridden.

2.3 NMEA-proprietary messages

The NMEA standard allows for proprietary, manufacturer-specific messages to be added. These shall be marked with a manufacturer mnemonic. The mnemonic assigned to u-blox is UBX and is used for all non-standard messages. These proprietary NMEA messages therefore have the address field set to PUBX. The first data field in a PUBX message identifies the message number with two digits.

2.4 NMEA multi-GNSS operation

Many applications that process NMEA messages assume that only a single GNSS is active. However, when multiple GNSS are configured, the NMEA specification requires the output to change in the following ways:

Main Talker ID The main [NMEA Talker ID](#) will be "GN" (e.g. instead of "GP" for a GPS-only receiver).

GSV Talker IDs The [GSV](#) message reports the signal strength of the visible satellites. However, the Talker ID it uses is specific to the GNSS it is reporting information for, so for a multi-GNSS receiver it will not be the same as the main Talker ID. While other messages use the "GN" Talker ID, the GSV message will use GNSS-specific Talker IDs. See also [NMEA protocol configuration](#).

Multiple GSA and GRS messages Multiple [GSA](#) and [GRS](#) messages are output for each fix, one for each GNSS. This may confuse applications that assume they are output only once per position fix (as is the case for a single GNSS receiver).

GGA Talker IDs The NMEA specification indicates that the GGA message is GPS-specific. However, u-blox receivers support the output of a GGA message for each of the Talker IDs.

BeiDou and Galileo Only NMEA version 4.10 and later have support for these systems.

QZSS Only NMEA version 4.11 and later have support for this system.

Extended satellite numbering In order to support some GNSS (e.g. BeiDou, Galileo, QZSS) that are not supported by some or all NMEA protocol versions, an "extended" SV numbering scheme can be enabled. This uses the NMEA-defined numbers where possible, but adds other number ranges to support other GNSS. Note however that these non-standard extensions require 3-digit numbers, which may not be supported by some NMEA parsing software. For example, QZSS satellites use numbers in the range 193 to 202. See [NMEA protocol configuration](#) and [Satellite identifiers](#).

2.5 NMEA data fields

Various data fields in NMEA messages depend on [NMEA protocol configuration](#) or require a definition for their interpretation.

2.5.1 NMEA Talker ID

One of the ways the NMEA standard differs depending on the GNSS is by using a two-letter message identifier, the "Talker ID". The specific Talker ID used by a u-blox receiver will depend on the product and its configuration. The table below shows the Talker ID that will be used for various GNSS configurations by default.

GNSS	Talker ID	Comments
GPS, SBAS	GP	NMEA 2.3+
GLONASS	GL	NMEA 2.3+
Galileo	GA	NMEA 4.10+
BeiDou	GB	NMEA 4.10+ (official NMEA only since 4.11)
NavIC	GI	NMEA 4.11+
QZSS	GQ	NMEA 4.11+ (GP for NMEA 2.3 - 4.10)
Any combination of GNSS	GN	

2.5.2 NMEA extra fields

The following extra fields are available in NMEA 4.10 and later.

Message	Extra fields
NMEA-Standard-GBS	systemId and signalId
NMEA-Standard-GNS	navStatus
NMEA-Standard-GRS	systemId and signalId
NMEA-Standard-GSA	systemId
NMEA-Standard-GSV	signalId
NMEA-Standard-RMC	navStatus

2.5.3 NMEA latitude and longitude format

According to the NMEA standard, latitude and longitude are output in the format *degrees, minutes and (decimal) fractions of minutes*. To convert to *degrees and fractions of degrees, or degrees, minutes, seconds and fractions of seconds*, the *minutes and fractional minutes* parts need to be converted. For example:

Format	Latitude	Longitude
Receiver output	\$GNRMC,014230.00,A,4722.80340,N,00831.68218,E,0.000,,120477,,,A,V*14	
(d)ddmm.mmmmm	4722.80340 North	00831.68218 East
Degrees and minutes	47 degrees, 22.80340 minutes	8 degrees, 31.68218 minutes
Degrees	47.38005667 degrees	8.52803633 degrees
Degrees, minutes and seconds	47 degrees, 22 minutes, 48.2040 seconds	8 degrees, 31 minutes, 40.9308 seconds

2.5.4 NMEA GNSS, satellite and signal numbering

See [GNSS, satellite and signal identifiers](#) for details on how GNSS, satellites and signals are numbered in the NMEA protocol.

NMEA defines satellite numbering systems for some, but not all GNSS. The exact behavior depends on the configured NMEA protocol version and ("extended" or "strict") mode. See [NMEA protocol configuration](#) for details.

2.5.5 NMEA position fix flags

This section shows how u-blox positioning receivers implement the NMEA protocol and the conditions determining how flags are set.

The following flags are used in NMEA 4.10 and later.

NMEA Message	GLL, RMC	GGA	GLL, VTG	RMC, GNS
Field	status ⁶	quality ⁷	posMode ⁸	posMode ⁸
No position fix (at power-up, after losing satellite lock)	V	0	N	N
GNSS fix, but user limits exceeded	V	0	N	N
Dead reckoning fix, but user limits exceeded	V	6	E	E
Dead reckoning fix	A	6	E	E
RTK float	A	5	D	F
RTK fixed	A	4	D	R

⁶ Possible *status* values: V = data invalid, A = data valid

⁷ Possible values for *quality*: 0 = No fix, 1 = autonomous GNSS fix, 2 = differential GNSS fix, 4 = RTK fixed, 5 = RTK float, 6 = estimated/dead reckoning fix

⁸ Possible values for *posMode*: N = No fix, E = estimated/dead reckoning fix, A = autonomous GNSS fix, D = differential GNSS fix, F = RTK float, R = RTK fixed

NMEA Message	GLL, RMC	GGA	GLL, VTG	RMC, GNS
Field	status ⁶	quality ⁷	posMode ⁸	posMode ⁸
2D GNSS fix	A	1 / 2	A / D	A / D
3D GNSS fix	A	1 / 2	A / D	A / D
Combined GNSS/dead reckoning fix	A	1 / 2	A / D	A / D

In high precision GNSS (HPG) products it is recommended to select NMEA version 4.10 or above. Earlier versions do not support the float RTK (F) and real time kinematic (R) mode indicator flags in all messages.

The following flags are used in NMEA 2.3 - 4.0.

NMEA Message	GLL, RMC	GGA	GSA	GLL, VTG, RMC, GNS
Field	status ⁹	quality ¹⁰	navMode ¹¹	posMode ¹²
No position fix (at power-up, after losing satellite lock)	V	0	1	N
GNSS fix, but user limits exceeded	V	0	1	N
Dead reckoning fix, but user limits exceeded	V	6	2	E
Dead reckoning fix	A	6	2	E
2D GNSS fix	A	1 / 2	2	A / D
3D GNSS fix	A	1 / 2	3	A / D
Combined GNSS/dead reckoning fix	A	1 / 2	3	A / D

The flags in NMEA 2.1 and earlier are the same as NMEA 2.3 but with the following differences:

- The *posMode* field is not output for GLL, RMC and VTG messages (each message has one field less).
- The GGA *quality* field is set to 1 (instead of 6) for both types of dead reckoning fix.

2.5.6 NMEA output of invalid or unknown data

By default the receiver will not output invalid data. In such cases, it will output empty fields. See [NMEA protocol configuration](#) for options to adjust this behavior.

A valid position fix is reported as follows:

```
$GPGLL,4717.11634,N,00833.91297,E,124923.00,A,A*6E
```

An invalid position fix (but valid time) is reported as follows:

```
$GPGLL,,,,,124924.00,V,N*42
```

If the time is unknown (e.g. during a cold start):

```
$GPGLL,,,,,,V,N*64
```



Unlike the NMEA standard behavior to invalid data, dead reckoning products always report a position. It is marked as invalid (V) when the user limits are exceeded or valid (A) if the user limits are met.

⁹ Possible values for *status*: V = data invalid, A = data valid

¹⁰ Possible values for *quality*: 0 = no fix, 1 = autonomous GNSS fix, 2 = differential GNSS fix, 4 = RTK fixed, 5 = RTK float, 6 = estimated/dead reckoning fix

¹¹ Possible values for *navMode*: 1 = No fix, 2 = 2D fix, 3 = 3D fix

¹² Possible values for *posMode*: N = No fix, E = estimated/dead reckoning fix, A = autonomous GNSS fix, D = differential GNSS fix

2.6 NMEA messages overview

Message	Class/ID	Description (Type)
NMEA-Standard – Standard NMEA messages		
NMEA-Standard-DTM	0xf0 0x0a	• Datum reference (Output)
NMEA-Standard-GAQ	0xf0 0x45	• Poll a standard message (Talker ID GA) (Poll request)
NMEA-Standard-GBQ	0xf0 0x44	• Poll a standard message (Talker ID GB) (Poll request)
NMEA-Standard-GBS	0xf0 0x09	• GNSS satellite fault detection (Output)
NMEA-Standard-GGA	0xf0 0x00	• Global positioning system fix data (Output)
NMEA-Standard-GLL	0xf0 0x01	• Latitude and longitude, with time of position fix and status (Output)
NMEA-Standard-GLQ	0xf0 0x43	• Poll a standard message (Talker ID GL) (Poll request)
NMEA-Standard-GNQ	0xf0 0x42	• Poll a standard message (Talker ID GN) (Poll request)
NMEA-Standard-GNS	0xf0 0x0d	• GNSS fix data (Output)
NMEA-Standard-GPQ	0xf0 0x40	• Poll a standard message (Talker ID GP) (Poll request)
NMEA-Standard-GQQ	0xf0 0x47	• Poll a standard message (Talker ID GQ) (Poll request)
NMEA-Standard-GRS	0xf0 0x06	• GNSS range residuals (Output)
NMEA-Standard-GSA	0xf0 0x02	• GNSS DOP and active satellites (Output)
NMEA-Standard-GST	0xf0 0x07	• GNSS pseudorange error statistics (Output)
NMEA-Standard-GSV	0xf0 0x03	• GNSS satellites in view (Output)
NMEA-Standard-RLM	0xf0 0x0b	• Return link message (RLM) (Output)
NMEA-Standard-RMC	0xf0 0x04	• Recommended minimum data (Output)
NMEA-Standard-THS	0xf0 0x0e	• True heading and status (Output)
NMEA-Standard-TXT	0xf0 0x41	• Text transmission (Output)
NMEA-Standard-VTG	0xf0 0x05	• Course over ground and ground speed (Output)
NMEA-Standard-ZDA	0xf0 0x08	• Time and date (Output)
NMEA-PUBX – u-blox proprietary NMEA messages		
NMEA-PUBX-CONFIG	0xf1 0x41	• Set protocols and baud rate (Set)
NMEA-PUBX-POSITION	0xf1 0x00	• Poll a PUBX,00 message (Poll request)
NMEA-PUBX-RATE	0xf1 0x40	• Set NMEA message output rate (Set)
NMEA-PUBX-SVSTATUS	0xf1 0x03	• Poll a PUBX,03 message (Poll request)
NMEA-PUBX-TIME	0xf1 0x04	• Poll a PUBX,04 message (Poll request)

2.7 Standard messages

Standard NMEA messages as defined by the NMEA 0183 standard. See [NMEA protocol](#) for details.

2.7.1 DTM

2.7.1.1 Datum reference

Message	NMEA-Standard-DTM	
	Datum reference	
<i>Type</i>	Output	
<i>Comment</i>	This message gives the difference between the current datum and the reference datum. The current datum is set to WGS84 by default. The reference datum cannot be changed and is always set to WGS84.	
<i>Information</i>	<i>Class/ID:</i> 0xf0 0x0a	<i>Number of fields:</i> 11
<i>Structure</i>	\$xxDTM, datum, subDatum, lat, NS, lon, EW, alt, refDatum*cs\r\n	

Examples \$GPDTM,W84,,0.0,N,0.0,E,0.0,W84*6F\r\n
 \$GPDTM,999,,0.08,N,0.07,E,-47.7,W84*1C\r\n

Payload:

Field	Name	Format	Unit	Example	Description
0	xxDTM	string	-	\$GPDTM	DTM Message ID (xx = current Talker ID, see NMEA Talker IDs table)
1	datum	string	-	W84	Local datum code: W84 = WGS84, P90 = PZ90, 999 = user-defined
2	subDatum	string	-	-	A null field (or a string describing the currently selected datum for protocol versions less than 14.00)
3	lat	numeric	min	0.08	Offset in Latitude
4	NS	character	-	S	North/South indicator
5	lon	numeric	min	0.07	Offset in Longitude
6	EW	character	-	E	East/West indicator
7	alt	numeric	m	-2.8	Offset in altitude
8	refDatum	string	-	W84	Reference datum code: W84 (WGS 84, fixed field)
9	cs	hexadecimal	-	*67	Checksum
10	CRLF	character	-	-	Carriage return and line feed

2.7.2 GAQ

2.7.2.1 Poll a standard message (Talker ID GA)

Message	NMEA-Standard-GAQ				
	Poll a standard message (Talker ID GA)				
Type	Poll request				
Comment	Polls a standard NMEA message if the current Talker ID is GA.				
Information	Class/ID: 0xf0 0x45		Number of fields: 4		
Structure	\$xxGAQ,msgId*cs\r\n				
Example	\$EIGAQ,RMC*2B\r\n				
Payload:					
Field	Name	Format	Unit	Example	Description
0	xxGAQ	string	-	\$EIGAQ	GAQ Message ID (xx = Talker ID of the device requesting the poll)
1	msgId	string	-	RMC	Message ID of the message to be polled
2	cs	hexadecimal	-	*2B	Checksum
3	CRLF	character	-	-	Carriage return and line feed

2.7.3 GBQ

2.7.3.1 Poll a standard message (Talker ID GB)

Message	NMEA-Standard-GBQ				
	Poll a standard message (Talker ID GB)				
Type	Poll request				
Comment	Polls a standard NMEA message if the current Talker ID is GB				
Information	Class/ID: 0xf0 0x44		Number of fields: 4		
Structure	\$xxGBQ,msgId*cs\r\n				

Example \$EIGBQ,RMC*28\r\n

Payload:

Field	Name	Format	Unit	Example	Description
0	xxGBQ	string	-	\$EIGBQ	GBQ Message ID (xx = Talker ID of the device requesting the poll)
1	msgId	string	-	RMC	Message ID of the message to be polled
2	cs	hexadecimal	-	*28	Checksum
3	CRLF	character	-	-	Carriage return and line feed

2.7.4 GBS

2.7.4.1 GNSS satellite fault detection

Message	NMEA-Standard-GBS GNSS satellite fault detection				
<i>Type</i>	Output				
<i>Comment</i>	<p>This message outputs the results of the Receiver Autonomous Integrity Monitoring Algorithm (RAIM).</p> <ul style="list-style-type: none"> The fields errLat, errLon and errAlt output the standard deviation of the position calculation, using all satellites that pass the RAIM test successfully. The fields errLat, errLon and errAlt are only output if the RAIM process passed successfully (i.e. no or successful edits happened). These fields are never output if 4 or fewer satellites are used for the navigation calculation (because, in such cases, integrity cannot be determined by the receiver autonomously). The fields prob, bias and stdev are only output if at least one satellite failed in the RAIM test. <p>If more than one satellites fail the RAIM test, only the information for the worst satellite is output in this message.</p>				
<i>Information</i>	Class/ID: 0xf0 0x09		Number of fields: 13		
<i>Structure</i>	\$xxGBS,time,errLat,errLon,errAlt,svid,prob,bias,stdev,systemId,signalId*cs\r\n				
<i>Examples</i>	\$GPGBS,235503.00,1.6,1.4,3.2,,,,,*40\r\n \$GPGBS,235458.00,1.4,1.3,3.1,03,, -21.4,3.8,1,0*5B\r\n				
<i>Payload:</i>					
Field	Name	Format	Unit	Example	Description
0	xxGBS	string	-	\$GPGBS	GBS Message ID (xx = current Talker ID, see NMEA Talker IDs table)
1	time	hhmmss.ss	-	235503.00	UTC time to which this RAIM sentence belongs. See section UTC representation in the integration manual for details.
2	errLat	numeric	m	1.6	Expected error in latitude
3	errLon	numeric	m	1.4	Expected error in longitude
4	errAlt	numeric	m	3.2	Expected error in altitude
5	svid	numeric	-	03	Satellite ID of most likely failed satellite
6	prob	numeric	-	-	Probability of missed detection: null (not supported, fixed field)
7	bias	numeric	m	-21.4	Estimated bias of most likely failed satellite (a priori residual)
8	stdev	numeric	m	3.8	Standard deviation of estimated bias
9	systemId	hexadecimal	-	1	NMEA-defined GNSS system ID, see Signal Identifiers table (only available in NMEA 4.10 and later)
10	signalId	hexadecimal	-	-	NMEA-defined GNSS signal ID, see Signal Identifiers table (only available in NMEA 4.10 and later)

11	cs	hexadecimal	-	*5B	Checksum
12	CRLF	character	-	-	Carriage return and line feed


2.7.5 GGA

2.7.5.1 Global positioning system fix data

Message	NMEA-Standard-GGA Global positioning system fix data				
Type	Output				
Comment	Time and position, together with GPS fixing-related data (number of satellites in use, and the resulting HDOP, age of differential data if in use, etc.). ⓘ The output of this message is dependent on the currently selected datum (default: WGS84). The NMEA specification indicates that the GGA message is GPS-specific. However, when the receiver is configured for multi-GNSS, the GGA message contents will be generated from the multi-GNSS solution. For multi-GNSS use, it is recommended that the NMEA-GNS message is used instead.				
Information	Class/ID: 0xF0 0x00		Number of fields: 17		
Structure	\$xxGGA,time,lat,NS,lon,EW,quality,numSV,HDOP,alt,altUnit,sep,sepUnit,diffAge,diffStation*cs\r\n				
Example	\$GPGGA,092725.00,4717.11399,N,00833.91590,E,1,08,1.01,499.6,M,48.0,M,,*5B\r\n				
Payload:					
Field	Name	Format	Unit	Example	Description
0	xxGGA	string	-	\$GPGGA	GGA Message ID (xx = current Talker ID, see NMEA Talker IDs table)
1	time	hhmmss.ss	-	092725.00	UTC time. See section UTC representation in the integration manual for details.
2	lat	ddmm.mmmmm	-	4717.11399	Latitude (degrees and minutes), see format description
3	NS	character	-	N	North/South indicator
4	lon	dddmm.mmmmm	-	00833.91590	Longitude (degrees and minutes), see format description
5	EW	character	-	E	East/West indicator
6	quality	digit	-	1	Quality indicator for position fix, see position fix flags description
7	numSV	numeric	-	08	Number of satellites used (range: 0-12)
8	HDOP	numeric	-	1.01	Horizontal Dilution of Precision
9	alt	numeric	m	499.6	Altitude above mean sea level
10	altUnit	character	-	M	Altitude units: M (meters, fixed field)
11	sep	numeric	m	48.0	Geoid separation: difference between ellipsoid and mean sea level
12	sepUnit	character	-	M	Geoid separation units: M (meters, fixed field)
13	diffAge	numeric	s	-	Age of differential corrections (null when DGPS is not used)
14	diffStation	numeric	-	-	ID of station providing differential corrections (null when DGPS is not used)
15	cs	hexadecimal	-	*5B	Checksum
16	CRLF	character	-	-	Carriage return and line feed

2.7.6 GLL

2.7.6.1 Latitude and longitude, with time of position fix and status

Message	NMEA-Standard-GLL Latitude and longitude, with time of position fix and status				
Type	Output				
Comment	 The output of this message is dependent on the currently selected datum (default: WGS84)				
Information	Class/ID: 0xf0 0x01		Number of fields: 10		
Structure	\$xxGLL, lat, NS, lon, EW, time, status, posMode*cs\r\n				
Example	\$GPGLL, 4717.11364, N, 00833.91565, E, 092321.00, A, A*60\r\n				
Payload:					
Field	Name	Format	Unit	Example	Description
0	xxGLL	string	-	\$GPGLL	GLL Message ID (xx = current Talker ID, see NMEA Talker IDs table)
1	lat	ddmm. mmmm	-	4717.11364	Latitude (degrees and minutes), see format description
2	NS	character	-	N	North/South indicator
3	lon	dddmm. mmmm	-	00833.91565	Longitude (degrees and minutes), see format description
4	EW	character	-	E	East/West indicator
5	time	hhmmss.ss	-	092321.00	UTC time. See section UTC representation in the integration manual for details.
6	status	character	-	A	Data validity status, see position fix flags description
7	posMode	character	-	A	Positioning mode, see position fix flags description (only available in NMEA 2.3 and later)
8	cs	hexadecimal	-	*60	Checksum
9	CRLF	character	-	-	Carriage return and line feed

2.7.7 GLQ

2.7.7.1 Poll a standard message (Talker ID GL)

Message	NMEA-Standard-GLQ Poll a standard message (Talker ID GL)				
Type	Poll request				
Comment	Polls a standard NMEA message if the current Talker ID is GL				
Information	Class/ID: 0xf0 0x43		Number of fields: 4		
Structure	\$xxGLQ, msgId*cs\r\n				
Example	\$EIGLQ, RMC*3A\r\n				
Payload:					
Field	Name	Format	Unit	Example	Description
0	xxGLQ	string	-	\$EIGLQ	GLQ Message ID (xx = Talker ID of the device requesting the poll)
1	msgId	string	-	RMC	Message ID of the message to be polled
2	cs	hexadecimal	-	*3A	Checksum
3	CRLF	character	-	-	Carriage return and line feed

2.7.8 GNQ

2.7.8.1 Poll a standard message (Talker ID GN)

Message		NMEA-Standard-GNQ			
		Poll a standard message (Talker ID GN)			
Type	Poll request				
Comment	Polls a standard NMEA message if the current Talker ID is GN				
Information	Class/ID: 0xF0 0x42	Number of fields: 4			
Structure	\$xxGNQ,msgId*cs\r\n				
Example	\$EIGNQ,RMC*3A\r\n				
Payload:					
Field	Name	Format	Unit	Example	Description
0	xxGNQ	string	-	\$EIGNQ	GNQ Message ID (xx = Talker ID of the device requesting the poll)
1	msgId	string	-	RMC	Message ID of the message to be polled
2	cs	hexadecimal	-	*3A	Checksum
3	CRLF	character	-	-	Carriage return and line feed

2.7.9 GNS

2.7.9.1 GNSS fix data

Message		NMEA-Standard-GNS			
		GNSS fix data			
Type	Output				
Comment	Time and position, together with GNSS fixing-related data (number of satellites in use, and the resulting HDOP, age of differential data if in use, etc.). ⓘ The output of this message is dependent on the currently selected datum (default: WGS84)				
Information	Class/ID: 0xF0 0x0d	Number of fields: 16			
Structure	\$xxGNS,time,lat,NS,lon,EW,posMode,numSV,HDOP,alt,sep,diffAge,diffStation,navStatus*cs\r\n				
Examples	\$GNGNS,103600.01,5114.51176,N,00012.29380,W,ANNN,07,1.18,111.5,45.6,,,V*00\r\n \$GNGNS,122310.2,3722.425671,N,12258.856215,W,DAAA,14,0.9,1005.543,6.5,,,V*0E\r\n \$GPGNS,122310.2,,,,,07,,,,5.2,23,V*02\r\n				
Payload:					
Field	Name	Format	Unit	Example	Description
0	xxGNS	string	-	\$GPGNS	GNS Message ID (xx = current Talker ID, see NMEA Talker IDs table)
1	time	hhmmss.ss	-	091547.00	UTC time. See section UTC representation in the integration manual for details.
2	lat	ddmm. mmmm	-	5114.50897	Latitude (degrees and minutes), see format description
3	NS	character	-	N	North/South indicator
4	lon	dddmm. mmmm	-	00012.28663	Longitude (degrees and minutes), see format description
5	EW	character	-	E	East/West indicator
6	posMode	character	-	AAAA	Positioning mode, see position fix flags description . First character for GPS, second character for GLONASS, third character for Galileo, fourth character for BeiDou
7	numSV	numeric	-	10	Number of satellites used (range: 0-99)
8	HDOP	numeric	-	0.83	Horizontal Dilution of Precision

9	alt	numeric	m	111.1	Altitude above mean sea level
10	sep	numeric	m	45.6	Geoid separation: difference between ellipsoid and mean sea level
11	diffAge	numeric	s	-	Age of differential corrections (null when DGPS is not used)
12	diffStation	numeric	-	-	ID of station providing differential corrections (null when DGPS is not used)
13	navStatus	character	-	V	Navigational status indicator: V (Equipment is not providing navigational status information, fixed field, only available in NMEA 4.10 and later)
14	cs	hexadecimal	-	*71	Checksum
15	CRLF	character	-	-	Carriage return and line feed

2.7.10 GPQ

2.7.10.1 Poll a standard message (Talker ID GP)

Message	NMEA-Standard-GPQ Poll a standard message (Talker ID GP)				
Type	Poll request				
Comment	Polls a standard NMEA message if the current Talker ID is GP				
Information	Class/ID: 0xf0 0x40		Number of fields: 4		
Structure	\$xxGPQ,msgId*cs\r\n				
Example	\$EIGPQ,RMC*3A\r\n				
Payload:					
Field	Name	Format	Unit	Example	Description
0	xxGPQ	string	-	\$EIGPQ	GPQ Message ID (xx = Talker ID of the device requesting the poll)
1	msgId	string	-	RMC	Message ID of the message to be polled
2	cs	hexadecimal	-	*3A	Checksum
3	CRLF	character	-	-	Carriage return and line feed

2.7.11 GQQ

2.7.11.1 Poll a standard message (Talker ID GQ)

Message	NMEA-Standard-GQQ Poll a standard message (Talker ID GQ)				
Type	Poll request				
Comment	Polls a standard NMEA message if the current Talker ID is GQ				
Information	Class/ID: 0xf0 0x47		Number of fields: 4		
Structure	\$xxGQQ,msgId*cs\r\n				
Example	\$EIGQQ,RMC*3A\r\n				
Payload:					
Field	Name	Format	Unit	Example	Description
0	xxGQQ	string	-	\$EIGQQ	GQQ Message ID (xx = Talker ID of the device requesting the poll)
1	msgId	string	-	RMC	Message ID of the message to be polled

2	cs	hexadecimal -	*3A	Checksum
3	CRLF	character -	-	Carriage return and line feed

2.7.12 GRS

2.7.12.1 GNSS range residuals

Message	NMEA-Standard-GRS GNSS range residuals				
Type	Output				
Comment	If less than 12 SVs are available, the remaining fields are output empty. If more than 12 SVs are used, only the residuals of the first 12 SVs are output, in order to remain consistent with the NMEA standard. In a multi-GNSS system this message will be output multiple times, once for each GNSS. ⓘ This message relates to associated GGA and GSA messages.				
Information	Class/ID: 0xf0 0x06	Number of fields: 19			
Structure	\$xxGRS,time,mode{,residual},systemId,signalId*cs\r\n				
Examples	\$GNGRS,104148.00,1,2.6,2.2,-1.6,-1.1,-1.7,-1.5,5.8,1.7,,,,,1,1*52\r\n \$GNGRS,104148.00,1,,0.0,2.5,0.0,,2.8,,,,,,1,5*52\r\n				
Payload:					
Field	Name	Format	Unit	Example	Description
0	xxGRS	string	-	\$GPGRS	GRS Message ID (xx = current Talker ID, see NMEA Talker IDs table)
1	time	hhmmss.ss	-	082632.00	UTC time of associated position fix. See section UTC representation in the integration manual for details.
2	mode	digit	-	1	Computation method used: <ul style="list-style-type: none"> 1 = Residuals were recomputed after the GGA position was computed (fixed)
<i>Start of repeated group (12 times)</i>					
3 + n	residual	numeric	m	0.54	Range residuals for SVs used in navigation. The SV order matches the order from the GSA sentence
<i>End of repeated group (12 times)</i>					
15	systemId	hexadecimal -	-	1	NMEA-defined GNSS system ID, see Signal Identifiers table (only available in NMEA 4.10 and later)
16	signalId	hexadecimal -	-	-	NMEA-defined GNSS signal ID, see Signal Identifiers table (only available in NMEA 4.10 and later)
17	cs	hexadecimal -	-	*70	Checksum
18	CRLF	character -	-	-	Carriage return and line feed

2.7.13 GSA

2.7.13.1 GNSS DOP and active satellites

Message	NMEA-Standard-GSA GNSS DOP and active satellites			
Type	Output			
Comment	The GNSS receiver operating mode, satellites used for navigation, and DOP values. <ul style="list-style-type: none"> If less than 12 SVs are used for navigation, the remaining fields are left empty. If more than 12 SVs are used for navigation, only the IDs of the first 12 are output. The SV numbers (fields 'svid') are in the range of 1 to 32 for GPS satellites, and 33 to 64 for SBAS satellites (33 = SBAS PRN 120, 34 = SBAS PRN 121, and so on) In a multi-GNSS system this message will be output multiple times, once for each GNSS.			

Information	<i>Class/ID: 0xf0 0x02</i>	<i>Number of fields: 21</i>			
Structure	\$xxGSA, opMode, navMode{, svid}, PDOP, HDOP, VDOP, systemId*cs\r\n				
Example	\$GPGSA,A,3,23,29,07,08,09,18,26,28,,,,,1.94,1.18,1.54,1*0D\r\n				
Payload:					
Field	Name	Format	Unit	Example	Description
0	xxGSA	string	-	\$GPGSA	GSA Message ID (xx = current Talker ID, see NMEA Talker IDs table)
1	opMode	character	-	A	Operation mode: <ul style="list-style-type: none"> M = Manually set to operate in 2D or 3D mode A = Automatically switching between 2D or 3D mode
2	navMode	digit	-	3	Navigation mode, see position fix flags description
<i>Start of repeated group (12 times)</i>					
3 + n	svid	numeric	-	29	Satellite number
<i>End of repeated group (12 times)</i>					
15	PDOP	numeric	-	1.94	Position dilution of precision
16	HDOP	numeric	-	1.18	Horizontal dilution of precision
17	VDOP	numeric	-	1.54	Vertical dilution of precision
18	systemId	hexadecimal	-	1	NMEA-defined GNSS system ID, see Signal Identifiers table (only available in NMEA 4.10 and later)
19	cs	hexadecimal	-	*0D	Checksum
20	CRLF	character	-	-	Carriage return and line feed

2.7.14 GST

2.7.14.1 GNSS pseudorange error statistics

Message	NMEA-Standard-GST GNSS pseudorange error statistics				
Type	Output				
Comment	This message reports statistical information on the quality of the position solution.				
Information	<i>Class/ID: 0xf0 0x07</i>	<i>Number of fields: 11</i>			
Structure	\$xxGST, time, rangeRms, stdMajor, stdMinor, orient, stdLat, stdLong, stdAlt*cs\r\n				
Example	\$GPGST,082356.00,1.8,,,,,1.7,1.3,2.2*7E\r\n				
Payload:					
Field	Name	Format	Unit	Example	Description
0	xxGST	string	-	\$GPGST	GST Message ID (xx = current Talker ID, see NMEA Talker IDs table)
1	time	hhmmss.ss	-	082356.00	UTC time of associated position fix. See section UTC representation in the integration manual for details.
2	rangeRms	numeric	m	1.8	RMS value of the standard deviation of the ranges
3	stdMajor	numeric	m	-	Standard deviation of semi-major axis
4	stdMinor	numeric	m	-	Standard deviation of semi-minor axis
5	orient	numeric	deg	-	Orientation of semi-major axis
6	stdLat	numeric	m	1.7	Standard deviation of latitude error
7	stdLong	numeric	m	1.3	Standard deviation of longitude error
8	stdAlt	numeric	m	2.2	Standard deviation of altitude error

9	cs	hexadecimal -	*7E	Checksum
10	CRLF	character -	-	Carriage return and line feed

2.7.15 GSV

2.7.15.1 GNSS satellites in view

Message	NMEA-Standard-GSV GNSS satellites in view				
Type	Output				
Comment	The number of satellites in view, together with each SV ID, elevation azimuth, and signal strength (C/No) value. Only four satellite details are transmitted in one message. In a multi-GNSS system sets of GSV messages will be output multiple times, one set for each GNSS.				
Information	Class/ID: 0xf0 0x03	Number of fields: 7 + [1..4]·4			
Structure	\$xxGSV, numMsg, msgNum, numSV{, svid, elv, az, cno}, signalId*cs\r\n				
Examples	<pre>\$GPGSV, 3, 1, 09, 09, , , 17, 10, , , 40, 12, , , 49, 13, , , 35, 1*6F\r\n \$GPGSV, 3, 2, 09, 15, , , 44, 17, , , 45, 19, , , 44, 24, , , 50, 1*64\r\n \$GPGSV, 3, 3, 09, 25, , , 40, 1*6E\r\n \$GPGSV, 1, 1, 03, 12, , , 42, 24, , , 47, 32, , , 37, 5*66\r\n \$GAGSV, 1, 1, 00, 2*76\r\n</pre>				
Payload:					
Field	Name	Format	Unit	Example	Description
0	xxGSV	string	-	\$GPGSV	GSV Message ID (xx = GSV Talker ID, see NMEA Talker IDs table). Talker ID GN shall not be used.
1	numMsg	digit	-	3	Number of messages, total number of GSV messages being output (range: 1-9)
2	msgNum	digit	-	1	Number of this message (range: 1-numMsg)
3	numSV	numeric	-	10	Number of known satellites in view regarding both the talker ID and the signalId
Start of repeated group (1..4 times)					
4 + n·4	svid	numeric	-	23	Satellite ID
5 + n·4	elv	numeric	deg	38	Elevation (<= 90)
6 + n·4	az	numeric	deg	230	Azimuth (range: 0-359)
7 + n·4	cno	numeric	dBHz	44	Signal strength (C/NO, range: 0-99), null when not tracking
End of repeated group (1..4 times)					
4 + N·4	signalId	hexadecimal -	-	-	NMEA-defined GNSS signal ID, see Signal Identifiers table (only available in NMEA 4.10 and later)
5 + N·4	cs	hexadecimal -	-	*7F	Checksum
6 + N·4	CRLF	character -	-	-	Carriage return and line feed

2.7.16 RLM

2.7.16.1 Return link message (RLM)

Message	NMEA-Standard-RLM Return link message (RLM)			
Type	Output			
Comment	The RLM sentence is used to transfer a Return link message from a Cospas-Sarsat recognized Return link service provider (RLSP).			

The RLM sentence supports communications to an emitting beacon once a distress alert has been detected, located and confirmed. The communications may include acknowledgement of the alert to the emitting beacon as well as optional text messages, and may also include remote beacon configuration and testing.

Information	Class/ID: 0xf0 0x0b		Number of fields: 7		
Structure	\$xxRLM, beacon, time, code, body*cs\r\n				
Examples	\$GARLM, 00000078A9FBAD5, 083559.00, 3, C45B*57\r\n \$GARLM, F7129D41BC6A78C, 034433.02, 3, B63CA732AFD419D2*57\r\n				
Payload:					
Field	Name	Format	Unit	Example	Description
0	xxRLM	string	-	\$GARLM	RLM message ID (xx = current Talker ID, see NMEA Talker IDs table)
1	beacon	hexadecimal	-	00000078A9FBAD5	Beacon ID, identifies beacon intended to receive this message (fixed length 15 hexadecimal character field)
2	time	hhmmss.ss	-	083559.00	Time of reception field to indicate RLM timestamp in UTC. See section UTC representation in the integration manual for details.
3	code	character	-	3	Message code field to identify type of RLM Message Service: <ul style="list-style-type: none"> • 0 = Reserved for future RLM services • 1 = Acknowledgement service RLM • 2 = Command service RLM • 3 = Message service RLM • 4-E = Reserved for future RLM services • F = Test service RLM (currently used only by the Galileo program)
4	body	hexadecimal	-	C45B	Message body encapsulates the data parameters provided by the RLSP into hexadecimal format.
5	cs	hexadecimal	-	*57	Checksum
6	CRLF	character	-	-	Carriage return and line feed

2.7.17 RMC

2.7.17.1 Recommended minimum data

Message	NMEA-Standard-RMC Recommended minimum data				
Type	Output				
Comment	The recommended minimum sentence defined by NMEA for GNSS system data. The output of this message is dependent on the currently selected datum (default: WGS84)				
Information	Class/ID: 0xf0 0x04		Number of fields: 16		
Structure	\$xxRMC, time, status, lat, NS, lon, EW, spd, cog, date, mv, mvEW, posMode, navStatus*cs\r\n				
Example	\$GPRMC, 083559.00, A, 4717.11437, N, 00833.91522, E, 0.004, 77.52, 091202, , , A, V*57\r\n				
Payload:					
Field	Name	Format	Unit	Example	Description
0	xxRMC	string	-	\$GPRMC	RMC Message ID (xx = current Talker ID, see NMEA Talker IDs table)
1	time	hhmmss.ss	-	083559.00	UTC time. See section UTC representation in the integration manual for details.
2	status	character	-	A	Data validity status, see position fix flags description
3	lat	ddmm. mmmm	-	4717.11437	Latitude (degrees and minutes), see format description

4	NS	character	-	N	North/South indicator
5	lon	dddmm. mmmm	-	00833.91522	Longitude (degrees and minutes), see format description
6	EW	character	-	E	East/West indicator
7	spd	numeric	knots	0.004	Speed over ground
8	cog	numeric	deg	77.52	Course over ground
9	date	ddmmy	-	091202	Date in day, month, year format. See section UTC representation in the integration manual for details.
10	mv	numeric	deg	-	Magnetic variation value
11	mvEW	character	-	-	Magnetic variation E/W indicator
12	posMode	character	-	A	Mode Indicator, see position fix flags description (only available in NMEA 2.3 and later)
13	navStatus	character	-	V	Navigational status indicator: V (Equipment is not providing navigational status information, fixed field, only available in NMEA 4.10 and later)
14	cs	hexadecimal	-	*57	Checksum
15	CRLF	character	-	-	Carriage return and line feed

2.7.18 THS

2.7.18.1 True heading and status

Message	NMEA-Standard-THS True heading and status				
Type	Output				
Comment	Actual vehicle heading in degrees produced by any device or system producing true heading. This sentence includes a <i>Mode indicator</i> field providing critical safety-related information about the heading data, and replaces the HDT sentence.				
Information	Class/ID: 0xf0 0x0e		Number of fields: 5		
Structure	\$xxTHS,headt,mi*cs\r\n				
Example	\$GPTHs,77.52,E*32\r\n				
Payload:					
Field	Name	Format	Unit	Example	Description
0	xxTHS	string	-	\$GPTHs	THS Message ID (xx = current Talker ID, see NMEA Talker IDs table)
1	headt	numeric	degrees	77.52	Heading of vehicle (true)
2	mi	character	-	E	Mode indicator: <ul style="list-style-type: none"> A = Autonomous E = Estimated (dead reckoning) M = Manual input S = Simulator V = Data not valid
3	cs	hexadecimal	-	*32	Checksum
4	CRLF	character	-	-	Carriage return and line feed

2.7.19 TXT

2.7.19.1 Text transmission

Message		NMEA-Standard-TXT			
		Text transmission			
Type	Output				
Comment	This message outputs various information on the receiver, such as power-up screen, software version etc. This message can be configured using the CFG-INFMSG configuration group.				
Information	<i>Class/ID:</i> 0xf0 0x41	<i>Number of fields:</i> 7			
Structure	\$xxTXT, numMsg, msgNum, msgType, text*cs\r\n				
Examples	\$GPTXT,01,01,02,u-blox ag - www.u-blox.com*50\r\n \$GPTXT,01,01,02,ANTARIS ATR0620 HW 00000040*67\r\n				
Payload:					
<i>Field</i>	<i>Name</i>	<i>Format</i>	<i>Unit</i>	<i>Example</i>	<i>Description</i>
0	xxTXT	string	-	\$GPTXT	TXT Message ID (xx = current Talker ID, see NMEA Talker IDs table)
1	numMsg	numeric	-	01	Total number of messages in this transmission (range: 1-99)
2	msgNum	numeric	-	01	Message number in this transmission (range: 1-numMsg)
3	msgType	numeric	-	02	Text identifier (u-blox receivers specify the type of the message with this number): <ul style="list-style-type: none"> • 00 = Error • 01 = Warning • 02 = Notice • 07 = User
4	text	string	-	www.u-blox.com	Any ASCII text
5	cs	hexadecimal	-	*67	Checksum
6	CRLF	character	-	-	Carriage return and line feed

2.7.20 VTG

2.7.20.1 Course over ground and ground speed

Message		NMEA-Standard-VTG			
		Course over ground and ground speed			
Type	Output				
Comment	Velocity is given as course over ground (COG) and speed over ground (SOG).				
Information	<i>Class/ID:</i> 0xf0 0x05	<i>Number of fields:</i> 12			
Structure	\$xxVTG, cogt, cogtUnit, cogm, cogmUnit, sogn, sognUnit, sogk, sogkUnit, posMode*cs\r\n				
Example	\$GPVTG,77.52,T,M,0.004,N,0.008,K,A*06\r\n				
Payload:					
<i>Field</i>	<i>Name</i>	<i>Format</i>	<i>Unit</i>	<i>Example</i>	<i>Description</i>
0	xxVTG	string	-	\$GPVTG	VTG Message ID (xx = current Talker ID, see NMEA Talker IDs table)
1	cogt	numeric	degrees	77.52	Course over ground (true)
2	cogtUnit	character	-	T	Course over ground units: T (degrees true, fixed field)
3	cogm	numeric	degrees	-	Course over ground (magnetic)
4	cogmUnit	character	-	M	Course over ground units: M (degrees magnetic, fixed field)

5	sogn	numeric	knots	0.004	Speed over ground
6	sognUnit	character	-	N	Speed over ground units: N (knots, fixed field)
7	sogk	numeric	km/h	0.008	Speed over ground
8	sogkUnit	character	-	K	Speed over ground units: K (kilometers per hour, fixed field)
9	posMode	character	-	A	Mode indicator, see position fix flags description (only available in NMEA 2.3 and later)
10	cs	hexadecimal	-	*06	Checksum
11	CRLF	character	-	-	Carriage return and line feed

2.7.21 ZDA

2.7.21.1 Time and date

Message	NMEA-Standard-ZDA Time and date				
Type	Output				
Comment	UTC, day, month, year and local time zone.				
Information	Class/ID: 0xf0 0x08		Number of fields: 9		
Structure	\$xxZDA,time,day,month,year,ltzh,ltzn*cs\r\n				
Example	\$GPZDA,082710.00,16,09,2002,00,00*64\r\n				
Payload:					
Field	Name	Format	Unit	Example	Description
0	xxZDA	string	-	\$GPZDA	ZDA Message ID (xx = current Talker ID, see NMEA Talker IDs table)
1	time	hhmmss.ss	-	082710.00	UTC Time. See section UTC representation in the integration manual for details.
2	day	dd	day	16	UTC day (range: 1-31)
3	month	mm	month	09	UTC month (range: 1-12)
4	year	yyyy	year	2002	UTC year
5	ltzh	xx	-	00	Local time zone hours (fixed field, always 00)
6	ltzn	zz	-	00	Local time zone minutes (fixed field, always 00)
7	cs	hexadecimal	-	*64	Checksum
8	CRLF	character	-	-	Carriage return and line feed

2.8 PUBX messages

Proprietary NMEA messages for u-blox positioning receivers. See also [NMEA-proprietary messages](#).

2.8.1 CONFIG (PUBX,41)

2.8.1.1 Set protocols and baud rate

Message	NMEA-PUBX-CONFIG Set protocols and baud rate			
Type	Set			
Comment				
Information	Class/ID: 0xf1 0x41		Number of fields: 9	

Structure \$PUBX,41,portId,inProto,outProto,baudrate,autobauding*cs\r\n

Example \$PUBX,41,1,0007,0003,19200,0*25\r\n

Payload:

Field	Name	Format	Unit	Example	Description
0	PUBX	string	-	\$PUBX	Message ID, UBX protocol header, proprietary sentence
1	msgId	numeric	-	41	Proprietary message identifier
2	portId	numeric	-	1	ID of communication port. See section Communication ports in the integration manual for details.
3	inProto	hexadecimal	-	0007	Input protocol mask. Bitmask, specifying which protocols(s) are allowed for input. See section Communication ports in the integration manual for details.
4	outProto	hexadecimal	-	0003	Output protocol mask. Bitmask, specifying which protocols(s) are allowed for input. See section Communication ports in the integration manual for details.
5	baudrate	numeric	bits/s	19200	Baud rate
6	autobauding	numeric	-	-	Autobauding: 1=enable, 0=disable (not supported on u-blox 5, set to 0)
7	cs	hexadecimal	-	*25	Checksum
8	CRLF	character	-	-	Carriage return and line feed

2.8.2 POSITION (PUBX,00)

2.8.2.1 Poll a PUBX,00 message

Message	NMEA-PUBX-POSITION Poll a PUBX,00 message				
Type	Poll request				
Comment	A PUBX,00 message is polled by sending the PUBX,00 message without any data fields.				
Information	Class/ID: 0xf1 0x00		Number of fields: 4		
Structure	\$PUBX,00*33\r\n				
Example	\$PUBX,00*33\r\n				
Payload:					
Field	Name	Format	Unit	Example	Description
0	PUBX	string	-	\$PUBX	Message ID, UBX protocol header, proprietary sentence
1	msgId	numeric	-	00	Set to 00 to poll a PUBX,00 message
2	cs	hexadecimal	-	*33	Checksum
3	CRLF	character	-	-	Carriage return and line feed

2.8.3 RATE (PUBX,40)

2.8.3.1 Set NMEA message output rate

Message	NMEA-PUBX-RATE Set NMEA message output rate				
Type	Set				
Comment	Set/Get message rate configuration (s) to/from the receiver.				

- Send rate is relative to the event a message is registered on. For example, if the rate of a navigation message is set to 2, the message is sent every second navigation solution.

Information	Class/ID: 0xf1 0x40		Number of fields: 11		
Structure	\$PUBX, 40, msgId, rddc, rus1, rus2, rusb, rspi, reserved*cs\r\n				
Example	\$PUBX, 40, GLL, 1, 0, 0, 0, 0, 0*5D\r\n				
Payload:					
Field	Name	Format	Unit	Example	Description
0	PUBX	string	-	\$PUBX	Message ID, UBX protocol header, proprietary sentence
1	ID	numeric	-	40	Proprietary message identifier
2	msgId	string	-	GLL	NMEA message identifier
3	rddc	numeric	cycles	1	output rate on DDC <ul style="list-style-type: none"> • 0 disables that message from being output on this port • 1 means that this message is output every epoch
4	rus1	numeric	cycles	1	output rate on USART 1 <ul style="list-style-type: none"> • 0 disables that message from being output on this port • 1 means that this message is output every epoch
5	rus2	numeric	cycles	1	output rate on USART 2 <ul style="list-style-type: none"> • 0 disables that message from being output on this port • 1 means that this message is output every epoch
6	rusb	numeric	cycles	1	output rate on USB <ul style="list-style-type: none"> • 0 disables that message from being output on this port • 1 means that this message is output every epoch
7	rspi	numeric	cycles	1	output rate on SPI <ul style="list-style-type: none"> • 0 disables that message from being output on this port • 1 means that this message is output every epoch
8	reserved	numeric	-	-	Reserved: always fill with 0
9	cs	hexadecimal	-	*5D	Checksum
10	CRLF	character	-	-	Carriage return and line feed

2.8.4 SVSTATUS (PUBX,03)

2.8.4.1 Poll a PUBX,03 message

Message	NMEA-PUBX-SVSTATUS Poll a PUBX,03 message				
Type	Poll request				
Comment	A PUBX,03 message is polled by sending the PUBX,03 message without any data fields.				
Information	Class/ID: 0xf1 0x03		Number of fields: 4		
Structure	\$PUBX, 03*30\r\n				
Example	\$PUBX, 03*30\r\n				
Payload:					
Field	Name	Format	Unit	Example	Description
0	PUBX	string	-	\$PUBX	Message ID, UBX protocol header, proprietary sentence
1	msgId	numeric	-	03	Set to 03 to poll a PUBX,03 message

2	cs	hexadecimal -	*30	Checksum
3	CRLF	character -	-	Carriage return and line feed

2.8.5 TIME (PUBX,04)

2.8.5.1 Poll a PUBX,04 message

Message	NMEA-PUBX-TIME Poll a PUBX,04 message				
Type	Poll request				
Comment	A PUBX,04 message is polled by sending the PUBX,04 message without any data fields.				
Information	Class/ID: 0xf1 0x04		Number of fields: 4		
Structure	\$PUBX,04*37\r\n				
Example	\$PUBX,04*37\r\n				
Payload:					
Field	Name	Format	Unit	Example	Description
0	PUBX	string	-	\$PUBX	Message ID, UBX protocol header, proprietary sentence
1	msgId	numeric	-	04	Set to 04 to poll a PUBX,04 message
2	cs	hexadecimal -		*37	Checksum
3	CRLF	character -		-	Carriage return and line feed

3 UBX protocol


3.1 UBX protocol key features

u-blox receivers support a u-blox-proprietary protocol to communicate with a host computer. This protocol has the following key features:

- Compact – uses 8-bit binary data
- Checksum protected – uses a low-overhead checksum algorithm
- Modular – uses a two-stage message identifier (Class and Message ID)

3.2 UBX frame structure

The structure of a basic UBX frame is shown in the following diagram.

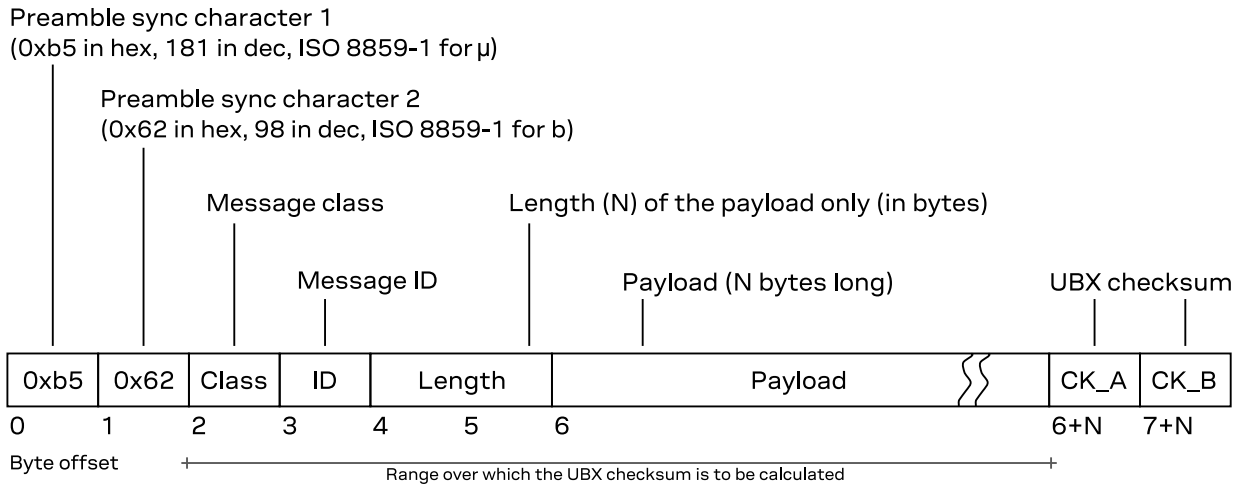

- Every *frame* starts with a 2-byte *preamble* consisting of two synchronization characters: 0xb5 and 0x62.
- A 1-byte *message class* field follows. A class is a group of messages that are related to each other.
- A 1-byte *message ID* field defines the message that is to follow.
- A 2-byte *length* field follows. The length is defined as being that of the payload only. It does not include the preamble, message class, message ID, length, or [UBX checksum](#) fields. The number format of the length field is an unsigned little-endian 16-bit integer (a "U2" in [UBX data types](#)).
- The *payload* field contains a variable number (= *length*) of bytes.
- The two 1-byte *CK_A* and *CK_B* fields hold a 16-bit checksum whose calculation is defined in [UBX checksum](#) section. This concludes the frame.

3.3 UBX payload definition rules

This section contains the rules and guidelines for UBX message payloads. See also [UBX message example](#).

3.3.1 UBX structure packing

Values are placed in such an order that structure packing is not a problem. This means that two-byte values shall start on offsets that are a multiple of two; four-byte values shall start at a multiple of four; and so on.

3.3.2 UBX reserved elements

Some messages contain reserved fields or bits to allow for future expansion. The contents of these elements should be ignored in output messages and must be set to zero in input messages. Where a message is output and subsequently returned to the receiver as an input message, reserved elements can either be explicitly set to zero or left with whatever value they were output with.

For fields in a bitfield the same rules apply. Note that bits not described are automatically reserved and are not explicitly stated (see [UBX message example](#)).

3.3.3 UBX undefined values

The description of some fields provide specific meanings for specific values. For example, the field `gnssId` appears in many UBX messages and uses 0 to indicate GPS, 1 for SBAS and so on (see [GNSS identifiers](#) for details); however it is usually stored in a byte with far more possible values than the handful currently defined. All such undefined values are reserved for future expansion and therefore should not be used.

3.3.4 UBX conditional values

Some UBX messages use validity flag fields to indicate whether the values of some value fields are valid. For example the `UBX-NAV-PVT` message has the `validDate` and `validTime` fields that indicate whether the date (`year`, `month` and `day` fields), and, respectively, the time (`hour`, `min` and `sec` fields) are valid. This means that these value fields will only contain meaningful data if the corresponding flag field is set (has the value 1).

3.3.5 UBX data types

The following data types (number formats) are defined.

Name	Type	Size (Bytes)	Range	Resolution
U1	unsigned 8-bit integer	1	$0 \dots 2^8 - 1$	1
I1	signed 8-bit integer, two's complement	1	$-2^7 \dots 2^7 - 1$	1
X1	8-bit bitfield	1	n/a	n/a
U2	unsigned little-endian 16-bit integer	2	$0 \dots 2^{16} - 1$	1
I2	signed little-endian 16-bit integer, two's complement	2	$-2^{15} \dots 2^{15} - 1$	1
X2	16-bit little-endian bitfield	2	n/a	n/a
U4	unsigned little-endian 32-bit integer	4	$0 \dots 2^{32} - 1$	1
I4	signed little-endian 32-bit integer, two's complement	4	$-2^{31} \dots 2^{31} - 1$	1
X4	32-bit little-endian bitfield	4	n/a	n/a

Name	Type	Size (Bytes)	Range	Resolution
R4	IEEE 754 single (32-bit) precision	4	$-2^{127} \dots 2^{127}$	$\sim \text{value} \cdot 2^{-24}$
R8	IEEE 754 double (64-bit) precision	8	$-2^{1023} \dots 2^{1023}$	$\sim \text{value} \cdot 2^{-53}$
CH	ASCII / ISO 8859-1 char (8-bit)	1	n/a	n/a
U _{.n}	unsigned bitfield value of <i>n</i> bits width	var.	variable	variable
I _{.n}	signed (two's complement) bitfield value of <i>n</i> bits width	var.	variable	variable
S _{.n}	signed bitfield value of <i>n</i> bits width, in sign (most significant bit) and magnitude (remaining bits) notation	var.	variable	variable

3.3.6 UBX fields scale and unit

Fields in UBX messages can have a unit defined. Whenever possible, SI units and symbols are used (e.g. "m" for meters, "s" for seconds). For civil (UTC) time representation units of years (y), months (month), days (d), hours (h), minutes (min) and seconds (s) are used.

Fields in UBX messages can have a scale factor defined. Unity (factor 1) is assumed if no scale is specified. For integer type fields this is often combined with a unit. When a scale is combined with a unit, the scale represents the smallest storage unit. For example, if meters (m) are expressed (stored) in centimeters the scale would be 0.01 (or 1e-2). This is equivalent of specifying a unit of centimeters (cm) and no scale.

3.3.7 UBX repeated fields

There are two types of repetitions in UBX messages. The first type specifies that a single field is repeated a constant number of times. This repetition is defined in the type of the field. For example, the [UBX message example](#) can specify a field `data` of type `U1[5]`. In this case the `data` field should be interpreted as an array of five U1 values.

The second type of repetition in messages is referred to as *repeated groups*, which groups one or more fields into a block of payload data. There are several types of repetition:

- The number of repetitions of *variable-by-field group* is indicated by another, earlier field in the same message. The number of repetitions can be zero or more, depending on the value of the referenced field.
- A *constant group* has a constant number of repetitions.
- An *optional group* is repeated zero or one times, depending on the available payload data. That is, the fields are present in the message only if the payload of the message is large enough to cover the whole group of fields.
- The number of repetitions of a *variable-by-size group* is given by the available payload size. The group will repeat until there is not enough payload data left to cover the whole group of fields another time.

Note that only some combinations of repeated groups of fields are possible in a single message. See also [UBX payload decoding](#).

3.3.8 UBX payload decoding

UBX message payloads are designed so that the data (fields) can be extracted by a single pass through the payload from start to end. Fixed-size messages are the trivial case where the offset of all fields is unambiguously defined. Variable-size messages have variable number of repetitions of one or multiple groups of fields. For groups where the number of repetitions is given by the value of another field, that field can always be found at a fixed offset in the message payload before the respective group of fields. Groups whose number of repetitions depend on the payload size can only

be the last group of fields in a message and only one such group may exist in a message. See also [UBX repeated fields](#).

3.4 UBX checksum

The checksum is calculated over the message, starting and including the class field up until, but excluding, the checksum fields (see the figure [UBX frame structure](#)).

The checksum algorithm used is the 8-bit Fletcher algorithm, which is used in the TCP standard [RFC 1145](#)). This algorithm works as follows:

- `Buffer[N]` is an array of bytes that contains the data over which the checksum is to be calculated.
- The two `CK_A` and `CK_B` values are 8-bit unsigned integers, only! If implementing with larger-sized integer values, make sure to mask both `CK_A` and `CK_B` with the value `0xff` after both operations in the loop.
- After the loop, the two `UI` values contain the checksum, transmitted after the message payload, which concludes the frame.

```
1 CK_A = 0, CK_B = 0
2 For (I = 0; I < N; I++)
3 {
4     CK_A = CK_A + Buffer[I]
5     CK_B = CK_B + CK_A
6 }
```

3.5 UBX message flow

There are certain features associated with the messages being sent back and forth:

3.5.1 UBX acknowledgement

When messages from the class CFG are sent to the receiver, the receiver will send an "acknowledge" ([UBX-ACK-ACK](#)) or a "not acknowledge" ([UBX-ACK-NAK](#)) message back to the sender, depending on whether or not the message was processed correctly.

Some messages from other classes also use the same acknowledgement mechanism.

3.5.2 UBX polling mechanism

All messages that are output by the receiver in a periodic manner (i.e. messages in classes UBX-MON, UBX-NAV and UBX-RXM) and Get/Set type messages, such as the configuration messages in the UBX-CFG class, can also be polled.

The UBX protocol is designed so that messages can be polled by sending the message required to the receiver but without a payload (or with just a single parameter that identifies the poll request). The receiver then responds with the same message with the payload populated.

3.6 GNSS, satellite and signal numbering

See [GNSS, satellite and signal identifiers](#) for details on how GNSS, satellites and signals are numbered in the UBX protocol.

3.7 UBX message example

This is an example of the definition of UBX messages as shown in the following sections.

Message	UBX-DEMO-EXAMPLE				
①	Example demo message				
Type ②	Periodic/pollled				
Comment	This is a comment that describes the use of the demo example message.				
③	There can be references to other sections in the documentation (such as: UBX protocol). ↪ Note that there can be important remarks here.				
Message ④	<i>Header</i>	<i>Class ID</i>	<i>Length (bytes)</i>	<i>Payload</i>	<i>Checksum</i>
Structure	0xb5 0x62 0x01 0x07		16 + numRepeat*4	see below	CK_A CK_B
Payload description: ⑤					
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>
0	U4	aField	-	-	a field that contains an unsigned integer with no particular scale or unit
4	I4	anotherField	1e-2	m	a field that contains a length in meters (m) with a scale of 1e-2 (= 0.01), i.e. a length in centimeters
8	X2	bitfield ⑥	-	-	this field contains flags or values smaller than one byte, whose definition follows below (bits not described are reserved)
	bit 0 U:1	aFieldValid	-	-	the first bit in bitfield indicates whether the aField is valid or not (see UBX conditional values)
	bit 1 U:1	someFlag	-	-	the second bit is a flag (1 = true, 0 = false)
	bits 5...2 U:4	aBitFieldValue	-	-	a 4-bits value (range: 0...15)
10	U1[5] ⑦	reserved0	-	-	a reserved field, whose value shall be ignored (in output messages) or set to 0 (in input messages)
15	U1	numRepeat	-	-	number of repetitions in the group of fields below
Start of repeated group (<i>numRepeat times</i>) ⑧					
16 + n*4	I2	someValue	-	-	a signed value in a repeated group of fields
18 + n*4	U2	anotherValue	-	-	another value in a repeated group of fields
End of repeated group (<i>numRepeat times</i>)					

① The first line shows the message name (see [Naming](#)). The second line shows a short description of the message.

② The message type (see [Message types](#)).

③ This section contains comments that describe the message. Often links to other related sections in the documentation or other related messages are found here.

④ The message structure gives the parameters for the [UBX frame structure](#), notably the message class and message ID values and the payload length. For many messages the payload length is a fixed number (of bytes). Messages that contain repeated blocks of information (fields) have a variable payload (see [UBX repeated fields](#)).

⑤ The message payload definition is given as a list of fields and their parameters. Each field starts at a specified offset (in bytes) in the payload (see also [UBX structure packing](#)), is of a specific type

(see [UBX data types](#)), has a unique name (within the message), and a description. Optionally, fields can have a scale and/or a unit (see [UBX fields scale and unit](#)).

6 Bitfields ("X" types) are broken down into smaller parts. Each part can be one or more bits wide. Values that are two or more bits wide can be unsigned or one of two signed value representation (see [UBX data types](#)). Note that the ten unused bits 15...6 are not explicitly stated as [UBX reserved elements](#).

7 Fields can be arrays of values of the same type (see [UBX repeated fields](#)).

8 Groups of fields can be repeated in the payload. The number of repetitions can be given by another field in the message (this example), a constant number, zero or one times (known as "optional group"), or derived from the remaining payload size (labeled as "repeated N times"). See also [UBX repeated fields](#) and [UBX payload decoding](#).

3.8 UBX messages overview

Message	Class/ID	Description (Type)
UBX-ACK – Acknowledgement and negative acknowledgement messages		
UBX-ACK-ACK	0x05 0x01	• Message acknowledged (Output)
UBX-ACK-NAK	0x05 0x00	• Message not acknowledged (Output)
UBX-CFG – Configuration and command messages		
UBX-CFG-RST	0x06 0x04	• Reset receiver / Clear backup data structures (Command)
UBX-CFG-SPT	0x06 0x64	• Configure and start a sensor production test (Get/set)
UBX-CFG-VALDEL	0x06 0x8c	• Delete configuration item values (Set) • Delete configuration item values (with transaction) (Set)
UBX-CFG-VALGET	0x06 0x8b	• Get configuration items (Poll request) • Configuration items (Polled)
UBX-CFG-VALSET	0x06 0x8a	• Set configuration item values (Set) • Set configuration item values (with transaction) (Set)
UBX-ESF – External sensor fusion messages		
UBX-ESF-ALG	0x10 0x14	• IMU alignment information (Periodic/polled)
UBX-ESF-INS	0x10 0x15	• Vehicle dynamics information (Periodic/polled)
UBX-ESF-MEAS	0x10 0x02	• External sensor fusion measurements (Input/output)
UBX-ESF-RAW	0x10 0x03	• Raw sensor measurements (Output)
UBX-ESF-STATUS	0x10 0x10	• External sensor fusion status (Periodic/polled)
UBX-INF – Information messages		
UBX-INF-DEBUG	0x04 0x04	• ASCII output with debug contents (Output)
UBX-INF-ERROR	0x04 0x00	• ASCII output with error contents (Output)
UBX-INF-NOTICE	0x04 0x02	• ASCII output with informational contents (Output)
UBX-INF-TEST	0x04 0x03	• ASCII output with test contents (Output)
UBX-INF-WARNING	0x04 0x01	• ASCII output with warning contents (Output)
UBX-MGA – GNSS assistance (A-GNSS) messages		
UBX-MGA-ACK	0x13 0x60	• Multiple GNSS acknowledge message (Output)
UBX-MGA-BDS	0x13 0x03	• BeiDou ephemeris assistance (Input) • BeiDou almanac assistance (Input) • BeiDou health assistance (Input) • BeiDou UTC assistance (Input) • BeiDou ionosphere assistance (Input)
UBX-MGA-DBD	0x13 0x80	• Poll the navigation database (Poll request)

Message	Class/ID	Description (Type)
		<ul style="list-style-type: none"> Navigation database dump entry (Input/output)
UBX-MGA-GAL	0x13 0x02	<ul style="list-style-type: none"> Galileo ephemeris assistance (Input) Galileo almanac assistance (Input) Galileo GPS time offset assistance (Input) Galileo UTC assistance (Input)
UBX-MGA-GLO	0x13 0x06	<ul style="list-style-type: none"> GLONASS ephemeris assistance (Input) GLONASS almanac assistance (Input) GLONASS auxiliary time offset assistance (Input)
UBX-MGA-GPS	0x13 0x00	<ul style="list-style-type: none"> GPS ephemeris assistance (Input) GPS almanac assistance (Input) GPS health assistance (Input) GPS UTC assistance (Input) GPS ionosphere assistance (Input)
UBX-MGA-INI	0x13 0x40	<ul style="list-style-type: none"> Initial position assistance (Input) Initial time assistance (Input) Initial clock drift assistance (Input) Initial frequency assistance (Input)
UBX-MGA-QZSS	0x13 0x05	<ul style="list-style-type: none"> QZSS ephemeris assistance (Input) QZSS almanac assistance (Input) QZSS health assistance (Input)
UBX-MON – Monitoring messages		
UBX-MON-COMMS	0x0a 0x36	<ul style="list-style-type: none"> Communication port information (Periodic/pollled)
UBX-MON-GNSS	0x0a 0x28	<ul style="list-style-type: none"> Information message major GNSS selection (Polled)
UBX-MON-HW	0x0a 0x09	<ul style="list-style-type: none"> Hardware status (Periodic/pollled)
UBX-MON-HW2	0x0a 0x0b	<ul style="list-style-type: none"> Extended hardware status (Periodic/pollled)
UBX-MON-HW3	0x0a 0x37	<ul style="list-style-type: none"> I/O pin status (Periodic/pollled)
UBX-MON-IO	0x0a 0x02	<ul style="list-style-type: none"> I/O system status (Periodic/pollled)
UBX-MON-MSGPP	0x0a 0x06	<ul style="list-style-type: none"> Message parse and process status (Periodic/pollled)
UBX-MON-PATCH	0x0a 0x27	<ul style="list-style-type: none"> Installed patches (Polled)
UBX-MON-RF	0x0a 0x38	<ul style="list-style-type: none"> RF information (Periodic/pollled)
UBX-MON-RXBUF	0x0a 0x07	<ul style="list-style-type: none"> Receiver buffer status (Periodic/pollled)
UBX-MON-RXR	0x0a 0x21	<ul style="list-style-type: none"> Receiver status information (Output)
UBX-MON-SPAN	0x0a 0x31	<ul style="list-style-type: none"> Signal characteristics (Periodic/pollled)
UBX-MON-SPT	0x0a 0x2f	<ul style="list-style-type: none"> Sensor production test (Polled)
UBX-MON-TXBUF	0x0a 0x08	<ul style="list-style-type: none"> Transmitter buffer status (Periodic/pollled)
UBX-MON-VER	0x0a 0x04	<ul style="list-style-type: none"> Receiver and software version (Polled)
UBX-NAV – Navigation solution messages		
UBX-NAV-ATT	0x01 0x05	<ul style="list-style-type: none"> Attitude solution (Periodic/pollled)
UBX-NAV-CLOCK	0x01 0x22	<ul style="list-style-type: none"> Clock solution (Periodic/pollled)
UBX-NAV-COV	0x01 0x36	<ul style="list-style-type: none"> Covariance matrices (Periodic/pollled)
UBX-NAV-DOP	0x01 0x04	<ul style="list-style-type: none"> Dilution of precision (Periodic/pollled)
UBX-NAV-EELL	0x01 0x3d	<ul style="list-style-type: none"> Position error ellipse parameters (Periodic/pollled)
UBX-NAV-EOE	0x01 0x61	<ul style="list-style-type: none"> End of epoch (Periodic)
UBX-NAV-GEOFENCE	0x01 0x39	<ul style="list-style-type: none"> Geofencing status (Periodic/pollled)
UBX-NAV-HPPOSECEF	0x01 0x13	<ul style="list-style-type: none"> High precision position solution in ECEF (Periodic/pollled)
UBX-NAV-HPPOSLLH	0x01 0x14	<ul style="list-style-type: none"> High precision geodetic position solution (Periodic/pollled)
UBX-NAV-ORB	0x01 0x34	<ul style="list-style-type: none"> GNSS orbit database info (Periodic/pollled)

Message	Class/ID	Description (Type)
UBX-NAV-POSECEF	0x01 0x01	• Position solution in ECEF (Periodic/pollled)
UBX-NAV-POSLLH	0x01 0x02	• Geodetic position solution (Periodic/pollled)
UBX-NAV-PVAT	0x01 0x17	• Navigation position velocity attitude time solution (Periodic/pollled)
UBX-NAV-PVT	0x01 0x07	• Navigation position velocity time solution (Periodic/pollled)
UBX-NAV-RELPOSNED	0x01 0x3c	• Relative positioning information in NED frame (Periodic/pollled)
UBX-NAV-SAT	0x01 0x35	• Satellite information (Periodic/pollled)
UBX-NAV-SBAS	0x01 0x32	• SBAS status data (Periodic/pollled)
UBX-NAV-SIG	0x01 0x43	• Signal information (Periodic/pollled)
UBX-NAV-SLAS	0x01 0x42	• QZSS L1S SLAS status data (Periodic/pollled)
UBX-NAV-STATUS	0x01 0x03	• Receiver navigation status (Periodic/pollled)
UBX-NAV-TIMEBDS	0x01 0x24	• BeiDou time solution (Periodic/pollled)
UBX-NAV-TIMEGAL	0x01 0x25	• Galileo time solution (Periodic/pollled)
UBX-NAV-TIMEGLO	0x01 0x23	• GLONASS time solution (Periodic/pollled)
UBX-NAV-TIMEGPS	0x01 0x20	• GPS time solution (Periodic/pollled)
UBX-NAV-TIMELS	0x01 0x26	• Leap second event information (Periodic/pollled)
UBX-NAV-TIMEQZSS	0x01 0x27	• QZSS time solution (Periodic/pollled)
UBX-NAV-TIMEUTC	0x01 0x21	• UTC time solution (Periodic/pollled)
UBX-NAV-VELECEF	0x01 0x11	• Velocity solution in ECEF (Periodic/pollled)
UBX-NAV-VELNED	0x01 0x12	• Velocity solution in NED frame (Periodic/pollled)
UBX-RXM – Receiver manager messages		
UBX-RXM-COR	0x02 0x34	• Differential correction input status (Output)
UBX-RXM-MEASX	0x02 0x14	• Satellite measurements for RRLP (Periodic/pollled)
UBX-RXM-PMREQ	0x02 0x41	• Power management request (Command)
UBX-RXM-RAWX	0x02 0x15	• Multi-GNSS raw measurements (Periodic/pollled)
UBX-RXM-RLM	0x02 0x59	• Galileo SAR short-RLM report (Output) • Galileo SAR long-RLM report (Output)
UBX-RXM-RTCM	0x02 0x32	• RTCM input status (Output)
UBX-RXM-SPARTN	0x02 0x33	• SPARTN input status (Output)
UBX-SEC – Security messages		
UBX-SEC-SIG	0x27 0x09	• Signal security information (Periodic/pollled)
UBX-SEC-UNIQID	0x27 0x03	• Unique chip ID (Output)
UBX-TIM – Timing messages		
UBX-TIM-TM2	0x0d 0x03	• Time mark data (Periodic/pollled)
UBX-TIM-TP	0x0d 0x01	• Time pulse time data (Periodic/pollled)
UBX-TIM-VRFY	0x0d 0x06	• Sourced time verification (Periodic/pollled)
UBX-UPD – Firmware update messages		
UBX-UPD-SOS	0x09 0x14	• Poll backup restore status (Poll request) • Create backup in flash (Command) • Clear backup in flash (Command) • Backup creation acknowledge (Output) • System restored from backup (Output)

3.9 UBX-ACK (0x05)

The messages in the UBX-ACK class are used to indicate acknowledgement or rejection (i.e. negative acknowledgement) of input messages, such as UBX-CFG messages.

3.9.1 UBX-ACK-ACK (0x05 0x01)

3.9.1.1 Message acknowledged

Message	UBX-ACK-ACK					
	Message acknowledged					
<i>Type</i>	Output					
<i>Comment</i>	Output upon processing of an input message. A UBX-ACK-ACK is sent as soon as possible but at least within one second.					
<i>Message structure</i>	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x05	0x01	2	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	clsID	-	-	Class ID of the Acknowledged Message	
1	U1	msgID	-	-	Message ID of the Acknowledged Message	

3.9.2 UBX-ACK-NAK (0x05 0x00)

3.9.2.1 Message not acknowledged

Message	UBX-ACK-NAK					
	Message not acknowledged					
<i>Type</i>	Output					
<i>Comment</i>	Output upon processing of an input message. A UBX-ACK-NAK is sent as soon as possible but at least within one second.					
<i>Message structure</i>	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x05	0x00	2	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	clsID	-	-	Class ID of the Not-Acknowledged Message	
1	U1	msgID	-	-	Message ID of the Not-Acknowledged Message	

3.10 UBX-CFG (0x06)

The messages in the UBX-CFG class are used to configure the receiver and poll current configuration values as well as for sending commands to the receiver. Unless stated otherwise, any message in this class sent to the receiver is either acknowledged (by a [UBX-ACK-ACK](#) message) if processed successfully or rejected (with a [UBX-ACK-NAK](#) message) if processed unsuccessfully.

3.10.1 UBX-CFG-RST (0x06 0x04)

3.10.1.1 Reset receiver / Clear backup data structures

Message	UBX-CFG-RST
	Reset receiver / Clear backup data structures
<i>Type</i>	Command

Comment	Do not expect this message to be acknowledged by the receiver.					
	<ul style="list-style-type: none"> • Newer FW version will not acknowledge this message at all. • Older FW version will acknowledge this message but the acknowledge may not be sent completely before the receiver is reset. 					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x06	0x04	4	see below	CK_A CK_B
Payload description:						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	X2	navBbrMask	-	-	BBR sections to clear. The following special sets apply: <ul style="list-style-type: none"> • 0x0000 Hot start • 0x0001 Warm start • 0xFFFF Cold start 	
bit 0	U:1	eph	-	-	Ephemeris	
bit 1	U:1	alm	-	-	Almanac	
bit 2	U:1	health	-	-	Health	
bit 3	U:1	klob	-	-	Klobuchar parameters	
bit 4	U:1	pos	-	-	Position	
bit 5	U:1	clkd	-	-	Clock drift	
bit 6	U:1	osc	-	-	Oscillator parameter	
bit 7	U:1	utc	-	-	UTC correction + GPS leap seconds parameters	
bit 8	U:1	rtc	-	-	RTC	
bit 11	U:1	sfdr	-	-	SFDR Parameters (only available on the ADR/UDR/HPS product variant) and weak signal compensation estimates	
bit 12	U:1	vmon	-	-	SFDR Vehicle Monitoring Parameter (only available on the ADR/UDR/HPS product variant)	
bit 13	U:1	tct	-	-	TCT Parameters (only available on the ADR/UDR/HPS product variant)	
bit 15	U:1	aop	-	-	Autonomous orbit parameters	
2	U1	resetMode	-	-	Reset Type <ul style="list-style-type: none"> • 0x00 = Hardware reset (watchdog) immediately • 0x01 = Controlled software reset • 0x02 = Controlled software reset (GNSS only) • 0x04 = Hardware reset (watchdog) after shutdown • 0x08 = Controlled GNSS stop • 0x09 = Controlled GNSS start 	
3	U1	reserved0	-	-	Reserved	

3.10.2 UBX-CFG-SPT (0x06 0x64)

3.10.2.1 Configure and start a sensor production test

Message	UBX-CFG-SPT Configure and start a sensor production test
Type	Get/set
Comment	The production test uses the built-in self-test capabilities of an attached sensor. This message is only supported if a sensor is directly connected to the u-blox receiver.

Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x06	0x64	12	see below	CK_A CK_B

Payload description:

Byte offset	Type	Name	Scale	Unit	Description
0	U1	version	-	-	Message version (0x00 for this version)
1	U1	reserved0	-	-	Reserved
2	U2	sensorId	-	-	ID of the sensor to be tested; see UBX-MON-SPT for defined IDs
4	U1[8]	reserved1	-	-	Reserved

3.10.3 UBX-CFG-VALDEL (0x06 0x8c)

3.10.3.1 Delete configuration item values

Message	UBX-CFG-VALDEL					
Type	Delete configuration item values					
Type	Set					
Comment	<p>Overview:</p> <ul style="list-style-type: none"> This message can be used to delete saved configuration to effectively revert the item values to defaults. This message can delete saved configuration from the flash configuration layer and the BBR configuration layer. The changes will not be effective until these layers are loaded into the RAM layer. This message is limited to containing a maximum of 64 keys up for deletion; i.e. N is a maximum of 64. This message can be used multiple times and every time the result will be applied immediately. To send this message multiple times with the result being applied at the end, see version 1 of UBX-CFG-VALDEL that supports transactions. This message does not check if the resulting configuration is valid. See Receiver configuration for details. <p>This message returns a UBX-ACK-NAK and no configuration is applied:</p> <ul style="list-style-type: none"> if any key is unknown to the receiver FW if the layer's bitfield does not specify a layer to delete a value from. <p>Notes:</p> <ul style="list-style-type: none"> If a key is sent multiple times within the same message, then the value is effectively deleted only once. Attempting to delete items that have not been set before, or that have already been deleted, is considered a valid request. 					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x06	0x8c	4 + [0..n]·4	see below	CK_A CK_B
<i>Payload description:</i>						
Byte offset	Type	Name	Scale	Unit	Description	
0	U1	version	-	-	Message version (0x00 for this version)	
1	X1	layers	-	-	The layers where the configuration should be deleted from	
bit 1	U:1	bbr	-	-	Delete configuration from the BBR layer	
bit 2	U:1	flash	-	-	Delete configuration from the Flash layer	
2	U1[2]	reserved0	-	-	Reserved	
<i>Start of repeated group (N times)</i>						
4 + n·4	U4	keys	-	-	Configuration key IDs of the configuration items to be deleted	
<i>End of repeated group (N times)</i>						

3.10.3.2 Delete configuration item values (with transaction)

Message	UBX-CFG-VALDEL					
	Delete configuration item values (with transaction)					
Type	Set					
Comment	<p>Overview:</p> <ul style="list-style-type: none"> This message can be used to delete saved configuration to effectively revert them to defaults. This message can delete saved configuration from the flash configuration layer and the BBR configuration layer. The changes will not be effective until these layers are loaded into the RAM layer. This message is limited to containing a maximum of 64 keys up for deletion; i.e. N is a maximum of 64. This message can be used multiple times with the result being managed within a transaction. This message does not check if the resulting configuration is valid. See Receiver configuration for details. See version 0 of UBX-CFG-VALDEL for simplified version of this message. <p>This message returns a UBX-ACK-NAK, cancels any started transaction, and no configuration is applied:</p> <ul style="list-style-type: none"> if any key within a transaction is unknown to the receiver FW if an invalid transaction state transition is requested if the layer's bitfield changes within a transaction if the layer's bitfield does not specify a layer to delete a value from. <p>Notes:</p> <ul style="list-style-type: none"> Any request for another UBX-CFG- message type (including UBX-CFG-VALSET and UBX-CFG-VALGET) will cancel any started transaction, and no configuration is applied. This message can be sent with no keys to delete for the purposes of managing the transaction state transition. If a key is sent multiple times within the same message or within the same transaction, then the value is effectively deleted only once. Attempting to delete items that have not been set before, or that have already been deleted, is considered a valid request. 					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x06	0x8c	4 + [0..n]·4	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	version	-	-	Message version (0x01 for this version)	
1	X1	layers	-	-	The layers where the configuration should be deleted from	
bit 1	U:1	bbr	-	-	Delete configuration from the BBR layer	
bit 2	U:1	flash	-	-	Delete configuration from the Flash layer	
2	X1	transaction	-	-	Transaction action to be applied:	
bits 1...0	U:2	action	-	-	Transaction action to be applied: <ul style="list-style-type: none"> 0 = Transactionless UBX-CFG-VALDEL: In the next UBX-CFG-VALDEL, it can be either 0 or 1. If a transaction has not yet been started, the incoming configuration is applied. If a transaction has already been started, cancels any started transaction and the incoming configuration is applied. 1 = (Re)Start deletion transaction: In the next UBX-CFG-VALDEL, it can be either 0, 1, 2 or 3. If a transaction has not yet been started, a transaction will be started. If a transaction has already been started, restarts the transaction, effectively removing all previous non-applied UBX-CFG-VALDEL messages. 2 = Deletion transaction ongoing: In the next UBX-CFG-VALDEL, it can be either 0, 1, 2 or 3. 3 = Apply and end a deletion transaction: In the next UBX-CFG-VALDEL, it can be either 0 or 1. 	

3	U1	reserved0	-	-	Reserved
<i>Start of repeated group (N times)</i>					
4 + n·4	U4	keys	-	-	Configuration key IDs of the configuration items to be deleted
<i>End of repeated group (N times)</i>					

3.10.4 UBX-CFG-VALGET (0x06 0x8b)

3.10.4.1 Get configuration items

Message	UBX-CFG-VALGET					
	Get configuration items					
Type	Poll request					
Comment	<p>Overview:</p> <ul style="list-style-type: none"> This message is used to get configuration values by providing a list of configuration key IDs, which identify the configuration items to retrieve. This message can specify the configuration layer where the values of the specified configuration items are retrieved from. This message is limited to containing a maximum of 64 key IDs. See Receiver configuration for details. <p>This message returns a UBX-ACK-NAK:</p> <ul style="list-style-type: none"> if any key is unknown to the receiver FW if the layer field specifies an invalid layer to get the value from if the keys array specifies more than 64 key IDs. <p>Notes:</p> <ul style="list-style-type: none"> If a value is requested multiple times within the same poll request, then the reply will contain it multiple times. The provided keys can be complete key values (group and item specifiers) or wild-card specifications. A complete key value will constitute a request for one key-value pair. A key value that has a valid group specifier and 0xffff in the item part of the key value (bits 0-15) constitutes a request for all items in the specified group. A key with a value of 0xfff in the group part of the key value (bits 16-27) is a request for all items known to the receiver in all groups. The response message is limited to containing a maximum of 64 key-value pairs. If there are wild-card specifications then there may be more than 64 possible responses. In order to handle this, the 'position' field can specify that the response message should skip this number of key-value pairs before it starts constructing the message. This allows a large set of values to be retrieved 64 at a time. If the response contains less than 64 key-value pairs then all values have been reported, otherwise there may be more to read. It is not possible to retrieve configuration values for the same configuration item from multiple configuration layers. Separate poll requests must be made for each desired layer. 					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x06	0x8b	4 + [0..n]·4	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	version	-	-	Message version (0x00 for this version)	
1	U1	layer	-	-	The layer from which the configuration items should be retrieved: <ul style="list-style-type: none"> 0 - RAM layer 1 - BBR layer 2 - Flash layer 7 - Default layer 	
2	U2	position	-	-	Skip this many key values before constructing output message	
<i>Start of repeated group (N times)</i>						

4 + n·4	U4	keys	-	-	Configuration key IDs of the configuration items to be retrieved
---------	----	------	---	---	--

End of repeated group (N times)

3.10.4.2 Configuration items

Message	UBX-CFG-VALGET				
	Configuration items				
Type	Polled				
Comment	This message is output by the receiver to return requested configuration data (key and value pairs). See Receiver configuration for details.				
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>
	0xb5 0x62	0x06	0x8b	4 + [0..n]	see below
<i>Payload description:</i>					
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>
0	U1	version	-	-	Message version (0x01 for this version)
1	U1	layer	-	-	The layer from which the configuration item was retrieved: <ul style="list-style-type: none"> 0 - RAM layer 1 - BBR 2 - Flash 7 - Default
2	U2	position	-	-	Number of configuration items skipped in the result set before constructing this message (mirrors the equivalent field in the request message)
<i>Start of repeated group (N times)</i>					
4 + n	U1	cfgData	-	-	Configuration data (key and value pairs)
<i>End of repeated group (N times)</i>					

3.10.5 UBX-CFG-VALSET (0x06 0x8a)

3.10.5.1 Set configuration item values

Message	UBX-CFG-VALSET				
	Set configuration item values				
Type	Set				
Comment	<p>Overview:</p> <ul style="list-style-type: none"> This message is used to set a configuration by providing configuration data (a list of key and value pairs), which identify the configuration items to change, and their new values. This message is limited to containing a maximum of 64 key-value pairs. This message can be used multiple times and every time the result will be applied immediately. To send this message multiple times with the result being applied at the end, see version 1 of UBX-CFG-VALSET that supports transactions. See Receiver configuration for details. <p>This message returns a UBX-ACK-NAK and no configuration is applied:</p> <ul style="list-style-type: none"> if any key is unknown to the receiver FW if the layer's bitfield does not specify a layer to save a value to if the requested configuration is not valid. The validity of a configuration is checked only if the message requests to apply the configuration to the RAM configuration layer. <p>Notes:</p> <ul style="list-style-type: none"> If a key is sent multiple times within the same message, then the value eventually being applied is the last sent. 				

Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x06	0x8a	4 + [0..n]	see below	CK_A CK_B
<i>Payload description:</i>						
Byte offset	Type	Name	Scale	Unit	Description	
0	U1	version	-	-	Message version (0x00 for this version)	
1	X1	layers	-	-	The layers where the configuration should be applied	
bit 0	U:1	ram	-	-	Update configuration in the RAM layer	
bit 1	U:1	bbr	-	-	Update configuration in the BBR layer	
bit 2	U:1	flash	-	-	Update configuration in the Flash layer	
2	U1[2]	reserved0	-	-	Reserved	
<i>Start of repeated group (N times)</i>						
4 + n	U1	cfgData	-	-	Configuration data (key and value pairs)	
<i>End of repeated group (N times)</i>						

3.10.5.2 Set configuration item values (with transaction)

Message	UBX-CFG-VALSET
	Set configuration item values (with transaction)
Type	Set
Comment	<p>Overview:</p> <ul style="list-style-type: none"> This message is used to set a configuration by providing configuration data (a list of key and value pairs), which identify the configuration items to change, and their new values. This message is limited to containing a maximum of 64 key-value pairs. This message can be used multiple times with the result being managed within a transaction. Within a transaction there is no limit on the number key-value pairs; a transaction is effectively limited to the number of known keys. See Receiver configuration for details. See version 0 of UBX-CFG-VALSET for simplified version of this message. <p>This message returns a UBX-ACK-NAK, cancels any started transaction, and no configuration is applied:</p> <ul style="list-style-type: none"> if any key within a transaction is unknown to the receiver FW if an invalid transaction state transition is requested if the layer's bitfield changes within a transaction if the layer's bitfield does not specify a layer to save a value to <p>This message returns a UBX-ACK-NAK, and no configuration is applied:</p> <ul style="list-style-type: none"> if the requested configuration is not valid. While in a transaction context, only the last message that requests to apply the transaction returns a UBX-ACK-NAK. The validity of a configuration is checked only if the message requests to apply the configuration to the RAM configuration layer. This also applies to a transactionless request. <p>Notes:</p> <ul style="list-style-type: none"> Any request for another UBX-CFG-message type (including UBX-CFG-VALDEL and UBX-CFG-VALGET) will cancel any started transaction, and no configuration is applied. This message can be sent with no key/values to set for the purposes of managing the transaction state transition. If a key is sent multiple times within the same message or within the same transaction, then the value eventually being applied is the last sent.

Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x06	0x8a	4 + [0..n]	see below	CK_A CK_B
<i>Payload description:</i>						
Byte offset	Type	Name	Scale	Unit	Description	
0	U1	version	-	-	Message version (0x01 for this version)	
1	X1	layers	-	-	The layers where the configuration should be applied	
bit 0	U:1	ram	-	-	Update configuration in the RAM layer	

bit 1	U:1	bbr	-	-	Update configuration in the BBR layer
bit 2	U:1	flash	-	-	Update configuration in the Flash layer
2	U1	transaction	-	-	Transaction action to be applied
bits 1...0	U:2	action	-	-	Transaction action to be applied: <ul style="list-style-type: none"> 0 = Transactionless UBX-CFG-VALSET: In the next UBX-CFG-VALSET, it can be either 0 or 1. If a transaction has not yet been started, the incoming configuration is applied (if valid). If a transaction has already been started, cancels any started transaction and the incoming configuration is applied (if valid). 1 = (Re)Start set transaction: In the next UBX-CFG-VALSET, it can be either 0, 1, 2 or 3. If a transaction has not yet been started, a transaction will be started. If a transaction has already been started, restarts the transaction, effectively removing all previous non-applied UBX-CFG-VALSET messages. 2 = Set transaction ongoing: In the next UBX-CFG-VALSET, it can be either 0, 1, 2 or 3. 3 = Apply and end a set transaction: In the next UBX-CFG-VALSET, it can be either 0 or 1.
3	U1	reserved0	-	-	Reserved
<i>Start of repeated group (N times)</i>					
4 + n	U1	cfgData	-	-	Configuration data (key and value pairs)
<i>End of repeated group (N times)</i>					

3.11 UBX-ESF (0x10)

The messages in the UBX-ESF class are used to output external sensor fusion information from the receiver.

3.11.1 UBX-ESF-ALG (0x10 0x14)

3.11.1.1 IMU alignment information

Message	UBX-ESF-ALG					
	IMU alignment information					
<i>Type</i>	Periodic/pollled					
<i>Comment</i>	This message outputs the IMU alignment angles which define the rotation from the installation-frame to the IMU-frame. In addition, it indicates the automatic IMU-mount alignment status.					
<i>Message structure</i>	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x10	0x14	16	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	U1	version	-	-	Message version (0x01 for this version)	
5	U1	flags	-	-	Flags	
	bit 0	U:1	autoMntAlgOn	-	-	Automatic IMU-mount alignment on/off bit (0: automatic alignment is not running, 1: automatic alignment is running)

bits 3...1	U:3	status	-	-	Status of the IMU-mount alignment (0: user-defined/ fixed angles are used, 1: IMU-mount roll/pitch angles alignment is ongoing, 2: IMU-mount roll/pitch/yaw angles alignment is ongoing, 3: coarse IMU-mount alignment are used, 4: fine IMU-mount alignment are used)
6	U1	error	-	-	Flags
bit 0	U:1	tiltAlgError	-	-	IMU-mount tilt (roll and/or pitch) alignment error (0: no error, 1: error)
bit 1	U:1	yawAlgError	-	-	IMU-mount yaw alignment error (0: no error, 1: error)
bit 2	U:1	angleError	-	-	IMU-mount misalignment Euler angle singularity error (0: no error, 1: error). If this error bit is set, the IMU-mount roll and IMU-mount yaw angles cannot uniquely be defined due to the singularity issue happening with installations mounted with a +/- 90 degrees misalignment around pitch axis. This is also known as the 'gimbal-lock' problem affecting rotations described by Euler angles.
7	U1	reserved0	-	-	Reserved
8	U4	yaw	1e-2	deg	IMU-mount yaw angle [0, 360]
12	I2	pitch	1e-2	deg	IMU-mount pitch angle [-90, 90]
14	I2	roll	1e-2	deg	IMU-mount roll angle [-180, 180]

3.11.2 UBX-ESF-INS (0x10 0x15)

3.11.2.1 Vehicle dynamics information

Message	UBX-ESF-INS					
	Vehicle dynamics information					
<i>Type</i>	Periodic/pollled					
<i>Comment</i>	This message outputs information about the vehicle dynamics. The output dynamics information (angular rates and accelerations) are expressed with respect to the vehicle-frame.					
<i>Message structure</i>	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x10	0x15	36	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U4	bitfield0	-	-	Bitfield	
bits 7...0	U:8	version	-	-	Message version (0x01 for this version)	
bit 8	U:1	xAngRateValid	-	-	Compensated x-axis angular rate data validity flag (0: not valid, 1: valid).	
bit 9	U:1	yAngRateValid	-	-	Compensated y-axis angular rate data validity flag (0: not valid, 1: valid).	
bit 10	U:1	zAngRateValid	-	-	Compensated z-axis angular rate data validity flag (0: not valid, 1: valid).	
bit 11	U:1	xAccelValid	-	-	Compensated x-axis acceleration data validity flag (0: not valid, 1: valid).	
bit 12	U:1	yAccelValid	-	-	Compensated y-axis acceleration data validity flag (0: not valid, 1: valid).	
bit 13	U:1	zAccelValid	-	-	Compensated z-axis acceleration data validity flag (0: not valid, 1: valid).	

4	U1[4]	reserved0	-	-	Reserved
8	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.
12	I4	xAngRate	1e-3	deg/s	Compensated x-axis angular rate.
16	I4	yAngRate	1e-3	deg/s	Compensated y-axis angular rate.
20	I4	zAngRate	1e-3	deg/s	Compensated z-axis angular rate.
24	I4	xAccel	1e-2	m/s ²	Compensated x-axis acceleration (gravity-free).
28	I4	yAccel	1e-2	m/s ²	Compensated y-axis acceleration (gravity-free).
32	I4	zAccel	1e-2	m/s ²	Compensated z-axis acceleration (gravity-free).

3.11.3 UBX-ESF-MEAS (0x10 0x02)

3.11.3.1 External sensor fusion measurements

Message	UBX-ESF-MEAS External sensor fusion measurements					
Type	Input/output					
Comment	Contains sensor measurements with timestamp. Optionally, can include timestamp that the message was received at the receiver. Multiple measurements can be included in a single message. (1 measurement per sensor type.) See section Sensor data types in the integration manual for details.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x10	0x02	8 + numMeas·4 + [0,1]·4	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U4	timeTag	-	-	Time tag of measurement generated by external sensor	
4	X2	flags	-	-	Flags. Set all unused bits to zero.	
bits 1...0	U:2	timeMarkSent	-	-	Time mark signal was supplied just prior to sending this message: 0 = none, 1 = on Ext0, 2 = on Ext1	
bit 2	U:1	timeMarkEdge	-	-	Trigger on rising (0) or falling (1) edge of time mark signal	
bit 3	U:1	calibTtagValid	-	-	Calibration time tag available. Always set to zero.	
bits 15...11	U:5	numMeas	-	-	Number of measurements contained in this message (optional, can be obtained from message size)	
6	U2	id	-	-	Identification number of data provider	
Start of repeated group (numMeas times)						
8 + n·4	X4	data	-	-	data	
bits 23...0	U:24	dataField	-	-	Data	
bits 29...24	U:6	dataType	-	-	Type of data (0 = no data; 1..63 = data type)	
End of repeated group (numMeas times)						
Start of optional group						
8 + numMeas·4	U4	calibTtag	-	ms	Receiver local time calibrated. This field must not be supplied when calibTtagValid is set to 0.	

End of optional group

3.11.4 UBX-ESF-RAW (0x10 0x03)

3.11.4.1 Raw sensor measurements

Message	UBX-ESF-RAW					
	Raw sensor measurements					
Type	Output					
Comment	<p>The message contains measurements from the active inertial sensors connected to the GNSS receiver directly via hardware interface. Possible data types for the <code>data</code> field are accelerometer, gyroscope and temperature readings.</p> <p>The output rate depends on the output rate of the inertial sensors connected. It includes one sample of every data type per message.</p> <p>See section Raw sensor data output in the integration manual for details.</p>					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x10	0x03	4 + [0..n]·8	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1[4]	reserved0	-	-	Reserved	
<i>Start of repeated group (N times)</i>						
4 + n·8	X4	data	-	-	data Same as in UBX-ESF-MEAS	
bits 23...0	U ₂₄	dataField	-	-	data	
bits 31...24	U ₈	dataType	-	-	type of data (0 = no data; 1..255 = data type)	
8 + n·8	U4	sTtag	-	-	sensor time tag	
<i>End of repeated group (N times)</i>						

3.11.5 UBX-ESF-STATUS (0x10 0x10)

3.11.5.1 External sensor fusion status

Message	UBX-ESF-STATUS					
	External sensor fusion status					
Type	Periodic/polled					
Comment						
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x10	0x10	16 + numSens·4	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	U1	version	-	-	Message version (0x02 for this version)	
5	U1[7]	reserved0	-	-	Reserved	

12	U1	fusionMode	-	-	<p>Fusion mode:</p> <ul style="list-style-type: none"> 0: Initialization mode: receiver is initializing some unknown values required for doing sensor fusion 1: Fusion mode: GNSS and sensor data are used for navigation solution computation 2: Suspended fusion mode: sensor fusion is temporarily disabled due to e.g. invalid sensor data or detected ferry 3: Disabled fusion mode: sensor fusion is permanently disabled until receiver reset due e.g. to sensor error <p>See the Fusion filter modes section in the integration manual for more details.</p>	
13	U1[2]	reserved1	-	-	Reserved	
15	U1	numSens	-	-	Number of sensors	
<i>Start of repeated group (numSens times)</i>						
16 + n·4	X1	sensStatus1	-	-	Sensor status, part 1	
	bits 5...0	U:6	type	-	-	Sensor data type. See section Sensor data types in the integration manual for details.
	bit 6	U:1	used	-	-	If set, sensor data is used for the current sensor fusion solution.
	bit 7	U:1	ready	-	-	If set, sensor is set up (configuration is available or not required) but not used for computing the current fusion solution.
17 + n·4	X1	sensStatus2	-	-	Sensor status, part 2	
	bits 1...0	U:2	calibStatus	-	-	<ul style="list-style-type: none"> 00: Sensor is not calibrated 01: Sensor is calibrating 10/11: Sensor is calibrated <p>Good dead reckoning performance is only possible when all used sensors are calibrated. Depending on the quality of the GNSS signals and the sensor data, the sensors may take a longer time to get calibrated.</p>
	bits 3...2	U:2	timeStatus	-	-	<ul style="list-style-type: none"> 00: No data 01: Reception of the first byte used to tag the measurement 10: Event input used to tag the measurement 11: Time tag provided with the data
18 + n·4	U1	freq	-	Hz	Observation frequency	
19 + n·4	X1	faults	-	-	Sensor faults	
	bit 0	U:1	badMeas	-	-	Bad measurements detected
	bit 1	U:1	badTTag	-	-	Bad measurement time-tags detected
	bit 2	U:1	missingMeas	-	-	Missing or time-misaligned measurements detected
	bit 3	U:1	noisyMeas	-	-	High measurement noise-level detected
<i>End of repeated group (numSens times)</i>						

3.12 UBX-INF (0x04)

Messages in the UBX-INF class are used to output strings from the firmware or application code. All messages have an associated type to indicate the nature or priority of the message.

3.12.1 UBX-INF-DEBUG (0x04 0x04)

3.12.1.1 ASCII output with debug contents

Message	UBX-INF-DEBUG					
	ASCII output with debug contents					
Type	Output					
Comment	This message has a variable length payload, representing an ASCII string.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x04	0x04	[0..n]	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
Start of repeated group (N times)						
0 + n	CH	str	-	-	ASCII Character	
End of repeated group (N times)						

3.12.2 UBX-INF-ERROR (0x04 0x00)

3.12.2.1 ASCII output with error contents

Message	UBX-INF-ERROR					
	ASCII output with error contents					
Type	Output					
Comment	This message has a variable length payload, representing an ASCII string.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x04	0x00	[0..n]	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
Start of repeated group (N times)						
0 + n	CH	str	-	-	ASCII Character	
End of repeated group (N times)						

3.12.3 UBX-INF-NOTICE (0x04 0x02)

3.12.3.1 ASCII output with informational contents

Message	UBX-INF-NOTICE					
	ASCII output with informational contents					
Type	Output					
Comment	This message has a variable length payload, representing an ASCII string.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x04	0x02	[0..n]	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
Start of repeated group (N times)						
0 + n	CH	str	-	-	ASCII Character	
End of repeated group (N times)						

3.12.4 UBX-INF-TEST (0x04 0x03)

3.12.4.1 ASCII output with test contents

Message	UBX-INF-TEST					
	ASCII output with test contents					
Type	Output					
Comment	This message has a variable length payload, representing an ASCII string.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x04	0x03	[0..n]	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
Start of repeated group (N times)						
0 + n	CH	str	-	-	ASCII Character	
End of repeated group (N times)						

3.12.5 UBX-INF-WARNING (0x04 0x01)

3.12.5.1 ASCII output with warning contents

Message	UBX-INF-WARNING					
	ASCII output with warning contents					
Type	Output					
Comment	This message has a variable length payload, representing an ASCII string.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x04	0x01	[0..n]	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
Start of repeated group (N times)						
0 + n	CH	str	-	-	ASCII Character	
End of repeated group (N times)						

3.13 UBX-MGA (0x13)

The messages in the UBX-MGA class are used for sending GNSS assistance (A-GNSS, aiding) information to the receiver as well as backing up the navigation database from the receiver to a host.

3.13.1 UBX-MGA-ACK (0x13 0x60)

3.13.1.1 Multiple GNSS acknowledge message

Message	UBX-MGA-ACK-DATA0					
	Multiple GNSS acknowledge message					
Type	Output					
Comment	This message is sent by a u-blox receiver to acknowledge the receipt of an assistance message. Acknowledgments are enabled by setting the CFG-NAVSPG-ACKAIDING item. See section Flow control in the integration manual for details.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x13	0x60	8	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	

0	U1	type	-	-	Type of acknowledgment: <ul style="list-style-type: none"> 0 = The message was not used by the receiver (see infoCode field for an indication of why) 1 = The message was accepted for use by the receiver (the infoCode field will be 0)
1	U1	version	-	-	Message version (0x00 for this version)
2	U1	infoCode	-	-	Provides greater information on what the receiver chose to do with the message contents: <ul style="list-style-type: none"> 0 = The receiver accepted the data 1 = The receiver does not know the time so it cannot use the data (To resolve this a UBX-MGA-INI-TIME_UTC message should be supplied first) 2 = The message version is not supported by the receiver 3 = The message size does not match the message version 4 = The message data could not be stored to the database 5 = The receiver is not ready to use the message data 6 = The message type is unknown
3	U1	msgId	-	-	UBX message ID of the acknowledged message
4	U1[4]	msgPayload Start	-	-	The first 4 bytes of the acknowledged message's payload

3.13.2 UBX-MGA-BDS (0x13 0x03)

3.13.2.1 BeiDou ephemeris assistance

Message	UBX-MGA-BDS-EPH BeiDou ephemeris assistance					
Type	Input					
Comment	This message allows the delivery of BeiDou ephemeris assistance to a receiver. See section AssistNow online in the integration manual for details.					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x13	0x03	88	see below	CK_A CK_B
Payload description:						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	type	-	-	Message type (0x01 for this type)	
1	U1	version	-	-	Message version (0x00 for this version)	
2	U1	svId	-	-	BeiDou satellite identifier (see Satellite Numbering)	
3	U1	reserved0	-	-	Reserved	
4	U1	SatH1	-	-	Autonomous satellite Health flag	
5	U1	IODC	-	-	Issue of Data, Clock	
6	I2	a2	2 ⁻⁶⁶	s/s ²	Time polynomial coefficient 2	
8	I4	a1	2 ⁻⁵⁰	s/s	Time polynomial coefficient 1	
12	I4	a0	2 ⁻³³	s	Time polynomial coefficient 0	
16	U4	toc	2 ³	s	Clock data reference time	
20	I2	TGD1	0.1	ns	Equipment Group Delay Differential	
22	U1	URAI	-	-	User Range Accuracy Index	

23	U1	IODE	-	-	Issue of Data, Ephemeris
24	U4	toe	2 ³	s	Ephemeris reference time
28	U4	sqrtA	2 ¹⁹	m ^{0.5}	Square root of semi-major axis
32	U4	e	2 ⁻³³	-	Eccentricity
36	I4	omega	2 ⁻³¹	semi-circles	Argument of perigee
40	I2	Deltan	2 ⁻⁴³	semi-circles/s	Mean motion difference from computed value
42	I2	IDOT	2 ⁻⁴³	semi-circles/s	Rate of inclination angle
44	I4	M0	2 ⁻³¹	semi-circles	Mean anomaly at reference time
48	I4	Omega0	2 ⁻³¹	semi-circles	Longitude of ascending node of orbital of plane computed according to reference time
52	I4	OmegaDot	2 ⁻⁴³	semi-circles/s	Rate of right ascension
56	I4	i0	2 ⁻³¹	semi-circles	Inclination angle at reference time
60	I4	Cuc	2 ⁻³¹	radians	Amplitude of cosine harmonic correction term to the argument of latitude
64	I4	Cus	2 ⁻³¹	radians	Amplitude of sine harmonic correction term to the argument of latitude
68	I4	Crc	2 ⁻⁶	m	Amplitude of cosine harmonic correction term to the orbit radius
72	I4	Crs	2 ⁻⁶	m	Amplitude of sine harmonic correction term to the orbit radius
76	I4	Cic	2 ⁻³¹	radians	Amplitude of cosine harmonic correction term to the angle of inclination
80	I4	Cis	2 ⁻³¹	radians	Amplitude of sine harmonic correction term to the angle of inclination
84	U1[4]	reserved1	-	-	Reserved

3.13.2.2 BeiDou almanac assistance

Message	UBX-MGA-BDS-ALM BeiDou almanac assistance					
<i>Type</i>	Input					
<i>Comment</i>	This message allows the delivery of BeiDou almanac assistance to a receiver. See section AssistNow online in the integration manual for details.					
<i>Message structure</i>	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x13	0x03	40	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	type	-	-	Message type (0x02 for this version)	
1	U1	version	-	-	Message version (0x00 for this version)	
2	U1	svId	-	-	BeiDou satellite identifier (see Satellite Numbering)	
3	U1	reserved0	-	-	Reserved	
4	U1	wna	-	week	Almanac Week Number	
5	U1	toa	2 ¹²	s	Almanac reference time	

6	I2	deltaI	2 ⁻¹⁹	semi-circles	Almanac correction of orbit reference inclination at reference time
8	U4	sqrtA	2 ⁻¹¹	m ^{0.5}	Almanac square root of semi-major axis
12	U4	e	2 ⁻²¹	-	Almanac eccentricity
16	I4	omega	2 ⁻²³	semi-circles	Almanac argument of perigee
20	I4	M0	2 ⁻²³	semi-circles	Almanac mean anomaly at reference time
24	I4	Omega0	2 ⁻²³	semi-circles	Almanac longitude of ascending node of orbit plane at computed according to reference time
28	I4	omegaDot	2 ⁻³⁸	semi-circles/s	Almanac rate of right ascension
32	I2	a0	2 ⁻²⁰	s	Almanac satellite clock bias
34	I2	a1	2 ⁻³⁸	s/s	Almanac satellite clock rate
36	U1[4]	reserved1	-	-	Reserved

3.13.2.3 BeiDou health assistance

Message	UBX-MGA-BDS-HEALTH BeiDou health assistance					
Type	Input					
Comment	This message allows the delivery of BeiDou health assistance to a receiver. See section AssistNow online in the integration manual for details.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x13	0x03	68	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U1	type	-	-	Message type (0x04 for this type)	
1	U1	version	-	-	Message version (0x00 for this version)	
2	U1[2]	reserved0	-	-	Reserved	
4	U2[30]	healthCode	-	-	Each two-byte value represents a BeiDou SV (1-30). The 9 LSBs of each byte contain the 9 bit health code from subframe 5 pages 7,8 of the D1 message, and from subframe 5 pages 35,36 of the D1 message.	
64	U1[4]	reserved1	-	-	Reserved	

3.13.2.4 BeiDou UTC assistance

Message	UBX-MGA-BDS-UTC BeiDou UTC assistance					
Type	Input					
Comment	This message allows the delivery of BeiDou UTC assistance to a receiver. See section AssistNow online in the integration manual for details.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x13	0x03	20	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U1	type	-	-	Message type (0x05 for this type)	
1	U1	version	-	-	Message version (0x00 for this version)	

2	U1[2]	reserved0	-	-	Reserved
4	I4	a0UTC	2 ⁻³⁰	s	BDT clock bias relative to UTC
8	I4	a1UTC	2 ⁻⁵⁰	s/s	BDT clock rate relative to UTC
12	I1	dtLS	-	s	Delta time due to leap seconds before the new leap second effective
13	U1	reserved1	-	-	Reserved
14	U1	wnRec	-	week	BeiDou week number of reception of this UTC parameter set (8-bit truncated)
15	U1	wnLSF	-	week	Week number of the new leap second
16	U1	dN	-	day	Day number of the new leap second
17	I1	dtLSF	-	s	Delta time due to leap seconds after the new leap second effective
18	U1[2]	reserved2	-	-	Reserved

3.13.2.5 BeiDou ionosphere assistance

Message	UBX-MGA-BDS-IONO BeiDou ionosphere assistance					
Type	Input					
Comment	This message allows the delivery of BeiDou ionospheric assistance to a receiver. See section AssistNow online in the integration manual for details.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x13	0x03	16	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U1	type	-	-	Message type (0x06 for this type)	
1	U1	version	-	-	Message version (0x00 for this version)	
2	U1[2]	reserved0	-	-	Reserved	
4	I1	alpha0	2 ⁻³⁰	s	Ionospheric parameter alpha0	
5	I1	alpha1	2 ⁻²⁷	s/pi	Ionospheric parameter alpha1	
6	I1	alpha2	2 ⁻²⁴	s/pi ²	Ionospheric parameter alpha2	
7	I1	alpha3	2 ⁻²⁴	s/pi ³	Ionospheric parameter alpha3	
8	I1	beta0	2 ⁻¹¹	s	Ionospheric parameter beta0	
9	I1	beta1	2 ⁻¹⁴	s/pi	Ionospheric parameter beta1	
10	I1	beta2	2 ⁻¹⁶	s/pi ²	Ionospheric parameter beta2	
11	I1	beta3	2 ⁻¹⁶	s/pi ³	Ionospheric parameter beta3	
12	U1[4]	reserved1	-	-	Reserved	

3.13.3 UBX-MGA-DBD (0x13 0x80)

3.13.3.1 Poll the navigation database

Message	UBX-MGA-DBD Poll the navigation database	
Type	Poll request	

Comment	Poll the whole navigation data base. The receiver will send all available data from its internal database. The receiver will indicate the finish of the transmission with a UBX-MGA-ACK . The msgPayloadStart field of the UBX-MGA-ACK message will contain a U4 representing the number of UBX-MGA-DBD-DATA* messages sent.						
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>		<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x13	0x80	0		see below	CK_A CK_B
Payload	This message has no payload.						

3.13.3.2 Navigation database dump entry

Message	UBX-MGA-DBD Navigation database dump entry						
Type	Input/output						
Comment	Navigation database entry. The data fields are firmware-specific. Transmission of this type of message will be acknowledged by UBX-MGA-ACK messages, if acknowledgment has been enabled. See section AssistNow online in the integration manual for details. The maximum payload size for firmware 2.01 onwards is 164 bytes (which makes the maximum message size 172 bytes). ↪ UBX-MGA-DBD messages are only intended to be sent back to the same receiver that generated them.						
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>		<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x13	0x80	12 + [0..n]		see below	CK_A CK_B
Payload description:							
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>		
0	U1[12]	reserved0	-	-	Reserved		
<i>Start of repeated group (N times)</i>							
12 + n	U1	data	-	-	firmware-specific data		
<i>End of repeated group (N times)</i>							

3.13.4 UBX-MGA-GAL (0x13 0x02)

3.13.4.1 Galileo ephemeris assistance

Message	UBX-MGA-GAL-EPH Galileo ephemeris assistance						
Type	Input						
Comment	This message allows the delivery of Galileo ephemeris assistance to a receiver. See section AssistNow online in the integration manual for details.						
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>		<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x13	0x02	76		see below	CK_A CK_B
Payload description:							
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>		
0	U1	type	-	-	Message type (0x01 for this type)		
1	U1	version	-	-	Message version (0x00 for this version)		
2	U1	svId	-	-	Galileo Satellite identifier (see Satellite Numbering)		
3	U1	reserved0	-	-	Reserved		
4	U2	iodNav	-	-	Ephemeris and clock correction Issue of Data		
6	I2	deltaN	2 ⁻⁴³	semi-circles/s	Mean motion difference from computed value		
8	I4	m0	2 ⁻³¹	semi-circles	Mean anomaly at reference time		

12	U4	e	2 ⁻³³	-	Eccentricity
16	U4	sqrtA	2 ⁻¹⁹	m ^{0.5}	Square root of the semi-major axis
20	I4	omega0	2 ⁻³¹	semi-circles	Longitude of ascending node of orbital plane at weekly epoch
24	I4	i0	2 ⁻³¹	semi-circles	Inclination angle at reference time
28	I4	omega	2 ⁻³¹	semi-circles	Argument of perigee
32	I4	omegaDot	2 ⁻⁴³	semi-circles/s	Rate of change of right ascension
36	I2	iDot	2 ⁻⁴³	semi-circles/s	Rate of change of inclination angle
38	I2	cuc	2 ⁻²⁹	radians	Amplitude of the cosine harmonic correction term to the argument of latitude
40	I2	cus	2 ⁻²⁹	radians	Amplitude of the sine harmonic correction term to the argument of latitude
42	I2	crc	2 ⁻⁵	radians	Amplitude of the cosine harmonic correction term to the orbit radius
44	I2	crs	2 ⁻⁵	radians	Amplitude of the sine harmonic correction term to the orbit radius
46	I2	cic	2 ⁻²⁹	radians	Amplitude of the cosine harmonic correction term to the angle of inclination
48	I2	cis	2 ⁻²⁹	radians	Amplitude of the sine harmonic correction term to the angle of inclination
50	U2	toe	60	s	Ephemeris reference time
52	I4	af0	2 ⁻³⁴	s	SV clock bias correction coefficient
56	I4	af1	2 ⁻⁴⁶	s/s	SV clock drift correction coefficient
60	I1	af2	2 ⁻⁵⁹	s/s squared	SV clock drift rate correction coefficient
61	U1	sisaIndexE1E5b	-	-	Signal-In-Space Accuracy index for dual frequency E1-E5b
62	U2	toc	60	s	Clock correction data reference Time of Week
64	I2	bgdE1E5b	2 ⁻³²	s	E1-E5b Broadcast Group Delay
66	U1[2]	reserved1	-	-	Reserved
68	U1	healthE1B	-	-	E1-B Signal Health Status
69	U1	dataValidityE1B	-	-	E1-B Data Validity Status
70	U1	healthE5b	-	-	E5b Signal Health Status
71	U1	dataValidityE5b	-	-	E5b Data Validity Status
72	U1[4]	reserved2	-	-	Reserved

3.13.4.2 Galileo almanac assistance

Message UBX-MGA-GAL-ALM

Galileo almanac assistance

Type Input

Comment This message allows the delivery of Galileo almanac assistance to a receiver. See section AssistNow online in the integration manual for details.

Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x13	0x02	32	see below	CK_A CK_B

Payload description:

Byte offset	Type	Name	Scale	Unit	Description
0	U1	type	-	-	Message type (0x02 for this type)
1	U1	version	-	-	Message version (0x00 for this version)
2	U1	svId	-	-	Galileo Satellite identifier (see Satellite Numbering)
3	U1	reserved0	-	-	Reserved
4	U1	ioda	-	-	Almanac Issue of Data
5	U1	almWNa	-	week	Almanac reference week number
6	U2	toa	600	s	Almanac reference time
8	I2	deltaSqrtA	2 ⁻⁹	m ^{0.5}	Difference with respect to the square root of the nominal semi-major axis (29 600 km)
10	U2	e	2 ⁻¹⁶	-	Eccentricity
12	I2	deltaI	2 ⁻¹⁴	semi-circles	Inclination at reference time relative to i0 = 56 degree
14	I2	omega0	2 ⁻¹⁵	semi-circles	Longitude of ascending node of orbital plane at weekly epoch
16	I2	omegaDot	2 ⁻³³	semi-circles/s	Rate of change of right ascension
18	I2	omega	2 ⁻¹⁵	semi-circles	Argument of perigee
20	I2	m0	2 ⁻¹⁵	semi-circles	Satellite mean anomaly at reference time
22	I2	af0	2 ⁻¹⁹	s	Satellite clock correction bias 'truncated'
24	I2	af1	2 ⁻³⁸	s/s	Satellite clock correction linear 'truncated'
26	U1	healthE1B	-	-	Satellite E1-B signal health status
27	U1	healthE5b	-	-	Satellite E5b signal health status
28	U1[4]	reserved1	-	-	Reserved

3.13.4.3 Galileo GPS time offset assistance

Message	UBX-MGA-GAL-TIMEOFFSET Galileo GPS time offset assistance
----------------	--

Type	Input
-------------	-------

Comment	This message allows the delivery of Galileo time to GPS time offset. See section AssistNow online in the integration manual for details.
----------------	---

Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x13	0x02	12	see below	CK_A CK_B

Payload description:

Byte offset	Type	Name	Scale	Unit	Description
0	U1	type	-	-	Message type (0x03 for this type)
1	U1	version	-	-	Message version (0x00 for this version)
2	U1[2]	reserved0	-	-	Reserved
4	I2	a0G	2 ⁻³⁵	s	Constant term of the polynomial describing the offset
6	I2	a1G	2 ⁻⁵¹	s/s	Rate of change of the offset
8	U1	t0G	3600	s	Reference time for GGTO data

9	U1	wn0G	-	weeks	Week Number of GGTO reference
10	U1[2]	reserved1	-	-	Reserved

3.13.4.4 Galileo UTC assistance

Message	UBX-MGA-GAL-UTC				
	Galileo UTC assistance				
Type	Input				
Comment	This message allows the delivery of Galileo UTC assistance to a receiver. See section AssistNow online in the integration manual for details.				
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>
	0xb5 0x62	0x13	0x02	20	see below
					CK_A CK_B
<i>Payload description:</i>					
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>
0	U1	type	-	-	Message type (0x05 for this type)
1	U1	version	-	-	Message version (0x00 for this version)
2	U1[2]	reserved0	-	-	Reserved
4	I4	a0	2 [^] -30	s	First parameter of UTC polynomial
8	I4	a1	2 [^] -50	s/s	Second parameter of UTC polynomial
12	I1	dtLS	-	s	Delta time due to current leap seconds
13	U1	tot	3600	s	UTC parameters reference time of week (Galileo time)
14	U1	wnt	-	weeks	UTC parameters reference week number (the 8-bit WNt field)
15	U1	wnLSF	-	weeks	Week number at the end of which the future leap second becomes effective (the 8-bit WNLSF field)
16	U1	dN	-	days	Day number at the end of which the future leap second becomes effective
17	I1	dTLSF	-	s	Delta time due to future leap seconds
18	U1[2]	reserved1	-	-	Reserved

3.13.5 UBX-MGA-GLO (0x13 0x06)

3.13.5.1 GLONASS ephemeris assistance

Message	UBX-MGA-GLO-EPH				
	GLONASS ephemeris assistance				
Type	Input				
Comment	This message allows the delivery of GLONASS ephemeris assistance to a receiver. See section AssistNow online in the integration manual for details.				
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>
	0xb5 0x62	0x13	0x06	48	see below
					CK_A CK_B
<i>Payload description:</i>					
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>
0	U1	type	-	-	Message type (0x01 for this type)
1	U1	version	-	-	Message version (0x00 for this version)
2	U1	svId	-	-	GLONASS Satellite identifier (see Satellite Numbering)
3	U1	reserved0	-	-	Reserved

4	U1	FT	-	-	User range accuracy
5	U1	B	-	-	Health flag from string 2
6	U1	M	-	-	Type of GLONASS satellite (1 indicates GLONASS-M)
7	I1	H	-	-	Carrier frequency number of navigation RF signal, Range=(-7 .. 6), -128 for unknown
8	I4	x	2 ⁻¹¹	km	X component of the SV position in PZ-90.02 coordinate System
12	I4	y	2 ⁻¹¹	km	Y component of the SV position in PZ-90.02 coordinate System
16	I4	z	2 ⁻¹¹	km	Z component of the SV position in PZ-90.02 coordinate System
20	I4	dx	2 ⁻²⁰	km/s	X component of the SV velocity in PZ-90.02 coordinate System
24	I4	dy	2 ⁻²⁰	km/s	Y component of the SV velocity in PZ-90.02 coordinate System
28	I4	dz	2 ⁻²⁰	km/s	Z component of the SV velocity in PZ-90.02 coordinate System
32	I1	ddx	2 ⁻³⁰	km/s ²	X component of the SV acceleration in PZ-90.02 coordinate System
33	I1	ddy	2 ⁻³⁰	km/s ²	Y component of the SV acceleration in PZ-90.02 coordinate System
34	I1	ddz	2 ⁻³⁰	km/s ²	Z component of the SV acceleration in PZ-90.02 coordinate System
35	U1	tb	15	minutes	Index of a time interval within current day according to UTC(SU)
36	I2	gamma	2 ⁻⁴⁰	-	Relative carrier frequency deviation
38	U1	E	-	days	Ephemeris data age indicator
39	I1	deltaTau	2 ⁻³⁰	s	Time difference between L2 and L1 band
40	I4	tau	2 ⁻³⁰	s	SV clock bias
44	U1[4]	reserved1	-	-	Reserved

3.13.5.2 GLONASS almanac assistance

Message	UBX-MGA-GLO-ALM GLONASS almanac assistance					
Type	Input					
Comment	This message allows the delivery of GLONASS almanac assistance to a receiver. See section AssistNow online in the integration manual for details.					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x13	0x06	36	<i>see below</i>	CK_A CK_B
Payload description:						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	type	-	-	Message type (0x02 for this type)	
1	U1	version	-	-	Message version (0x00 for this version)	
2	U1	svId	-	-	GLONASS Satellite identifier	(see Satellite Numbering)
3	U1	reserved0	-	-	Reserved	

4	U2	N	-	days	Reference calendar day number of almanac within the four-year period (from string 5)
6	U1	M	-	-	Type of GLONASS satellite (1 indicates GLONASS-M)
7	U1	C	-	-	Unhealthy flag at instant of almanac upload (1 indicates operability of satellite)
8	I2	tau	2 ⁻¹⁸	s	Coarse time correction to GLONASS time
10	U2	epsilon	2 ⁻²⁰	-	Eccentricity
12	I4	lambda	2 ⁻²⁰	semi-circles	Longitude of the first (within the N-day) ascending node of satellite orbit in PC-90.02 coordinate system
16	I4	deltaI	2 ⁻²⁰	semi-circles	Correction to the mean value of inclination
20	U4	tLambda	2 ⁻⁵	s	Time of the first ascending node passage
24	I4	deltaT	2 ⁻⁹	s/orbital-period	Correction to the mean value of Draconian period
28	I1	deltaDT	2 ⁻¹⁴	s/orbital-period ²	Rate of change of Draconian period
29	I1	H	-	-	Carrier frequency number of navigation RF signal, Range=(-7 .. 6)
30	I2	omega	-	-	Argument of perigee
32	U1[4]	reserved1	-	-	Reserved

3.13.5.3 GLONASS auxiliary time offset assistance

Message	UBX-MGA-GLO-TIMEOFFSET				
	GLONASS auxiliary time offset assistance				
Type	Input				
Comment	This message allows the delivery of auxiliary GLONASS assistance (including the GLONASS time offsets to other GNSS systems) to a receiver. See section AssistNow online in the integration manual for details.				
Message structure	Header	Class	ID	Length (Bytes)	Checksum
	0xb5 0x62	0x13	0x06	20	see below
Payload description:					
Byte offset	Type	Name	Scale	Unit	Description
0	U1	type	-	-	Message type (0x03 for this type)
1	U1	version	-	-	Message version (0x00 for this version)
2	U2	N	-	days	Reference calendar day number within the four-year period of almanac (from string 5)
4	I4	tauC	2 ⁻²⁷	s	Time scale correction to UTC(SU) time
8	I4	tauGps	2 ⁻³¹	s	Correction to GPS time relative to GLONASS time
12	I2	B1	2 ⁻¹⁰	s	Coefficient to determine delta UT1
14	I2	B2	2 ⁻¹⁶	s/msd	Rate of change of delta UT1
16	U1[4]	reserved0	-	-	Reserved

3.13.6 UBX-MGA-GPS (0x13 0x00)

3.13.6.1 GPS ephemeris assistance

Message		UBX-MGA-GPS-EPH				
		GPS ephemeris assistance				
<i>Type</i>	Input					
<i>Comment</i>	This message allows the delivery of GPS ephemeris assistance to a receiver. See section AssistNow online in the integration manual for details.					
<i>Message structure</i>	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x13	0x00	68	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	type	-	-	Message type (0x01 for this type)	
1	U1	version	-	-	Message version (0x00 for this version)	
2	U1	svId	-	-	GPS Satellite identifier (see Satellite Numbering)	
3	U1	reserved0	-	-	Reserved	
4	U1	fitInterval	-	-	Fit interval flag	
5	U1	uraIndex	-	-	URA index	
6	U1	svHealth	-	-	SV health	
7	I1	tgd	2 ⁻³¹	s	Group delay differential	
8	U2	iodc	-	-	IODC	
10	U2	toc	2 ⁴	s	Clock data reference time	
12	U1	reserved1	-	-	Reserved	
13	I1	af2	2 ⁻⁵⁵	s/s squared	Time polynomial coefficient 2	
14	I2	af1	2 ⁻⁴³	s/s	Time polynomial coefficient 1	
16	I4	af0	2 ⁻³¹	s	Time polynomial coefficient 0	
20	I2	crs	2 ⁻⁵	m	Crs	
22	I2	deltaN	2 ⁻⁴³	semi-circles/s	Mean motion difference from computed value	
24	I4	m0	2 ⁻³¹	semi-circles	Mean anomaly at reference time	
28	I2	cuc	2 ⁻²⁹	radians	Amplitude of cosine harmonic correction term to argument of latitude	
30	I2	cus	2 ⁻²⁹	radians	Amplitude of sine harmonic correction term to argument of latitude	
32	U4	e	2 ⁻³³	-	Eccentricity	
36	U4	sqrtA	2 ⁻¹⁹	m ^{0.5}	Square root of the semi-major axis	
40	U2	toe	2 ⁴	s	Reference time of ephemeris	
42	I2	cic	2 ⁻²⁹	radians	Amplitude of cos harmonic correction term to angle of inclination	
44	I4	omega0	2 ⁻³¹	semi-circles	Longitude of ascending node of orbit plane at weekly epoch	
48	I2	cis	2 ⁻²⁹	radians	Amplitude of sine harmonic correction term to angle of inclination	
50	I2	crc	2 ⁻⁵	m	Amplitude of cosine harmonic correction term to orbit radius	

52	I4	i0	2 ⁻³¹	semi-circles	Inclination angle at reference time
56	I4	omega	2 ⁻³¹	semi-circles	Argument of perigee
60	I4	omegaDot	2 ⁻⁴³	semi-circles/s	Rate of right ascension
64	I2	idot	2 ⁻⁴³	semi-circles/s	Rate of inclination angle
66	U1[2]	reserved2	-	-	Reserved

3.13.6.2 GPS almanac assistance

Message **UBX-MGA-GPS-ALM**
GPS almanac assistance

Type Input

Comment This message allows the delivery of GPS almanac assistance to a receiver.
See section AssistNow online in the integration manual for details.

<i>Message structure</i>	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x13	0x00	36	see below	CK_A CK_B

Payload description:

<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>
0	U1	type	-	-	Message type (0x02 for this type)
1	U1	version	-	-	Message version (0x00 for this version)
2	U1	svId	-	-	GPS Satellite identifier (see Satellite Numbering)
3	U1	svHealth	-	-	SV health information
4	U2	e	2 ⁻²¹	-	Eccentricity
6	U1	almWNa	-	week	Reference week number of almanac (the 8-bit WNa field)
7	U1	toa	2 ⁻¹²	s	Reference time of almanac
8	I2	deltaI	2 ⁻¹⁹	semi-circles	Delta inclination angle at reference time
10	I2	omegaDot	2 ⁻³⁸	semi-circles/s	Rate of right ascension
12	U4	sqrtA	2 ⁻¹¹	m ^{0.5}	Square root of the semi-major axis
16	I4	omega0	2 ⁻²³	semi-circles	Longitude of ascending node of orbit plane
20	I4	omega	2 ⁻²³	semi-circles	Argument of perigee
24	I4	m0	2 ⁻²³	semi-circles	Mean anomaly at reference time
28	I2	af0	2 ⁻²⁰	s	Time polynomial coefficient 0 (8 MSBs)
30	I2	af1	2 ⁻³⁸	s/s	Time polynomial coefficient 1
32	U1[4]	reserved0	-	-	Reserved

3.13.6.3 GPS health assistance

Message **UBX-MGA-GPS-HEALTH**
GPS health assistance

Type Input

Comment This message allows the delivery of GPS health assistance to a receiver.

See section AssistNow online in the integration manual for details.

Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x13	0x00	40	see below	CK_A CK_B

Payload description:

Byte offset	Type	Name	Scale	Unit	Description
0	U1	type	-	-	Message type (0x04 for this type)
1	U1	version	-	-	Message version (0x00 for this version)
2	U1[2]	reserved0	-	-	Reserved
4	U1[32]	healthCode	-	-	Each byte represents a GPS SV (1-32). The 6 LSBs of each byte contains the 6 bit health code from subframes 4/5 page 25.
36	U1[4]	reserved1	-	-	Reserved

3.13.6.4 GPS UTC assistance

Message	UBX-MGA-GPS-UTC GPS UTC assistance
---------	---------------------------------------

Type	Input
------	-------

Comment	This message allows the delivery of GPS UTC assistance to a receiver. See section AssistNow online in the integration manual for details.
---------	--

Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x13	0x00	20	see below	CK_A CK_B

Payload description:

Byte offset	Type	Name	Scale	Unit	Description
0	U1	type	-	-	Message type (0x05 for this type)
1	U1	version	-	-	Message version (0x00 for this version)
2	U1[2]	reserved0	-	-	Reserved
4	I4	utcA0	2 ⁻³⁰	s	First parameter of UTC polynomial
8	I4	utcA1	2 ⁻⁵⁰	s/s	Second parameter of UTC polynomial
12	I1	utcDtLS	-	s	Delta time due to current leap seconds
13	U1	utcTot	2 ¹²	s	UTC parameters reference time of week (GPS time)
14	U1	utcWNt	-	weeks	UTC parameters reference week number (the 8-bit WNt field)
15	U1	utcWNlsf	-	weeks	Week number at the end of which the future leap second becomes effective (the 8-bit WNLSF field)
16	U1	utcDn	-	days	Day number at the end of which the future leap second becomes effective
17	I1	utcDtLSF	-	s	Delta time due to future leap seconds
18	U1[2]	reserved1	-	-	Reserved

3.13.6.5 GPS ionosphere assistance

Message	UBX-MGA-GPS-IONO GPS ionosphere assistance
---------	---

Type	Input
------	-------

Comment	This message allows the delivery of GPS ionospheric assistance to a receiver. See section AssistNow online in the integration manual for details.
---------	--

Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x13	0x00	16	see below	CK_A CK_B

Payload description:

Byte offset	Type	Name	Scale	Unit	Description
0	U1	type	-	-	Message type (0x06 for this type)
1	U1	version	-	-	Message version (0x00 for this version)
2	U1[2]	reserved0	-	-	Reserved
4	I1	ionoAlpha0	2 ⁻³⁰	s	Ionospheric parameter alpha0 [s]
5	I1	ionoAlpha1	2 ⁻²⁷	s/semi-circle	Ionospheric parameter alpha1 [s/semi-circle]
6	I1	ionoAlpha2	2 ⁻²⁴	s/(semi-circle ²)	Ionospheric parameter alpha2 [s/semi-circle ²]
7	I1	ionoAlpha3	2 ⁻²⁴	s/(semi-circle ³)	Ionospheric parameter alpha3 [s/semi-circle ³]
8	I1	ionoBeta0	2 ¹¹	s	Ionospheric parameter beta0 [s]
9	I1	ionoBeta1	2 ¹⁴	s/semi-circle	Ionospheric parameter beta1 [s/semi-circle]
10	I1	ionoBeta2	2 ¹⁶	s/(semi-circle ²)	Ionospheric parameter beta2 [s/semi-circle ²]
11	I1	ionoBeta3	2 ¹⁶	s/(semi-circle ³)	Ionospheric parameter beta3 [s/semi-circle ³]
12	U1[4]	reserved1	-	-	Reserved

3.13.7 UBX-MGA-INI (0x13 0x40)

3.13.7.1 Initial position assistance

Message	UBX-MGA-INI-POS_XYZ Initial position assistance					
Type	Input					
Comment	<p>This message allows the delivery of initial position assistance to a receiver in cartesian ECEF coordinates. This message is equivalent to the UBX-MGA-INI-POS_LLH message, except for the coordinate system. See section AssistNow Online in the integration manual for details.</p> <p>↪ Supplying position assistance that is inaccurate by more than the specified position accuracy, may lead to substantially degraded receiver performance.</p>					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x13	0x40	20	see below	CK_A CK_B

Payload description:

Byte offset	Type	Name	Scale	Unit	Description
0	U1	type	-	-	Message type (0x00 for this type)
1	U1	version	-	-	Message version (0x00 for this version)
2	U1[2]	reserved0	-	-	Reserved
4	I4	ecefX	-	cm	WGS84 ECEF X coordinate
8	I4	ecefY	-	cm	WGS84 ECEF Y coordinate
12	I4	ecefZ	-	cm	WGS84 ECEF Z coordinate
16	U4	posAcc	-	cm	Position accuracy (stddev)

3.13.7.2 Initial position assistance

Message	UBX-MGA-INI-POS_LLH Initial position assistance					
Type	Input					
Comment	<p>This message allows the delivery of initial position assistance to a receiver in WGS84 lat/long/alt coordinates. This message is equivalent to the UBX-MGA-INI-POS_XYZ message, except for the coordinate system. See section AssistNow online in the integration manual for details.</p> <p>☞ Supplying position assistance that is inaccurate by more than the specified position accuracy, may lead to substantially degraded receiver performance.</p>					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x13	0x40	20	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	type	-	-	Message type (0x01 for this type)	
1	U1	version	-	-	Message version (0x00 for this version)	
2	U1[2]	reserved0	-	-	Reserved	
4	I4	lat	1e-7	deg	WGS84 Latitude	
8	I4	lon	1e-7	deg	WGS84 Longitude	
12	I4	alt	-	cm	WGS84 Altitude	
16	U4	posAcc	-	cm	Position accuracy (stddev)	

3.13.7.3 Initial time assistance

Message	UBX-MGA-INI-TIME.UTC Initial time assistance					
Type	Input					
Comment	<p>This message allows the delivery of UTC time assistance to a receiver. This message is equivalent to the UBX-MGA-INI-TIME_GNSS message, except for the time base. See section AssistNow online in the integration manual for details.</p> <p>☞ Supplying time assistance that is inaccurate by more than the specified time accuracy, may lead to substantially degraded receiver performance.</p>					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x13	0x40	24	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	type	-	-	Message type (0x10 for this type)	
1	U1	version	-	-	Message version (0x00 for this version)	
2	X1	ref	-	-	Reference to be used to set time	
bits 3...0	U:4	source	-	-	<ul style="list-style-type: none"> 0 = none, i.e. on receipt of message (will be inaccurate!) 1 = relative to pulse sent to EXTINT0 2 = relative to pulse sent to EXTINT1 3-15 = reserved 	
bit 4	U:1	fall	-	-	use falling edge of EXTINT pulse (default rising) - only if source is EXTINT	
bit 5	U:1	last	-	-	use last EXTINT pulse (default next pulse) - only if source is EXTINT	
3	I1	leapSecs	-	s	Number of leap seconds since 1980 (or 0x80 = -128 if unknown)	

4	U2	year	-	-	Year
6	U1	month	-	-	Month, starting at 1
7	U1	day	-	-	Day, starting at 1
8	U1	hour	-	-	Hour, from 0 to 23
9	U1	minute	-	-	Minute, from 0 to 59
10	U1	second	-	s	Seconds, from 0 to 59
11	U1	reserved0	-	-	Reserved
12	U4	ns	-	ns	Nanoseconds, from 0 to 999,999,999
16	U2	tAccS	-	s	Seconds part of time accuracy
18	U1[2]	reserved1	-	-	Reserved
20	U4	tAccNs	-	ns	Nanoseconds part of time accuracy, from 0 to 999,999,999

3.13.7.4 Initial time assistance

Message **UBX-MGA-INI-TIME_GNSS**
Initial time assistance

Type Input

Comment This message allows the delivery of time assistance to a receiver in a chosen GNSS timebase. This message is equivalent to the [UBX-MGA-INI-TIME_UTC](#) message, except for the time base.

See section AssistNow online in the integration manual for details.

☞ Supplying time assistance that is inaccurate by more than the specified time accuracy, may lead to substantially degraded receiver performance.

Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x13	0x40	24	see below	CK_A CK_B

Payload description:

Byte offset	Type	Name	Scale	Unit	Description
0	U1	type	-	-	Message type (0x11 for this type)
1	U1	version	-	-	Message version (0x00 for this version)
2	X1	ref	-	-	Reference to be used to set time
bits 3...0	U:4	source	-	-	<ul style="list-style-type: none"> 0 = none, i.e. on receipt of message (will be inaccurate!) 1 = relative to pulse sent to EXTINT0 2 = relative to pulse sent to EXTINT1 3-15 = reserved
bit 4	U:1	fall	-	-	use falling edge of EXTINT pulse (default rising) - only if source is EXTINT
bit 5	U:1	last	-	-	use last EXTINT pulse (default next pulse) - only if source is EXTINT
3	U1	gnssId	-	-	Source of time information. Currently supported: <ul style="list-style-type: none"> 0 = GPS time 2 = Galileo time 3 = BeiDou time 6 = GLONASS time: week = 834 + ((N4-1)*1461 + Nt)/7, tow = (((N4-1)*1461 + Nt) % 7) * 86400 + tod
4	U1[2]	reserved0	-	-	Reserved
6	U2	week	-	-	GNSS week number
8	U4	tow	-	s	GNSS time of week

12	U4	ns	-	ns	GNSS time of week, nanosecond part from 0 to 999,999,999
16	U2	tAccS	-	s	Seconds part of time accuracy
18	U1[2]	reserved1	-	-	Reserved
20	U4	tAccNs	-	ns	Nanoseconds part of time accuracy, from 0 to 999,999,999

3.13.7.5 Initial clock drift assistance

Message UBX-MGA-INI-CLKD

Initial clock drift assistance

Type Input

Comment This message allows the delivery of clock drift assistance to a receiver.

See section AssistNow online in the integration manual for details.

☞ Supplying clock drift assistance that is inaccurate by more than the specified accuracy, may lead to substantially degraded receiver performance.

Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x13	0x40	12	see below	CK_A CK_B

Payload description:

Byte offset	Type	Name	Scale	Unit	Description
0	U1	type	-	-	Message type (0x20 for this type)
1	U1	version	-	-	Message version (0x00 for this version)
2	U1[2]	reserved0	-	-	Reserved
4	I4	clkD	-	ns/s	Clock drift
8	U4	clkDAcc	-	ns/s	Clock drift accuracy

3.13.7.6 Initial frequency assistance

Message UBX-MGA-INI-FREQ

Initial frequency assistance

Type Input

Comment This message allows the delivery of external frequency assistance to a receiver.

See section AssistNow online in the integration manual for details.

☞ Supplying external frequency assistance that is inaccurate by more than the specified accuracy, may lead to substantially degraded receiver performance.

Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x13	0x40	12	see below	CK_A CK_B

Payload description:

Byte offset	Type	Name	Scale	Unit	Description
0	U1	type	-	-	Message type (0x21 for this type)
1	U1	version	-	-	Message version (0x00 for this version)
2	U1	reserved0	-	-	Reserved
3	X1	flags	-	-	Frequency reference
	bits 3...0 U:4	source	-	-	<ul style="list-style-type: none"> 0 = frequency available on EXTINT0 1 = frequency available on EXTINT1 2-15 = reserved
	bit 4 U:1	fall	-	-	use falling edge of EXTINT pulse (default rising)
4	I4	freq	1e-2	Hz	Frequency

8	U4	freqAcc	-	ppb	Frequency accuracy
---	----	---------	---	-----	--------------------

3.13.8 UBX-MGA-QZSS (0x13 0x05)

3.13.8.1 QZSS ephemeris assistance

Message	UBX-MGA-QZSS-EPH					
	QZSS ephemeris assistance					
Type	Input					
Comment	This message allows the delivery of QZSS ephemeris assistance to a receiver. See section AssistNow Online in the integration manual for details.					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x13	0x05	68	see below	CK_A CK_B
Payload description:						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	type	-	-	Message type (0x01 for this type)	
1	U1	version	-	-	Message version (0x00 for this version)	
2	U1	svId	-	-	QZSS Satellite identifier (see Satellite Numbering), Range 1-5	
3	U1	reserved0	-	-	Reserved	
4	U1	fitInterval	-	-	Fit interval flag	
5	U1	uraIndex	-	-	URA index	
6	U1	svHealth	-	-	SV health	
7	I1	tgdc	2 ⁻³¹	s	Group delay differential	
8	U2	iodc	-	-	IODC	
10	U2	toc	2 ⁴	s	Clock data reference time	
12	U1	reserved1	-	-	Reserved	
13	I1	af2	2 ⁻⁵⁵	s/s squared	Time polynomial coefficient 2	
14	I2	af1	2 ⁻⁴³	s/s	Time polynomial coefficient 1	
16	I4	af0	2 ⁻³¹	s	Time polynomial coefficient 0	
20	I2	crs	2 ⁻⁵	m	Crs	
22	I2	deltaN	2 ⁻⁴³	semi-circles/s	Mean motion difference from computed value	
24	I4	m0	2 ⁻³¹	semi-circles	Mean anomaly at reference time	
28	I2	cuc	2 ⁻²⁹	radians	Amp of cosine harmonic corr term to arg of lat	
30	I2	cus	2 ⁻²⁹	radians	Amp of sine harmonic corr term to arg of lat	
32	U4	e	2 ⁻³³	-	eccentricity	
36	U4	sqrtA	2 ⁻¹⁹	m ^{0.5}	Square root of the semi-major axis A	
40	U2	toe	2 ⁴	s	Reference time of ephemeris	
42	I2	cic	2 ⁻²⁹	radians	Amp of cos harmonic corr term to angle of inclination	
44	I4	omega0	2 ⁻³¹	semi-circles	Long of asc node of orbit plane at weekly epoch	
48	I2	cis	2 ⁻²⁹	radians	Amp of sine harmonic corr term to angle of inclination	
50	I2	crc	2 ⁻⁵	m	Amp of cosine harmonic corr term to orbit radius	

52	I4	i0	2 ⁻³¹	semi-circles	Inclination angle at reference time
56	I4	omega	2 ⁻³¹	semi-circles	Argument of perigee
60	I4	omegaDot	2 ⁻⁴³	semi-circles/s	Rate of right ascension
64	I2	idot	2 ⁻⁴³	semi-circles/s	Rate of inclination angle
66	U1[2]	reserved2	-	-	Reserved

3.13.8.2 QZSS almanac assistance

Message	UBX-MGA-QZSS-ALM QZSS almanac assistance					
Type	Input					
Comment	This message allows the delivery of QZSS almanac assistance to a receiver. See section AssistNow Online in the integration manual for details.					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x13	0x05	36	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	type	-	-	Message type (0x02 for this type)	
1	U1	version	-	-	Message version (0x00 for this version)	
2	U1	svId	-	-	QZSS Satellite identifier (see Satellite Numbering), Range 1-5	
3	U1	svHealth	-	-	Almanac SV health information	
4	U2	e	2 ⁻²¹	-	Almanac eccentricity	
6	U1	almWNa	-	week	Reference week number of almanac (the 8-bit WNa field)	
7	U1	toa	2 ¹²	s	Reference time of almanac	
8	I2	deltaI	2 ⁻¹⁹	semi-circles	Delta inclination angle at reference time	
10	I2	omegaDot	2 ⁻³⁸	semi-circles/s	Almanac rate of right ascension	
12	U4	sqrtA	2 ⁻¹¹	m ^{0.5}	Almanac square root of the semi-major axis A	
16	I4	omega0	2 ⁻²³	semi-circles	Almanac long of asc node of orbit plane at weekly	
20	I4	omega	2 ⁻²³	semi-circles	Almanac argument of perigee	
24	I4	m0	2 ⁻²³	semi-circles	Almanac mean anomaly at reference time	
28	I2	af0	2 ⁻²⁰	s	Almanac time polynomial coefficient 0 (8 MSBs)	
30	I2	af1	2 ⁻³⁸	s/s	Almanac time polynomial coefficient 1	
32	U1[4]	reserved0	-	-	Reserved	

3.13.8.3 QZSS health assistance

Message	UBX-MGA-QZSS-HEALTH QZSS health assistance					
Type	Input					

Comment	This message allows the delivery of QZSS health assistance to a receiver. See section AssistNow Online in the integration manual for details.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x13	0x05	12	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U1	type	-	-	Message type (0x04 for this type)	
1	U1	version	-	-	Message version (0x00 for this version)	
2	U1[2]	reserved0	-	-	Reserved	
4	U1[5]	healthCode	-	-	Each byte represents a QZSS SV (1-5). The 6 LSBs of each byte contains the 6 bit health code from subframes 4/5, data ID = 3, SV ID = 51	
9	U1[3]	reserved1	-	-	Reserved	

3.14 UBX-MON (0x0a)

The messages in the UBX-MON class are used to report the receiver status, such as hardware status or I/O subsystem statistics.

3.14.1 UBX-MON-COMMS (0x0a 0x36)

3.14.1.1 Communication port information

Message	UBX-MON-COMMS Communication port information					
Type	Periodic/pollled					
Comment	Consolidated communications information for all ports. The size of the message is determined by the number of ports that are in use on the receiver. A port is only included if communication, either send or receive, has been initiated on that port.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x0a	0x36	8 + nPorts·40	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U1	version	-	-	Message version (0x00 for this version)	
1	U1	nPorts	-	-	Number of ports included	
2	X1	txErrors	-	-	TX error bitmask	
bit 0	U:1	mem	-	-	Memory Allocation error	
bit 1	U:1	alloc	-	-	Allocation error (TX buffer full)	
3	U1	reserved0	-	-	Reserved	
4	U1[4]	protIds	-	-	The identifiers of the protocols reported in the msggs array. 0: UBX, 1: NMEA, 2: RTCM2, 5: RTCM3, 6: SPARTN, 0xFF: No protocol reported.	
Start of repeated group (nPorts times)						
8 + n·40	U2	portId	-	-	Unique identifier for the port. See section Communications ports in the integration manual for details.	
10 + n·40	U2	txPending	-	bytes	Number of bytes pending in transmitter buffer	
12 + n·40	U4	txBytes	-	bytes	Number of bytes ever sent	

16 + n·40	U1	txUsage	-	%	Maximum usage transmitter buffer during the last sysmon period
17 + n·40	U1	txPeakUsage	-	%	Maximum usage transmitter buffer
18 + n·40	U2	rxPending	-	bytes	Number of bytes in receiver buffer
20 + n·40	U4	rxBytes	-	bytes	Number of bytes ever received
24 + n·40	U1	rxUsage	-	%	Maximum usage receiver buffer during the last sysmon period
25 + n·40	U1	rxPeakUsage	-	%	Maximum usage receiver buffer
26 + n·40	U2	overrunErrs	-	-	Number of 100 ms timeslots with overrun errors
28 + n·40	U2[4]	msgs	-	msg	Number of successfully parsed messages for each protocol. The reported protocols are identified through the protIds field.
36 + n·40	U1[8]	reserved1	-	-	Reserved
44 + n·40	U4	skipped	-	bytes	Number of skipped bytes

End of repeated group (nPorts times)

3.14.2 UBX-MON-GNSS (0x0a 0x28)

3.14.2.1 Information message major GNSS selection

Message		UBX-MON-GNSS				
		Information message major GNSS selection				
<i>Type</i>	Polled					
<i>Comment</i>	This message reports major GNSS selection. It does this by means of bit masks in U1 fields. Each bit in a bit mask corresponds to one major GNSS. Augmentation systems are not reported.					
<i>Message structure</i>	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x0a	0x28	8	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	version	-	-	Message version (0x00 for this version)	
1	X1	supported	-	-	A bit mask showing the major GNSS that can be supported by this receiver	
bit 0	U:1	GPSSup	-	-	GPS is supported	
bit 1	U:1	GlonassSup	-	-	GLONASS is supported	
bit 2	U:1	BeidouSup	-	-	BeiDou is supported	
bit 3	U:1	GalileoSup	-	-	Galileo is supported	
2	X1	defaultGnss	-	-	A bit mask showing the default major GNSS selection. If the default major GNSS selection is currently configured in the efuse for this receiver, it takes precedence over the default major GNSS selection configured in the executing firmware of this receiver.	
bit 0	U:1	GPSDef	-	-	GPS is default-enabled	
bit 1	U:1	GlonassDef	-	-	GLONASS is default-enabled	
bit 2	U:1	BeidouDef	-	-	BeiDou is default-enabled	
bit 3	U:1	GalileoDef	-	-	Galileo is default-enabled	
3	X1	enabled	-	-	A bit mask showing the current major GNSS selection enabled for this receiver	

bit 0	U:1	GPSEna	-	-	GPS is enabled
bit 1	U:1	GlonassEna	-	-	GLONASS is enabled
bit 2	U:1	BeidouEna	-	-	BeiDou is enabled
bit 3	U:1	GalileoEna	-	-	Galileo is enabled
4	U1	simultaneous	-	-	Maximum number of concurrent major GNSS that can be supported by this receiver
5	U1[3]	reserved0	-	-	Reserved

3.14.3 UBX-MON-HW (0x0a 0x09)

3.14.3.1 Hardware status

Message	UBX-MON-HW					
	Hardware status					
Type	Periodic/pollled					
Comment	<p>This message is deprecated in this protocol version. Use UBX-MON-HW3 and UBX-MON-RF instead.</p> <p>Status of different aspects of the hardware, such as antenna, PIO/peripheral pins, noise level, automatic gain control (AGC)</p>					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x0a	0x09	60	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	X4	pinSel	-	-	Mask of pins set as peripheral/PIO	
4	X4	pinBank	-	-	Mask of pins set as bank A/B	
8	X4	pinDir	-	-	Mask of pins set as input/output	
12	X4	pinVal	-	-	Mask of pins value low/high	
16	U2	noisePerMS	-	-	Noise level as measured by the GPS core	
18	U2	agcCnt	-	-	AGC monitor (counts SIGHI xor SIGLO, range 0 to 8191)	
20	U1	aStatus	-	-	Status of the antenna supervisor state machine (0=INIT, 1=DONTKNOW, 2=OK, 3=SHORT, 4=OPEN)	
21	U1	aPower	-	-	Current power status of antenna (0=OFF, 1=ON, 2=DONTKNOW)	
22	X1	flags	-	-	Flags	
bit 0	U:1	rtcCalib	-	-	RTC is calibrated	
bit 1	U:1	safeBoot	-	-	Safeboot mode (0 = inactive, 1 = active)	
bits 3...2	U:2	jammingState	-	-	Output from jamming/interference monitor (0 = unknown or feature disabled, 1 = ok - no significant jamming, 2 = warning - interference visible but fix OK, 3 = critical - interference visible and no fix)	
bit 4	U:1	xtalAbsent	-	-	RTC xtal has been determined to be absent (not supported for protocol versions less than 18.00)	
23	U1	reserved0	-	-	Reserved	
24	X4	usedMask	-	-	Mask of pins that are used by the virtual pin manager	
28	U1[17]	VP	-	-	Array of pin mappings for each of the 17 physical pins	
45	U1	jamInd	-	-	CW jamming indicator, scaled (0 = no CW jamming, 255 = strong CW jamming)	

46	U1[2]	reserved1	-	-	Reserved
48	X4	pinIrq	-	-	Mask of pins value using the PIO Irq
52	X4	pullH	-	-	Mask of pins value using the PIO pull high resistor
56	X4	pullL	-	-	Mask of pins value using the PIO pull low resistor

3.14.4 UBX-MON-HW2 (0x0a 0x0b)

3.14.4.1 Extended hardware status

Message	UBX-MON-HW2					
	Extended hardware status					
<i>Type</i>	Periodic/pollled					
<i>Comment</i>	<p>This message is deprecated in this protocol version. Use UBX-MON-HW3 and UBX-MON-RF instead.</p> <p>Status of different aspects of the hardware such as Imbalance, Low-Level Configuration and POST Results. The first four parameters of this message represent the complex signal from the RF front end. The following rules of thumb apply:</p> <ul style="list-style-type: none"> The smaller the absolute value of the variable <code>ofsI</code> and <code>ofsQ</code>, the better. Ideally, the magnitude of the I-part (<code>magI</code>) and the Q-part (<code>magQ</code>) of the complex signal should be the same. 					
<i>Message structure</i>	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x0a	0x0b	28	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	I1	<code>ofsI</code>	-	-	Imbalance of I-part of complex signal, scaled (-128 = max. negative imbalance, 127 = max. positive imbalance)	
1	U1	<code>magI</code>	-	-	Magnitude of I-part of complex signal, scaled (0 = no signal, 255 = max. magnitude)	
2	I1	<code>ofsQ</code>	-	-	Imbalance of Q-part of complex signal, scaled (-128 = max. negative imbalance, 127 = max. positive imbalance)	
3	U1	<code>magQ</code>	-	-	Magnitude of Q-part of complex signal, scaled (0 = no signal, 255 = max. magnitude)	
4	U1	<code>cfgSource</code>	-	-	Source of low-level configuration (114 = ROM, 111 = OTP, 112 = config pins, 102 = flash image)	
5	U1[3]	reserved0	-	-	Reserved	
8	U4	<code>lowLevCfg</code>	-	-	Low-level configuration (obsolete for protocol versions greater than 15.00)	
12	U1[8]	reserved1	-	-	Reserved	
20	U4	<code>postStatus</code>	-	-	POST status word	
24	U1[4]	reserved2	-	-	Reserved	

3.14.5 UBX-MON-HW3 (0x0a 0x37)

3.14.5.1 I/O pin status

Message	UBX-MON-HW3					
	I/O pin status					
<i>Type</i>	Periodic/pollled					

Comment This message contains information specific to each HW I/O pin, for example whether the pin is set as Input or Output.

For the antenna supervisor status and other RF status information, see the [UBX-MON-RF](#) message.

Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x0a	0x37	22 + nPins*6	see below	CK_A CK_B

Payload description:

Byte offset	Type	Name	Scale	Unit	Description
0	U1	version	-	-	Message version (0x00 for this version)
1	U1	nPins	-	-	The number of I/O pins included
2	X1	flags	-	-	Flags
bit 0	U:1	rtcCalib	-	-	RTC is calibrated
bit 1	U:1	safeBoot	-	-	Safeboot mode (0 = inactive, 1 = active)
bit 2	U:1	xtalAbsent	-	-	RTC xtal has been determined to be absent
3	CH[10]	hwVersion	-	-	Zero-terminated hardware version string (same as that returned in the UBX-MON-VER message)
13	U1[9]	reserved0	-	-	Reserved

Start of repeated group (nPins times)

22 + n*6	U2	pinId	-	-	Identifier for the pin, including both external and internal pins.
24 + n*6	X2	pinMask	-	-	Pin mask
bit 0	U:1	periphPIO	-	-	Pin is set to peripheral or PIO? 0=Peripheral 1=PIO
bits 3...1	U:3	pinBank	-	-	Bank the pin belongs to, where 0=A 1=B 2=C 3=D 4=E 5=F 6=G 7=H
bit 4	U:1	direction	-	-	Pin direction? 0=Input 1=Output
bit 5	U:1	value	-	-	Pin value? 0=Low 1=High
bit 6	U:1	vpManager	-	-	Used by virtual pin manager? 0=No 1=Yes
bit 7	U:1	pioIrq	-	-	Interrupt enabled? 0=No 1=Yes
bit 8	U:1	pioPullHigh	-	-	Using pull high resistor? 0=No 1=Yes
bit 9	U:1	pioPullLow	-	-	Using pull low resistor 0=No 1=Yes
26 + n*6	U1	VP	-	-	Virtual pin mapping
27 + n*6	U1	reserved1	-	-	Reserved

End of repeated group (nPins times)

3.14.6 UBX-MON-IO (0x0a 0x02)

3.14.6.1 I/O system status

Message	UBX-MON-IO I/O system status					
Type	Periodic/pollled					
Comment	This message is deprecated in this protocol version. Use UBX-MON-COMMS instead. The size of the message is determined by the number of ports 'N' the receiver supports, i.e. on u-blox 5 the number of ports is 6.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x0a	0x02	[0..n]:20	see below	CK_A CK_B

Payload description:

Byte offset	Type	Name	Scale	Unit	Description
<i>Start of repeated group (N times)</i>					
0 + n·20	U4	rxBytes	-	bytes	Number of bytes ever received
4 + n·20	U4	txBytes	-	bytes	Number of bytes ever sent
8 + n·20	U2	parityErrs	-	-	Number of 100 ms timeslots with parity errors
10 + n·20	U2	framingErrs	-	-	Number of 100 ms timeslots with framing errors
12 + n·20	U2	overrunErrs	-	-	Number of 100 ms timeslots with overrun errors
14 + n·20	U2	breakCond	-	-	Number of 100 ms timeslots with break conditions
16 + n·20	U1[4]	reserved0	-	-	Reserved
<i>End of repeated group (N times)</i>					

3.14.7 UBX-MON-MSGPP (0x0a 0x06)

3.14.7.1 Message parse and process status

Message	UBX-MON-MSGPP Message parse and process status					
Type	Periodic/pollled					
Comment	This message is deprecated in this protocol version. Use UBX-MON-COMMS instead.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x0a	0x06	120	see below	CK_A CK_B
<i>Payload description:</i>						
Byte offset	Type	Name	Scale	Unit	Description	
0	U2[8]	msg1	-	msgs	Number of successfully parsed messages for each protocol on port0	
16	U2[8]	msg2	-	msgs	Number of successfully parsed messages for each protocol on port1	
32	U2[8]	msg3	-	msgs	Number of successfully parsed messages for each protocol on port2	
48	U2[8]	msg4	-	msgs	Number of successfully parsed messages for each protocol on port3	
64	U2[8]	msg5	-	msgs	Number of successfully parsed messages for each protocol on port4	
80	U2[8]	msg6	-	msgs	Number of successfully parsed messages for each protocol on port5	
96	U4[6]	skipped	-	bytes	Number skipped bytes for each port	

3.14.8 UBX-MON-PATCH (0x0a 0x27)

3.14.8.1 Installed patches

Message	UBX-MON-PATCH Installed patches					
Type	Polled					
Comment	This message reports information about patches installed and currently enabled on the receiver. It does not report on patches installed and then disabled. An enabled patch is considered active when the receiver executes from the code space where the patch resides on. For example, a ROM patch is reported active only when the system runs from ROM.					

Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x0a	0x27	4 + nEntries·16	see below	CK_A CK_B
<i>Payload description:</i>						
Byte offset	Type	Name	Scale	Unit	Description	
0	U2	version	-	-	Message version (0x0001 for this version)	
2	U2	nEntries	-	-	Total number of reported patches	
<i>Start of repeated group (nEntries times)</i>						
4 + n·16	X4	patchInfo	-	-	Status information about the reported patch	
bit 0	U:1	activated	-	-	1: the patch is active, 0: otherwise	
bits 2...1	U:2	location	-	-	Indicates where the patch is stored. 0: eFuse, 1: ROM, 2: BBR, 3: file system	
8 + n·16	U4	comparator Number	-	-	The number of the comparator	
12 + n·16	U4	patchAddress	-	-	The address that is targeted by the patch	
16 + n·16	U4	patchData	-	-	The data that is inserted at the patchAddress	
<i>End of repeated group (nEntries times)</i>						

3.14.9 UBX-MON-RF (0x0a 0x38)

3.14.9.1 RF information

Message	UBX-MON-RF RF information					
Type	Periodic/pollled					
Comment	Information for each RF block. There are as many RF blocks reported as bands supported by this receiver.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x0a	0x38	4 + nBlocks·24	see below	CK_A CK_B
<i>Payload description:</i>						
Byte offset	Type	Name	Scale	Unit	Description	
0	U1	version	-	-	Message version (0x00 for this version)	
1	U1	nBlocks	-	-	The number of RF blocks included	
2	U1[2]	reserved0	-	-	Reserved	
<i>Start of repeated group (nBlocks times)</i>						
4 + n·24	U1	blockId	-	-	RF block ID (0 = L1 band, 1 = L2 or L5 band depending on product configuration)	
5 + n·24	X1	flags	-	-	Flags	
bits 1...0	U:2	jammingState	-	-	output from Jamming/Interference Monitor (0 = unknown or feature disabled, 1 = ok - no significant jamming, 2 = warning - interference visible but fix OK, 3 = critical - interference visible and no fix)	
6 + n·24	U1	antStatus	-	-	Status of the antenna supervisor state machine (0x00=INIT, 0x01=DONTKNOW, 0x02=OK, 0x03=SHORT, 0x04=OPEN)	
7 + n·24	U1	antPower	-	-	Current power status of antenna (0x00=OFF, 0x01=ON, 0x02=DONTKNOW)	
8 + n·24	U4	postStatus	-	-	POST status word	
12 + n·24	U1[4]	reserved1	-	-	Reserved	

16 + n·24	U2	noisePerMS	-	-	Noise level as measured by the GPS core
18 + n·24	U2	agcCnt	-	-	AGC Monitor (counts SIGHI xor SIGLO, range 0 to 8191)
20 + n·24	U1	jamInd	-	-	CW jamming indicator, scaled (0=no CW jamming, 255 = strong CW jamming)
21 + n·24	I1	ofsI	-	-	Imbalance of I-part of complex signal, scaled (-128 = max. negative imbalance, 127 = max. positive imbalance)
22 + n·24	U1	magI	-	-	Magnitude of I-part of complex signal, scaled (0 = no signal, 255 = max.magnitude)
23 + n·24	I1	ofsQ	-	-	Imbalance of Q-part of complex signal, scaled (-128 = max. negative imbalance, 127 = max. positive imbalance)
24 + n·24	U1	magQ	-	-	Magnitude of Q-part of complex signal, scaled (0 = no signal, 255 = max.magnitude)
25 + n·24	U1[3]	reserved2	-	-	Reserved

End of repeated group (*nBlocks* times)

3.14.10 UBX-MON-RXBUF (0x0a 0x07)

3.14.10.1 Receiver buffer status

Message	UBX-MON-RXBUF					
	Receiver buffer status					
Type	Periodic/polled					
Comment	This message is deprecated in this protocol version. Use UBX-MON-COMMS instead.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x0a	0x07	24	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U2[6]	pending	-	bytes	Number of bytes pending in receiver buffer for each target	
12	U1[6]	usage	-	%	Maximum usage receiver buffer during the last sysmon period for each target	
18	U1[6]	peakUsage	-	%	Maximum usage receiver buffer for each target	

3.14.11 UBX-MON-RXR (0x0a 0x21)

3.14.11.1 Receiver status information

Message	UBX-MON-RXR					
	Receiver status information					
Type	Output					
Comment	The receiver ready message is sent when the receiver changes from or to backup mode.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x0a	0x21	1	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	X1	flags	-	-	Receiver status flags	

bit 0 U:1 awake - - not in backup mode

3.14.12 UBX-MON-SPAN (0x0a 0x31)

3.14.12.1 Signal characteristics

Message	UBX-MON-SPAN					
	Signal characteristics					
Type	Periodic/pollled					
Comment	<p>This message is to be used as a basic spectrum analyzer, where it displays one spectrum for each of the receiver's existing RF paths. The spectrum is conveyed with the following parameters: The frequency span in Hz, the frequency bin resolution in Hz, the center frequency in Hz, and 256 bins with amplitude data. Additionally, in order to give further insight on the signal captured by the receiver, the current gain of the internal programmable gain amplifier (PGA) is provided.</p> <p>This message gives information for comparative analysis rather than absolute and precise spectrum overview. Users should not expect highly accurate spectrum amplitude.</p> <p>Note that the PGA gain is not included in the spectrum data but is available as a separate field. Neither the spectrum, nor the PGA gain considers the internal fixed LNA gain or an external third-party LNA.</p> <p>The center frequency at each bin, assuming a zero-based bin count, can be computed as</p> $f(i) = center + span * (i - 127) / 256$					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x0a	0x31	4 + numRfBlocks*272	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	version	-	-	Message version (0x00 for this version)	
1	U1	numRfBlocks	-	-	Number of RF blocks included	
2	U1[2]	reserved0	-	-	Reserved	
<i>Start of repeated group (numRfBlocks times)</i>						
4 + n*272	U1[256]	spectrum	-	dB	Spectrum data (number of points = span/res)	
260 + n*272	U4	span	-	Hz	Spectrum span	
264 + n*272	U4	res	-	Hz	Resolution of the spectrum	
268 + n*272	U4	center	-	Hz	Center of spectrum span	
272 + n*272	U1	pga	-	dB	Programmable gain amplifier	
273 + n*272	U1[3]	reserved1	-	-	Reserved	
<i>End of repeated group (numRfBlocks times)</i>						

3.14.13 UBX-MON-SPT (0x0a 0x2f)

3.14.13.1 Sensor production test

Message	UBX-MON-SPT					
	Sensor production test					
Type	Polled					
Comment	<p>This message reports the state of, and measurements made during, sensor self-tests.</p> <p>This message can also be used to retrieve information about detected sensor(s) and driver(s) used.</p> <p>This message is only supported if a sensor is directly connected to the u-blox chip. This includes modules that contain IMUs.</p> <p>Note that this message shows the status of the last self-test since sensor startup. The self-test results are not stored in non-volatile memory.</p>					

Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x0a	0x2f	4 + numSensor·4 + numRes·12	see below	CK_A CK_B
<i>Payload description:</i>						
Byte offset	Type	Name	Scale	Unit	Description	
0	U1	version	-	-	Message version (0x01 for this version)	
1	U1	numSensor	-	-	number of sensors reported in this message	
2	U1	numRes	-	-	number of result items reported in this message	
3	U1	reserved0	-	-	Reserved	
<i>Start of repeated group (numSensor times)</i>						
4 + n·4	U1	sensorId	-	-	Sensor ID	
						<p>The following IDs are defined, others are reserved:</p> <ul style="list-style-type: none"> • 1: ST LSM6DS0 6-axis IMU with temperature sensor • 2: Invensense MPU6500 6-axis IMU with temperature sensor • 3: Bosch BMI160 6-axis IMU with temperature sensor • 7: ST LSM6DS3 6-axis IMU with temperature sensor • 9: Bosch SMI130 6-axis IMU with temperature sensor • 12: MPU6515, 6-axis inertial sensor from Invensense • 13: ST LSM6DSL 6-axis IMU with temperature sensor • 14: SMG130, 3-axis gyroscope with temperature sensor from Bosch • 15: SMI230, 6-axis IMU with temperature sensor from Bosch • 16: BMI260, 6-axis IMU with temperature sensor from Bosch • 17: ICM330DLC, 6-axis IMU with temperature sensor from ST • 18: LSM6DSR, 6-axis IMU with 85 deg temperature sensor from ST • 19: ICM42605, 6-axis IMU with 85 deg temperature sensor from InvenSense TDK • 20: IIM42652, 6-axis IMU with 105 deg temperature sensor from InvenSense TDK • 21: BMI320, 6-axis IMU with 85 deg temperature sensor from Bosch • 22: IAM20680HT, 6-axis IMU with 105 deg temperature sensor from InvenSense TDK • 23: LSM6DSOW, 6-axis IMU with 85 deg temperature sensor from ST <p>Not all sensors are supported in any released firmware. Refer to the release notes to find out which sensor is supported by a certain firmware.</p>
5 + n·4	X1	drvVer	-	-	Version information	
bits 3...0	U:4	drvVerMaj	-	-	Driver major version	
bits 7...4	U:4	drvVerMin	-	-	Driver minor version	

6 + n·4	U1	testState	-	-	<p>State of one sensor's test, it can be</p> <ul style="list-style-type: none"> • 0: test not yet started • 1: test started but not yet finished • 2: test did not finish due to error during execution • 3: test finished normally, test data is available
7 + n·4	U1	drvFileName	-	-	<p>0 if the active driver is loaded from image, last character of the file name if it is loaded from separate file.</p>
<i>End of repeated group (numSensor times)</i>					
<i>Start of repeated group (numRes times)</i>					
4 + numSensor·4 + n·12	U2	sensorIdRes	-	-	<p>Sensor ID; eligible values are the same as in sensorIdState field</p>
6 + numSensor·4 + n·12	U2	sensorType	-	-	<p>Sensor type and axis (if applicable) to which the result refers</p> <p>The following values are defined, others are reserved:</p> <ul style="list-style-type: none"> • 5: Gyroscope z axis • 12: Gyroscope temperature • 13: Gyroscope y axis • 14: Gyroscope x axis • 16: Accelerometer x axis • 17: Accelerometer y axis • 18: Accelerometer z axis • 19: Barometer • 22: Magnetometer x axis • 23: Magnetometer y axis • 24: Magnetometer z axis • 25: Barometer temperature
8 + numSensor·4 + n·12	U2	resType	-	-	<p>The type of result stored in the value field</p> <ul style="list-style-type: none"> • 1: Measurement without self-test offset (raw and unscaled digital value) • 2: Measurement with positive self-test offset (raw and unscaled digital value) • 3: Measurement with negative self-test offset (raw and unscaled digital value) • 4: Minimum off-to-positive to pass self-test, as deduced from on-chip trimming information • 5: Maximum off-to-positive to pass self-test, as deduced from on-chip trimming information • 6: Minimum negative-to-positive to pass self-test, as deduced from on-chip trimming information • 7: Maximum negative-to-positive to pass self-test, as deduced from on-chip trimming information • 8: Self-test passed; test passed if value = 1 and failed if 0. Used if the decision is read out from the sensor itself.
10 + numSensor·4 + n·12	U1[2]	reserved1	-	-	Reserved
12 + numSensor·4 + n·12	I4	value	-	-	value of the specific test result

End of repeated group (*numRes* times)

3.14.14 UBX-MON-TXBUF (0x0a 0x08)

3.14.14.1 Transmitter buffer status

Message	UBX-MON-TXBUF					
	Transmitter buffer status					
Type	Periodic/pollled					
Comment	This message is deprecated in this protocol version. Use UBX-MON-COMMS instead.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x0a	0x08	28	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U2[6]	pending	-	bytes	Number of bytes pending in transmitter buffer for each target	
12	U1[6]	usage	-	%	Maximum usage transmitter buffer during the last sysmon period for each target	
18	U1[6]	peakUsage	-	%	Maximum usage transmitter buffer for each target	
24	U1	tUsage	-	%	Maximum usage of transmitter buffer during the last sysmon period for all targets	
25	U1	tPeakusage	-	%	Maximum usage of transmitter buffer for all targets	
26	X1	errors	-	-	Error bitmask	
	bits 5...0	U ₆	limit	-	-	Buffer limit of corresponding target reached
	bit 6	U ₁	mem	-	-	Memory Allocation error
	bit 7	U ₁	alloc	-	-	Allocation error (TX buffer full)
27	U1	reserved0	-	-	Reserved	

3.14.15 UBX-MON-VER (0x0a 0x04)

3.14.15.1 Receiver and software version

Message	UBX-MON-VER					
	Receiver and software version					
Type	Polled					
Comment						
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x0a	0x04	40 + [0..n]·30	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	CH[30]	swVersion	-	-	Nul-terminated software version string.	
30	CH[10]	hwVersion	-	-	Nul-terminated hardware version string	
Start of repeated group (<i>N</i> times)						

40 + n*30	CH[30]	extension	-	-	Extended software information strings. A series of nul-terminated strings. Each extension field is 30 characters long and contains varying software information. Not all extension fields may appear. Examples of reported information: the software version string of the underlying ROM (when the receiver's firmware is running from flash), the firmware version, the supported protocol version , the module identifier, the flash information structure (FIS) file information, the supported major GNSS, the supported augmentation systems. See Firmware and protocol versions for details.
-----------	--------	-----------	---	---	--

End of repeated group (N times)

3.15 UBX-NAV (0x01)

The messages in the UBX-NAV class are used to output navigation results and data, such as position, altitude and velocity in a number of formats, and status flags and accuracy estimate figures, or satellite and signal information. The messages are generated with the configured navigation rate.

3.15.1 UBX-NAV-ATT (0x01 0x05)

3.15.1.1 Attitude solution

Message	UBX-NAV-ATT					
	Attitude solution					
<i>Type</i>	Periodic/pollled					
<i>Comment</i>	This message outputs the attitude solution as roll, pitch and heading angles. See important comments concerning vehicle attitude given in the Vehicle attitude output section of the integration manual.					
<i>Message structure</i>	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x01	0x05	32	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	U1	version	-	-	Message version (0x00 for this version)	
5	U1[3]	reserved0	-	-	Reserved	
8	I4	roll	1e-5	deg	Vehicle roll.	
12	I4	pitch	1e-5	deg	Vehicle pitch.	
16	I4	heading	1e-5	deg	Vehicle heading.	
20	U4	accRoll	1e-5	deg	Vehicle roll accuracy (if null, roll angle is not available).	
24	U4	accPitch	1e-5	deg	Vehicle pitch accuracy (if null, pitch angle is not available).	
28	U4	accHeading	1e-5	deg	Vehicle heading accuracy (if null, heading angle is not available).	

3.15.2 UBX-NAV-CLOCK (0x01 0x22)

3.15.2.1 Clock solution

Message		UBX-NAV-CLOCK				
		Clock solution				
Type	Periodic/pollled					
Comment						
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x01	0x22	20	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section Navigation epochs in the integration manual for details. See section iTOW timestamps in the integration manual for details.	
4	I4	clkB	-	ns	Clock bias	
8	I4	clkD	-	ns/s	Clock drift	
12	U4	tAcc	-	ns	Time accuracy estimate	
16	U4	fAcc	-	ps/s	Frequency accuracy estimate	

3.15.3 UBX-NAV-COV (0x01 0x36)

3.15.3.1 Covariance matrices

Message		UBX-NAV-COV				
		Covariance matrices				
Type	Periodic/pollled					
Comment						
This message outputs the covariance matrices for the position and velocity solutions in the topocentric coordinate system defined as the local-level North (N), East (E), Down (D) frame. As the covariance matrices are symmetric, only the upper triangular part is output.						
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x01	0x36	64	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	U1	version	-	-	Message version (0x00 for this version)	
5	U1	posCovValid	-	-	Position covariance matrix validity flag	
6	U1	velCovValid	-	-	Velocity covariance matrix validity flag	
7	U1[9]	reserved0	-	-	Reserved	
16	R4	posCovNN	-	m ²	Position covariance matrix value p _{NN}	
20	R4	posCovNE	-	m ²	Position covariance matrix value p _{NE}	
24	R4	posCovND	-	m ²	Position covariance matrix value p _{ND}	
28	R4	posCovEE	-	m ²	Position covariance matrix value p _{EE}	
32	R4	posCovED	-	m ²	Position covariance matrix value p _{ED}	
36	R4	posCovDD	-	m ²	Position covariance matrix value p _{DD}	
40	R4	velCovNN	-	m ² /s ²	Velocity covariance matrix value v _{NN}	

44	R4	velCovNE	-	m^2/s^2	Velocity covariance matrix value v_NE
48	R4	velCovND	-	m^2/s^2	Velocity covariance matrix value v_ND
52	R4	velCovEE	-	m^2/s^2	Velocity covariance matrix value v_EE
56	R4	velCovED	-	m^2/s^2	Velocity covariance matrix value v_ED
60	R4	velCovDD	-	m^2/s^2	Velocity covariance matrix value v_DD

3.15.4 UBX-NAV-DOP (0x01 0x04)

3.15.4.1 Dilution of precision

Message	UBX-NAV-DOP					
	Dilution of precision					
Type	Periodic/pollled					
Comment	<ul style="list-style-type: none"> DOP values are dimensionless. All DOP values are scaled by a factor of 100. If the unit transmits a value of e.g. 156, the DOP value is 1.56. 					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x01	0x04	18	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	U2	gDOP	0.01	-	Geometric DOP	
6	U2	pDOP	0.01	-	Position DOP	
8	U2	tDOP	0.01	-	Time DOP	
10	U2	vDOP	0.01	-	Vertical DOP	
12	U2	hDOP	0.01	-	Horizontal DOP	
14	U2	nDOP	0.01	-	Northing DOP	
16	U2	eDOP	0.01	-	Easting DOP	

3.15.5 UBX-NAV-EELL (0x01 0x3d)

3.15.5.1 Position error ellipse parameters

Message	UBX-NAV-EELL					
	Position error ellipse parameters					
Type	Periodic/pollled					
Comment	This message outputs the error ellipse parameters for the position solutions.					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x01	0x3d	16	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	U1	version	-	-	Message version (0x00 for this version)	
5	U1	reserved0	-	-	Reserved	

6	U2	errEllipse Orient	1e-2	deg	Orientation of semi-major axis of error ellipse (degrees from true north)
8	U4	errEllipse Major	-	mm	Semi-major axis of error ellipse
12	U4	errEllipse Minor	-	mm	Semi-minor axis of error ellipse

3.15.6 UBX-NAV-EOE (0x01 0x61)

3.15.6.1 End of epoch

Message	UBX-NAV-EOE					
	End of epoch					
Type	Periodic					
Comment	This message is intended to be used as a marker to collect all navigation messages of an epoch. It is output after all enabled NAV class messages and after all enabled NMEA messages.					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x01	0x61	4	see below	CK_A CK_B
Payload description:						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	

3.15.7 UBX-NAV-GEOFENCE (0x01 0x39)

3.15.7.1 Geofencing status

Message	UBX-NAV-GEOFENCE					
	Geofencing status					
Type	Periodic/pollled					
Comment	This message outputs the evaluated states of all configured geofences for the current epoch's position. See section Geofencing in the integration manual for feature details.					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x01	0x39	8 + numFences*2	see below	CK_A CK_B
Payload description:						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	U1	version	-	-	Message version (0x00 for this version)	
5	U1	status	-	-	Geofencing status <ul style="list-style-type: none"> 0 - Geofencing not available or not reliable 1 - Geofencing active 	
6	U1	numFences	-	-	Number of geofences	
7	U1	combState	-	-	Combined (logical OR) state of all geofences <ul style="list-style-type: none"> 0 - Unknown 1 - Inside 2 - Outside 	
<i>Start of repeated group (numFences times)</i>						

8 + n·2	U1	state	-	-	Geofence state <ul style="list-style-type: none"> • 0 - Unknown • 1 - Inside • 2 - Outside
9 + n·2	U1	id	-	-	Geofence ID (0 = not available)
<i>End of repeated group (numFences times)</i>					

3.15.8 UBX-NAV-HPPOSECEF (0x01 0x13)

3.15.8.1 High precision position solution in ECEF

Message	UBX-NAV-HPPOSECEF				
	High precision position solution in ECEF				
<i>Type</i>	Periodic/pollled				
<i>Comment</i>	See important comments concerning validity of position given in section Navigation output filters in the integration manual.				
<i>Message structure</i>	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>
	0xb5 0x62	0x01	0x13	28	see below
					CK_A CK_B
<i>Payload description:</i>					
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>
0	U1	version	-	-	Message version (0x00 for this version)
1	U1[3]	reserved0	-	-	Reserved
4	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.
8	I4	ecefX	-	cm	ECEF X coordinate
12	I4	ecefY	-	cm	ECEF Y coordinate
16	I4	ecefZ	-	cm	ECEF Z coordinate
20	I1	ecefXHp	0.1	mm	High precision component of ECEF X coordinate. Must be in the range of -99..+99. Precise coordinate in cm = ecefX + (ecefXHp * 1e-2).
21	I1	ecefYHp	0.1	mm	High precision component of ECEF Y coordinate. Must be in the range of -99..+99. Precise coordinate in cm = ecefY + (ecefYHp * 1e-2).
22	I1	ecefZHp	0.1	mm	High precision component of ECEF Z coordinate. Must be in the range of -99..+99. Precise coordinate in cm = ecefZ + (ecefZHp * 1e-2).
23	X1	flags	-	-	Additional flags
	bit 0 U ₁	invalidEcef	-	-	1 = Invalid ecefX, ecefY, ecefZ, ecefXHp, ecefYHp and ecefZHp
24	U4	pAcc	0.1	mm	Position Accuracy Estimate

3.15.9 UBX-NAV-HPPOSLLH (0x01 0x14)

3.15.9.1 High precision geodetic position solution

Message	UBX-NAV-HPPOSLLH				
	High precision geodetic position solution				
<i>Type</i>	Periodic/pollled				

Comment See important comments concerning validity of position given in section Navigation output filters in the integration manual.

This message outputs the Geodetic position in the currently selected ellipsoid. The default is the WGS84 Ellipsoid, but can be changed with the message [CFG-NAVSPG-USE_USRDAT](#).

Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x01	0x14	36	see below	CK_A CK_B

Payload description:

Byte offset	Type	Name	Scale	Unit	Description
0	U1	version	-	-	Message version (0x00 for this version)
1	U1[2]	reserved0	-	-	Reserved
3	X1	flags	-	-	Additional flags
	bit 0 U:1	invalidLlh	-	-	1 = Invalid lon, lat, height, hMSL, lonHp, latHp, heightHp and hMSLHp
4	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.
8	I4	lon	1e-7	deg	Longitude
12	I4	lat	1e-7	deg	Latitude
16	I4	height	-	mm	Height above ellipsoid.
20	I4	hMSL	-	mm	Height above mean sea level
24	I1	lonHp	1e-9	deg	High precision component of longitude. Must be in the range -99..+99. Precise longitude in deg * 1e-7 = lon + (lonHp * 1e-2).
25	I1	latHp	1e-9	deg	High precision component of latitude. Must be in the range -99..+99. Precise latitude in deg * 1e-7 = lat + (latHp * 1e-2).
26	I1	heightHp	0.1	mm	High precision component of height above ellipsoid. Must be in the range -9..+9. Precise height in mm = height + (heightHp * 0.1).
27	I1	hMSLHp	0.1	mm	High precision component of height above mean sea level. Must be in range -9..+9. Precise height in mm = hMSL + (hMSLHp * 0.1)
28	U4	hAcc	0.1	mm	Horizontal accuracy estimate
32	U4	vAcc	0.1	mm	Vertical accuracy estimate

3.15.10 UBX-NAV-ORB (0x01 0x34)

3.15.10.1 GNSS orbit database info

Message	UBX-NAV-ORB GNSS orbit database info					
Type	Periodic/polled					
Comment	Status of the GNSS orbit database knowledge.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x01	0x34	8 + numSv-6	see below	CK_A CK_B

Payload description:

Byte offset	Type	Name	Scale	Unit	Description
-------------	------	------	-------	------	-------------

0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	U1	version	-	-	Message version (0x01 for this version)	
5	U1	numSv	-	-	Number of SVs in the database	
6	U1[2]	reserved0	-	-	Reserved	
<i>Start of repeated group (numSv times)</i>						
8 + n·6	U1	gnssId	-	-	GNSS ID	
9 + n·6	U1	svId	-	-	Satellite ID	
10 + n·6	X1	svFlag	-	-	Information Flags	
	bits 1...0	U ₂	health	-	-	SV health: <ul style="list-style-type: none"> • 0 = unknown • 1 = healthy • 2 = not healthy
	bits 3...2	U ₂	visibility	-	-	SV health: <ul style="list-style-type: none"> • 0 = unknown • 1 = below horizon • 2 = above horizon • 3 = above elevation mask
11 + n·6	X1	eph	-	-	Ephemeris data In products supporting L5 signals, the receiver may store multiple ephemeris data sets per satellite. ephUsability and ephSource fields show information on one of the data sets. It is not possible to choose which data set's status is shown.	
	bits 4...0	U ₅	ephUsability	-	-	How long the receiver will be able to use the stored ephemeris data from now on: <ul style="list-style-type: none"> • 31 = The usability period is unknown • 30 = The usability period is more than 450 minutes • 30 > n > 0 = The usability period is between (n-1)*15 and n*15 minutes • 0 = Ephemeris can no longer be used
	bits 7...5	U ₃	ephSource	-	-	<ul style="list-style-type: none"> • 0 = not available • 1 = GNSS transmission • 2 = external aiding • 3-7 = other
12 + n·6	X1	alm	-	-	Almanac data	
	bits 4...0	U ₅	almUsability	-	-	How long the receiver will be able to use the stored almanac data from now on: <ul style="list-style-type: none"> • 31 = The usability period is unknown • 30 = The usability period is more than 30 days • 30 > n > 0 = The usability period is between n-1 and n days • 0 = Almanac can no longer be used
	bits 7...5	U ₃	almSource	-	-	<ul style="list-style-type: none"> • 0 = not available • 1 = GNSS transmission • 2 = external aiding • 3-7 = other
13 + n·6	X1	otherOrb	-	-	Other orbit data available	
	bits 4...0	U ₅	anoAop Usability	-	-	How long the receiver will be able to use the orbit data from now on:

- 31 = The usability period is unknown
- 30 = The usability period is more than 30 days
- 30 > n > 0 = The usability period is between n-1 and n days
- 0 = Data can no longer be used

bits 7...5 U₃ type - -

Type of orbit data:

- 0 = No orbit data available
- 1 = AssistNow Offline data
- 2 = AssistNow Autonomous data
- 3-7 = Other orbit data

End of repeated group (*numSv* times)

3.15.11 UBX-NAV-POSECEF (0x01 0x01)

3.15.11.1 Position solution in ECEF

Message	UBX-NAV-POSECEF Position solution in ECEF					
Type	Periodic/pollled					
Comment	See important comments concerning validity of position given in section Navigation output filters in the integration manual.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x01	0x01	20	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	I4	ecefX	-	cm	ECEF X coordinate	
8	I4	ecefY	-	cm	ECEF Y coordinate	
12	I4	ecefZ	-	cm	ECEF Z coordinate	
16	U4	pAcc	-	cm	Position Accuracy Estimate	

3.15.12 UBX-NAV-POSLLH (0x01 0x02)

3.15.12.1 Geodetic position solution

Message	UBX-NAV-POSLLH Geodetic position solution					
Type	Periodic/pollled					
Comment	See important comments concerning validity of position given in section Navigation output filters in the integration manual. This message outputs the Geodetic position in the currently selected ellipsoid. The default is the WGS84 Ellipsoid, but can be changed with the message CFG-NAVSPG-USE_USRDAT .					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x01	0x02	28	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	

4	I4	lon	1e-7	deg	Longitude
8	I4	lat	1e-7	deg	Latitude
12	I4	height	-	mm	Height above ellipsoid
16	I4	hMSL	-	mm	Height above mean sea level
20	U4	hAcc	-	mm	Horizontal accuracy estimate
24	U4	vAcc	-	mm	Vertical accuracy estimate

3.15.13 UBX-NAV-PVAT (0x01 0x17)

3.15.13.1 Navigation position velocity attitude time solution

Message		UBX-NAV-PVAT				
		Navigation position velocity attitude time solution				
<i>Type</i>	Periodic/pollled					
<i>Comment</i>	This message combines position, velocity, attitude and time solution, including accuracy figures. Note that during a leap second there may be more or less than 60 seconds in a minute. See description of leap seconds in the integration manual for details.					
<i>Message structure</i>	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x01	0x17	116	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	U1	version	-	-	Message version (0x00 for this version)	
5	X1	valid	-	-	Validity flags	
bit 0	U:1	validDate	-	-	1 = valid UTC Date (see section Time validity in the integration manual for details)	
bit 1	U:1	validTime	-	-	1 = valid UTC time of day (see section Time validity in the integration manual for details)	
bit 2	U:1	fullyResolved	-	-	1 = UTC time of day has been fully resolved (no seconds uncertainty). Cannot be used to check if time is completely solved.	
bit 3	U:1	validMag	-	-	1 = valid magnetic declination	
6	U2	year	-	y	Year (UTC)	
8	U1	month	-	month	Month, range 1..12 (UTC)	
9	U1	day	-	d	Day of month, range 1..31 (UTC)	
10	U1	hour	-	h	Hour of day, range 0..23 (UTC)	
11	U1	min	-	min	Minute of hour, range 0..59 (UTC)	
12	U1	sec	-	s	Seconds of minute, range 0..60 (UTC)	
13	U1	reserved0	-	-	Reserved	
14	U1[2]	reserved1	-	-	Reserved	
16	U4	tAcc	-	ns	Time accuracy estimate (UTC)	
20	I4	nano	-	ns	Fraction of second, range -1e9 .. 1e9 (UTC)	

24	U1	fixType	-	-	GNSSfix Type: <ul style="list-style-type: none"> • 0 = no fix • 1 = dead reckoning only • 2 = 2D-fix • 3 = 3D-fix • 4 = GNSS + dead reckoning combined • 5 = time only fix
25	X1	flags	-	-	Fix status flags
	bit 0	U:1 gnssFixOK	-	-	1 = valid fix (i.e within DOP & accuracy masks)
	bit 1	U:1 diffSoln	-	-	1 = differential corrections were applied
	bit 3	U:1 vehRollValid	-	-	1 = roll of vehicle is valid, only set if the receiver is in sensor fusion mode
	bit 4	U:1 vehPitchValid	-	-	1 = pitch of vehicle is valid, only set if the receiver is in sensor fusion mode
	bit 5	U:1 vehHeadingValid	-	-	1 = heading of vehicle is valid, only set if the receiver is in sensor fusion mode
	bits 7...6	U:2 carrSoln	-	-	Carrier range solution status: <ul style="list-style-type: none"> • 0 = no carrier range solution • 1 = carrier range solution with float ambiguities • 2 = carrier range solution with fixed ambiguities
26	X1	flags2	-	-	Additional flags
	bit 5	U:1 confirmedAvai	-	-	1 = information about UTC Date and Time of Day validity confirmation is available (see section Time validity in the integration manual for details)
	bit 6	U:1 confirmedDate	-	-	1 = UTC Date validity could be confirmed (see section Time validity in the integration manual for details)
	bit 7	U:1 confirmedTime	-	-	1 = UTC Time of Day could be confirmed (see section Time validity in the integration manual for details)
27	U1	numSV	-	-	Number of satellites used in Nav Solution
28	I4	lon	1e-7	deg	Longitude
32	I4	lat	1e-7	deg	Latitude
36	I4	height	-	mm	Height above ellipsoid
40	I4	hMSL	-	mm	Height above mean sea level
44	U4	hAcc	-	mm	Horizontal accuracy estimate
48	U4	vAcc	-	mm	Vertical accuracy estimate
52	I4	velN	-	mm/s	NED north velocity
56	I4	velE	-	mm/s	NED east velocity
60	I4	velD	-	mm/s	NED down velocity
64	I4	gSpeed	-	mm/s	Ground Speed (2-D)
68	U4	sAcc	-	mm/s	Speed accuracy estimate
72	I4	vehRoll	1e-5	deg	Vehicle roll.
76	I4	vehPitch	1e-5	deg	Vehicle pitch.
80	I4	vehHeading	1e-5	deg	Vehicle heading.
84	I4	motHeading	1e-5	deg	Motion heading.
88	U2	accRoll	1e-2	deg	Vehicle roll accuracy (if null, roll angle is not available).
90	U2	accPitch	1e-2	deg	Vehicle pitch accuracy (if null, pitch angle is not available).

92	U2	accHeading	1e-2	deg	Vehicle heading accuracy (if null, heading angle is not available).
94	I2	magDec	1e-2	deg	Magnetic declination.
96	U2	magAcc	1e-2	deg	Magnetic declination accuracy.
98	U2	errEllipseOrient	1e-2	deg	Orientation of semi-major axis of error ellipse (degrees from true north)
100	U4	errEllipseMajor	-	mm	Semi-major axis of error ellipse
104	U4	errEllipseMinor	-	mm	Semi-minor axis of error ellipse
108	U1[4]	reserved2	-	-	Reserved
112	U1[4]	reserved3	-	-	Reserved

3.15.14 UBX-NAV-PVT (0x01 0x07)

3.15.14.1 Navigation position velocity time solution


Message	UBX-NAV-PVT					
	Navigation position velocity time solution					
<i>Type</i>	Periodic/pollled					
<i>Comment</i>	This message combines position, velocity and time solution, including accuracy figures. Note that during a leap second there may be more or less than 60 seconds in a minute. See description of leap seconds in the integration manual for details.					
<i>Message structure</i>	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x01	0x07	92	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	U2	year	-	y	Year (UTC)	
6	U1	month	-	month	Month, range 1..12 (UTC)	
7	U1	day	-	d	Day of month, range 1..31 (UTC)	
8	U1	hour	-	h	Hour of day, range 0..23 (UTC)	
9	U1	min	-	min	Minute of hour, range 0..59 (UTC)	
10	U1	sec	-	s	Seconds of minute, range 0..60 (UTC)	
11	X1	valid	-	-	Validity flags	
	bit 0	U _{:1}	validDate	-	-	1 = valid UTC Date (see section Time validity in the integration manual for details)
	bit 1	U _{:1}	validTime	-	-	1 = valid UTC time of day (see section Time validity in the integration manual for details)
	bit 2	U _{:1}	fullyResolved	-	-	1 = UTC time of day has been fully resolved (no seconds uncertainty). Cannot be used to check if time is completely solved.
	bit 3	U _{:1}	validMag	-	-	1 = valid magnetic declination
12	U4	tAcc	-	ns	Time accuracy estimate (UTC)	
16	I4	nano	-	ns	Fraction of second, range -1e9 .. 1e9 (UTC)	

20	U1	fixType	-	-	GNSSfix Type: <ul style="list-style-type: none"> 0 = no fix 1 = dead reckoning only 2 = 2D-fix 3 = 3D-fix 4 = GNSS + dead reckoning combined 5 = time only fix
21	X1	flags	-	-	Fix status flags
	bit 0	U:1 gnssFixOK	-	-	1 = valid fix (i.e within DOP & accuracy masks)
	bit 1	U:1 diffSoln	-	-	1 = differential corrections were applied
	bits 4...2	U:3 psmState	-	-	Power save mode state (see Power management section in the integration manual for details). <ul style="list-style-type: none"> 0 = PSM is not active 1 = Enabled (an intermediate state before Acquisition state) 2 = Acquisition 3 = Tracking 4 = Power Optimized Tracking 5 = Inactive
	bit 5	U:1 headVehValid	-	-	1 = heading of vehicle is valid, only set if the receiver is in sensor fusion mode
	bits 7...6	U:2 carrSoln	-	-	Carrier phase range solution status: <ul style="list-style-type: none"> 0 = no carrier phase range solution 1 = carrier phase range solution with floating ambiguities 2 = carrier phase range solution with fixed ambiguities (not supported for protocol versions less than 20.00)
22	X1	flags2	-	-	Additional flags
	bit 5	U:1 confirmedAvai	-	-	1 = information about UTC Date and Time of Day validity confirmation is available (see section Time validity in the integration manual for details) This flag is only supported in Protocol Versions 19.00, 19.10, 20.10, 20.20, 20.30, 22.00, 23.00, 23.01, 27 and 28.
	bit 6	U:1 confirmedDate	-	-	1 = UTC Date validity could be confirmed (see section Time validity in the integration manual for details)
	bit 7	U:1 confirmedTime	-	-	1 = UTC Time of Day could be confirmed (see section Time validity in the integration manual for details)
23	U1	numSV	-	-	Number of satellites used in Nav Solution
24	I4	lon	1e-7	deg	Longitude
28	I4	lat	1e-7	deg	Latitude
32	I4	height	-	mm	Height above ellipsoid
36	I4	hMSL	-	mm	Height above mean sea level
40	U4	hAcc	-	mm	Horizontal accuracy estimate
44	U4	vAcc	-	mm	Vertical accuracy estimate
48	I4	velN	-	mm/s	NED north velocity
52	I4	velE	-	mm/s	NED east velocity
56	I4	velD	-	mm/s	NED down velocity
60	I4	gSpeed	-	mm/s	Ground Speed (2-D)

64	I4	headMot	1e-5	deg	Heading of motion (2-D)	
68	U4	sAcc	-	mm/s	Speed accuracy estimate	
72	U4	headAcc	1e-5	deg	Heading accuracy estimate (both motion and vehicle)	
76	U2	pDOP	0.01	-	Position DOP	
78	X2	flags3	-	-	Additional flags	
	bit 0	U:1	invalidLlh	-	-	1 = Invalid lon, lat, height and hMSL
	bits 4...1	U:4	lastCorrection Age	-	-	Age of the most recently received differential correction: <ul style="list-style-type: none"> • 0 = Not available • 1 = Age between 0 and 1 second • 2 = Age between 1 (inclusive) and 2 seconds • 3 = Age between 2 (inclusive) and 5 seconds • 4 = Age between 5 (inclusive) and 10 seconds • 5 = Age between 10 (inclusive) and 15 seconds • 6 = Age between 15 (inclusive) and 20 seconds • 7 = Age between 20 (inclusive) and 30 seconds • 8 = Age between 30 (inclusive) and 45 seconds • 9 = Age between 45 (inclusive) and 60 seconds • 10 = Age between 60 (inclusive) and 90 seconds • 11 = Age between 90 (inclusive) and 120 seconds • >=12 = Age greater or equal than 120 seconds
80	U1[4]	reserved0	-	-	Reserved	
84	I4	headVeh	1e-5	deg	Heading of vehicle (2-D), this is only valid when headVehValid is set, otherwise the output is set to the heading of motion	
88	I2	magDec	1e-2	deg	Magnetic declination. Only supported in ADR 4.10 and later.	
90	U2	magAcc	1e-2	deg	Magnetic declination accuracy. Only supported in ADR 4.10 and later.	

3.15.15 UBX-NAV-RELPOSNED (0x01 0x3c)

3.15.15.1 Relative positioning information in NED frame

Message	UBX-NAV-RELPOSNED Relative positioning information in NED frame					
Type	Periodic/pollled					
Comment	This message contains the relative position vector from the reference station to the rover, including accuracy figures, in the local topological system defined at the reference station.  The NED frame is defined as the local topological system at the reference station. The relative position vector components in this message, along with their associated accuracies, are given in that local topological system.					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x01	0x3c	64	see below	CK_A CK_B
Payload description:						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	version	-	-	Message version (0x01 for this version)	
1	U1	reserved0	-	-	Reserved	
2	U2	refStationId	-	-	Reference station ID. Must be in the range 0..4095.	

4	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
8	I4	relPosN	-	cm	North component of relative position vector	
12	I4	relPosE	-	cm	East component of relative position vector	
16	I4	relPosD	-	cm	Down component of relative position vector	
20	I4	relPosLength	-	cm	Length of the relative position vector	
24	I4	relPosHeading	1e-5	deg	Heading of the relative position vector	
28	U1[4]	reserved1	-	-	Reserved	
32	I1	relPosHPN	0.1	mm	High-precision North component of relative position vector. Must be in the range -99 to +99. The full North component of the relative position vector, in units of cm, is given by $\text{relPosN} + (\text{relPosHPN} * 1e-2)$	
33	I1	relPosHPE	0.1	mm	High-precision East component of relative position vector. Must be in the range -99 to +99. The full East component of the relative position vector, in units of cm, is given by $\text{relPosE} + (\text{relPosHPE} * 1e-2)$	
34	I1	relPosHPD	0.1	mm	High-precision Down component of relative position vector. Must be in the range -99 to +99. The full Down component of the relative position vector, in units of cm, is given by $\text{relPosD} + (\text{relPosHPD} * 1e-2)$	
35	I1	relPosHPLength	0.1	mm	High-precision component of the length of the relative position vector. Must be in the range -99 to +99. The full length of the relative position vector, in units of cm, is given by $\text{relPosLength} + (\text{relPosHPLength} * 1e-2)$	
36	U4	accN	0.1	mm	Accuracy of relative position North component	
40	U4	accE	0.1	mm	Accuracy of relative position East component	
44	U4	accD	0.1	mm	Accuracy of relative position Down component	
48	U4	accLength	0.1	mm	Accuracy of length of the relative position vector	
52	U4	accHeading	1e-5	deg	Accuracy of heading of the relative position vector	
56	U1[4]	reserved2	-	-	Reserved	
60	X4	flags	-	-	Flags	
	bit 0	U _{:1}	gnssFixOK	-	-	A valid fix (i.e within DOP & accuracy masks)
	bit 1	U _{:1}	diffSoln	-	-	1 if differential corrections were applied
	bit 2	U _{:1}	relPosValid	-	-	1 if relative position components and accuracies are valid and, in moving base mode only, if baseline is valid
	bits 4...3	U _{:2}	carrSoln	-	-	Carrier phase range solution status: <ul style="list-style-type: none"> 0 = no carrier phase range solution 1 = carrier phase range solution with floating ambiguities

- 2 = carrier phase range solution with fixed ambiguities

bit 5	U:1	isMoving	-	-	1 if the receiver is operating in moving base mode
bit 6	U:1	refPosMiss	-	-	1 if extrapolated reference position was used to compute moving base solution this epoch. (Flag set for protocol versions 27.10, and 27.11, and 31.11)
bit 7	U:1	refObsMiss	-	-	1 if extrapolated reference observations were used to compute moving base solution this epoch. (Flag set for protocol versions 27.10, and 27.11, and 31.11)
bit 8	U:1	relPosHeading Valid	-	-	1 if relPosHeading is valid
bit 9	U:1	relPos Normalized	-	-	1 if the components of the relative position vector (including the high-precision parts) are normalized

3.15.16 UBX-NAV-SAT (0x01 0x35)

3.15.16.1 Satellite information

Message	UBX-NAV-SAT					
	Satellite information					
Type	Periodic/polled					
Comment	This message displays information about SVs that are either known to be visible or currently tracked by the receiver. All signal related information corresponds to the subset of signals specified in Signal Identifiers .					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x01	0x35	8 + numSvs·12	see below	CK_A CK_B
Payload description:						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	U1	version	-	-	Message version (0x01 for this version)	
5	U1	numSvs	-	-	Number of satellites	
6	U1[2]	reserved0	-	-	Reserved	
Start of repeated group (numSvs times)						
8 + n·12	U1	gnssId	-	-	GNSS identifier (see Satellite Numbering) for assignment	
9 + n·12	U1	svId	-	-	Satellite identifier (see Satellite Numbering) for assignment	
10 + n·12	U1	cno	-	dBHz	Carrier to noise ratio (signal strength)	
11 + n·12	I1	elev	-	deg	Elevation (range: +/-90), unknown if out of range	
12 + n·12	I2	azim	-	deg	Azimuth (range 0-360), unknown if elevation is out of range	
14 + n·12	I2	prRes	0.1	m	Pseudorange residual	
16 + n·12	X4	flags	-	-	Bitmask	
bits 2...0	U:3	qualityInd	-	-	Signal quality indicator: <ul style="list-style-type: none"> • 0 = no signal • 1 = searching signal • 2 = signal acquired • 3 = signal detected but unusable • 4 = code locked and time synchronized 	

					<ul style="list-style-type: none"> 5, 6, 7 = code and carrier locked and time synchronized
bit 3	U:1	svUsed	-	-	1 = Signal in the subset specified in Signal Identifiers is currently being used for navigation
bits 5...4	U:2	health	-	-	Signal health flag: <ul style="list-style-type: none"> 0 = unknown 1 = healthy 2 = unhealthy
bit 6	U:1	diffCorr	-	-	1 = differential correction data is available for this SV
bit 7	U:1	smoothed	-	-	1 = carrier smoothed pseudorange used
bits 10...8	U:3	orbitSource	-	-	Orbit source: <ul style="list-style-type: none"> 0 = no orbit information is available for this SV 1 = ephemeris is used 2 = almanac is used 3 = AssistNow Offline orbit is used 4 = AssistNow Autonomous orbit is used 5, 6, 7 = other orbit information is used
bit 11	U:1	ephAvail	-	-	1 = ephemeris is available for this SV
bit 12	U:1	almAvail	-	-	1 = almanac is available for this SV
bit 13	U:1	anoAvail	-	-	1 = AssistNow Offline data is available for this SV
bit 14	U:1	aopAvail	-	-	1 = AssistNow Autonomous data is available for this SV
bit 16	U:1	sbasCorrUsed	-	-	1 = SBAS corrections have been used for a signal in the subset specified in Signal Identifiers
bit 17	U:1	rtcmCorrUsed	-	-	1 = RTCM corrections have been used for a signal in the subset specified in Signal Identifiers
bit 18	U:1	slasCorrUsed	-	-	1 = QZSS SLAS corrections have been used for a signal in the subset specified in Signal Identifiers
bit 19	U:1	spartnCorrUsed	-	-	1 = SPARTN corrections have been used for a signal in the subset specified in Signal Identifiers
bit 20	U:1	prCorrUsed	-	-	1 = Pseudorange corrections have been used for a signal in the subset specified in Signal Identifiers
bit 21	U:1	crCorrUsed	-	-	1 = Carrier range corrections have been used for a signal in the subset specified in Signal Identifiers
bit 22	U:1	doCorrUsed	-	-	1 = Range rate (Doppler) corrections have been used for a signal in the subset specified in Signal Identifiers
bit 23	U:1	clasCorrUsed	-	-	1 = CLAS corrections have been used for a signal in the subset specified in Signal Identifiers

End of repeated group (*numSvs* times)

3.15.17 UBX-NAV-SBAS (0x01 0x32)

3.15.17.1 SBAS status data

Message	UBX-NAV-SBAS SBAS status data					
<i>Type</i>	Periodic/pollled					
<i>Comment</i>	This message outputs the status of the SBAS sub system					
<i>Message structure</i>	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x01	0x32	12 + cnt·12	see below	CK_A CK_B

Payload description:

Byte offset	Type	Name	Scale	Unit	Description
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See the description of iTOW for details.
4	U1	geo	-	-	PRN Number of the GEO where correction and integrity data is used from
5	U1	mode	-	-	SBAS Mode <ul style="list-style-type: none"> 0 Disabled 1 Enabled integrity 3 Enabled test mode
6	I1	sys	-	-	SBAS System (WAAS/EGNOS/...) <ul style="list-style-type: none"> -1 Unknown 0 WAAS 1 EGNOS 2 MSAS 3 GAGAN 16 GPS
7	X1	service	-	-	SBAS Services available
	bit 0 U:1	Ranging	-	-	GEO may be used as ranging source
	bit 1 U:1	Corrections	-	-	GEO is providing correction data
	bit 2 U:1	Integrity	-	-	GEO is providing integrity
	bit 3 U:1	Testmode	-	-	GEO is in test mode
	bit 4 U:1	Bad	-	-	Problem with signal or broadcast data indicated
8	U1	cnt	-	-	Number of SV data following
9	X1	statusFlags	-	-	SBAS status flags
	bits 1...0 U:2	integrityUsed	-	-	SBAS integrity used <ul style="list-style-type: none"> 0 = Unknown 1 = Integrity information is not available or SBAS integrity is not enabled 2 = Receiver uses only GPS satellites for which integrity information is available
10	U1[2]	reserved0	-	-	Reserved
<i>Start of repeated group (cnt times)</i>					
12 + n·12	U1	svid	-	-	SV ID
13 + n·12	U1	flags	-	-	Flags for this SV
14 + n·12	U1	udre	-	-	Monitoring status
15 + n·12	U1	svSys	-	-	System (WAAS/EGNOS/...) same as SYS
16 + n·12	U1	svService	-	-	Services available same as SERVICE
17 + n·12	U1	reserved1	-	-	Reserved
18 + n·12	I2	prc	-	cm	Pseudo Range correction in [cm]
20 + n·12	U1[2]	reserved2	-	-	Reserved
22 + n·12	I2	ic	-	cm	Ionosphere correction in [cm]
<i>End of repeated group (cnt times)</i>					

3.15.18 UBX-NAV-SIG (0x01 0x43)

3.15.18.1 Signal information

Message		UBX-NAV-SIG				
		Signal information				
<i>Type</i>	Periodic/pollled					
<i>Comment</i>	This message displays information about signals currently tracked by the receiver.					
<i>Message structure</i>	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x01	0x43	8 + numSigs·16	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	U1	version	-	-	Message version (0x00 for this version)	
5	U1	numSigs	-	-	Number of signals	
6	U1[2]	reserved0	-	-	Reserved	
<i>Start of repeated group (numSigs times)</i>						
8 + n·16	U1	gnssId	-	-	GNSS identifier (see Satellite Numbering) for assignment	
9 + n·16	U1	svId	-	-	Satellite identifier (see Satellite Numbering) for assignment	
10 + n·16	U1	sigId	-	-	New style signal identifier (see Signal Identifiers)	
11 + n·16	U1	freqId	-	-	Only used for GLONASS: This is the frequency slot + 7 (range from 0 to 13)	
12 + n·16	I2	prRes	0.1	m	Pseudorange residual	
14 + n·16	U1	cno	-	dBHz	Carrier-to-noise density ratio (signal strength)	
15 + n·16	U1	qualityInd	-	-	Signal quality indicator: <ul style="list-style-type: none"> • 0 = no signal • 1 = searching signal • 2 = signal acquired • 3 = signal detected but unusable • 4 = code locked and time synchronized • 5, 6, 7 = code and carrier locked and time synchronized 	
16 + n·16	U1	corrSource	-	-	Correction source: <ul style="list-style-type: none"> • 0 = no corrections • 1 = SBAS corrections • 2 = BeiDou corrections • 3 = RTCM2 corrections • 4 = RTCM3 OSR corrections • 5 = RTCM3 SSR corrections • 6 = QZSS SLAS corrections • 7 = SPARTN corrections • 8 = CLAS corrections 	
17 + n·16	U1	ionoModel	-	-	Ionospheric model used: <ul style="list-style-type: none"> • 0 = no model • 1 = Klobuchar model transmitted by GPS • 2 = SBAS model • 3 = Klobuchar model transmitted by BeiDou • 8 = Iono delay derived from dual frequency observations 	

18 + n·16	X2	sigFlags	-	-	Signal related flags
bits 1...0	U:2	health	-	-	Signal health flag: <ul style="list-style-type: none"> • 0 = unknown • 1 = healthy • 2 = unhealthy
bit 2	U:1	prSmoothed	-	-	1 = Pseudorange has been smoothed
bit 3	U:1	prUsed	-	-	1 = Pseudorange has been used for this signal
bit 4	U:1	crUsed	-	-	1 = Carrier range has been used for this signal
bit 5	U:1	doUsed	-	-	1 = Range rate (Doppler) has been used for this signal
bit 6	U:1	prCorrUsed	-	-	1 = Pseudorange corrections have been used for this signal
bit 7	U:1	crCorrUsed	-	-	1 = Carrier range corrections have been used for this signal
bit 8	U:1	doCorrUsed	-	-	1 = Range rate (Doppler) corrections have been used for this signal
20 + n·16	U1[4]	reserved1	-	-	Reserved

End of repeated group (numSigs times)

3.15.19 UBX-NAV-SLAS (0x01 0x42)

3.15.19.1 QZSS L1S SLAS status data

Message	UBX-NAV-SLAS					
	QZSS L1S SLAS status data					
Type	Periodic/pollled					
Comment	This message outputs the status of the QZSS L1S SLAS sub system					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x01	0x42	20 + cnt·8	see below	CK_A CK_B
<i>Payload description:</i>						
Byte offset	Type	Name	Scale	Unit	Description	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See the description of iTOW for details.	
4	U1	version	-	-	Message version (0x00 for this version)	
5	U1[3]	reserved0	-	-	Reserved	
8	I4	gmsLon	1e-3	deg	Longitude of the used ground monitoring station	
12	I4	gmsLat	1e-3	deg	Latitude of the used ground monitoring station	
16	U1	gmsCode	-	-	Code of the used ground monitoring station according to the QZSS SLAS Interface Specification, available from qzss.go.jp/en/	
17	U1	qzssSvId	-	-	Satellite identifier of the QZS/GEO whose correction data is used (see Satellite Numbering)	
18	X1	serviceFlags	-	-	Flags regarding SLAS service	
bit 0	U:1	gmsAvailable	-	-	1 = Ground monitoring station available	
bit 1	U:1	qzssSvAvailable	-	-	1 = Correction providing QZSS SV available	
bit 2	U:1	testMode	-	-	1 = Currently used QZSS SV in test mode	
19	U1	cnt	-	-	Number of pseudorange corrections following	

Start of repeated group (*cnt* times)

20 + n·8	U1	gnssId	-	-	GNSS identifier (see Satellite Numbering)
21 + n·8	U1	svId	-	-	Satellite identifier (see Satellite Numbering)
22 + n·8	U1	reserved1	-	-	Reserved
23 + n·8	U1[3]	reserved2	-	-	Reserved
26 + n·8	I2	prc	-	cm	Pseudorange correction

End of repeated group (*cnt* times)

3.15.20 UBX-NAV-STATUS (0x01 0x03)

3.15.20.1 Receiver navigation status

Message		UBX-NAV-STATUS				
		Receiver navigation status				
Type	Periodic/pollled					
Comment	See important comments concerning validity of position given in section Navigation output filters in the integration manual.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x01	0x03	16	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	U1	gpsFix	-	-	GPSfix Type, this value does not qualify a fix as valid and within the limits. See note on flag gpsFixOk below. <ul style="list-style-type: none"> 0x00 = no fix 0x01 = dead reckoning only 0x02 = 2D-fix 0x03 = 3D-fix 0x04 = GPS + dead reckoning combined 0x05 = Time only fix 0x06..0xff = reserved 	
5	X1	flags	-	-	Navigation Status Flags	
	bit 0	U:1	gpsFixOk	-	-	1 = position and velocity valid and within DOP and ACC Masks.
	bit 1	U:1	diffSoln	-	-	1 = differential corrections were applied
	bit 2	U:1	wknSet	-	-	1 = Week Number valid (see section Time validity in the integration manual for details)
	bit 3	U:1	towSet	-	-	1 = Time of Week valid (see section Time validity in the integration manual for details)
6	X1	fixStat	-	-	Fix Status Information	
	bit 0	U:1	diffCorr	-	-	1 = differential corrections available
	bit 1	U:1	carrSolnValid	-	-	1 = valid carrSoln
	bits 7...6	U:2	mapMatching	-	-	map matching status: <ul style="list-style-type: none"> 00: none 01: valid but not used, i.e. map matching data was received, but was too old 10: valid and used, map matching data was applied

- 11: valid and used, map matching data was applied. In case of sensor unavailability map matching data enables dead reckoning. This requires map matched latitude/longitude or heading data.

7	X1	flags2	-	-	further information about navigation output
bits 1...0	U:2	psmState	-	-	power save mode state (not supported for protocol versions less than 13.01) <ul style="list-style-type: none"> • 0 = ACQUISITION [or when psm disabled] • 1 = TRACKING • 2 = POWER OPTIMIZED TRACKING • 3 = INACTIVE
bits 4...3	U:2	spooofDetState	-	-	Spooofing detection state (not supported for protocol versions less than 18.00) <ul style="list-style-type: none"> • 0: Unknown or deactivated • 1: No spooofing indicated • 2: Spooofing indicated • 3: Multiple spooofing indications <p>Note that the spooofing state value only reflects the detector state for the current navigation epoch. As spooofing can be detected most easily at the transition from real signal to spooofing signal, this is also where the detector is triggered the most. I.e. a value of 1 - <i>No spooofing indicated</i> does not mean that the receiver is not spooofed, it simply states that the detector was not triggered in this epoch.</p>
bits 7...6	U:2	carrSoln	-	-	Carrier phase range solution status: <ul style="list-style-type: none"> • 0 = no carrier phase range solution • 1 = carrier phase range solution with floating ambiguities • 2 = carrier phase range solution with fixed ambiguities
8	U4	ttff	-	ms	Time to first fix (millisecond time tag)
12	U4	msss	-	ms	Milliseconds since Startup / Reset

3.15.21 UBX-NAV-TIMEBDS (0x01 0x24)

3.15.21.1 BeiDou time solution

Message	UBX-NAV-TIMEBDS BeiDou time solution					
Type	Periodic/pollled					
Comment	This message reports the precise BDS time of the most recent navigation solution including validity flags and an accuracy estimate.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x01	0x24	20	see below	CK_A CK_B
<i>Payload description:</i>						
Byte offset	Type	Name	Scale	Unit	Description	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	U4	SOW	-	s	BDS time of week (rounded to seconds)	

8	I4	fSOW	-	ns	Fractional part of SOW (range: +/-500000000). The precise BDS time of week in seconds is: $SOW + fSOW * 1e-9$	
12	I2	week	-	-	BDS week number of the navigation epoch	
14	I1	leapS	-	s	BDS leap seconds (BDS-UTC)	
15	X1	valid	-	-	Validity Flags	
	bit 0	U:1	sowValid	-	-	1 = Valid SOW and fSOW (see section Time validity in the integration manual for details)
	bit 1	U:1	weekValid	-	-	1 = Valid week (see section Time validity in the integration manual for details)
	bit 2	U:1	leapSValid	-	-	1 = Valid leap second
16	U4	tAcc	-	ns	Time Accuracy Estimate	

3.15.22 UBX-NAV-TIMEGAL (0x01 0x25)

3.15.22.1 Galileo time solution

Message	UBX-NAV-TIMEGAL Galileo time solution					
Type	Periodic/pollled					
Comment	This message reports the precise Galileo time of the most recent navigation solution including validity flags and an accuracy estimate.					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x01	0x25	20	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	U4	galTow	-	s	Galileo time of week (rounded to seconds)	
8	I4	fGalTow	-	ns	Fractional part of the Galileo time of week (range: +/-500000000). The precise Galileo time of week in seconds is: $galTow + fGalTow * 1e-9$	
12	I2	galWno	-	-	Galileo week number	
14	I1	leapS	-	s	Galileo leap seconds (Galileo-UTC)	
15	X1	valid	-	-	Validity Flags	
	bit 0	U:1	galTowValid	-	-	1 = Valid galTow and fGalTow (see section Time validity in the integration manual for details)
	bit 1	U:1	galWnoValid	-	-	1 = Valid galWno (see section Time validity in the integration manual for details)
	bit 2	U:1	leapSValid	-	-	1 = Valid leapS
16	U4	tAcc	-	ns	Time Accuracy Estimate	

3.15.23 UBX-NAV-TIMEGLO (0x01 0x23)

3.15.23.1 GLONASS time solution

Message	UBX-NAV-TIMEGLO					
	GLONASS time solution					
Type	Periodic/pollled					
Comment	This message reports the precise GLO time of the most recent navigation solution including validity flags and an accuracy estimate.					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x01	0x23	20	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	U4	TOD	-	s	GLONASS time of day (rounded to integer seconds)	
8	I4	fTOD	-	ns	Fractional part of TOD (range: +/-500000000). The precise GLONASS time of day in seconds is: $TOD + fTOD * 1e-9$	
12	U2	Nt	-	days	Current date (range: 1-1461), starting at 1 from the 1st Jan of the year indicated by N4 and ending at 1461 at the 31st Dec of the third year after that indicated by N4	
14	U1	N4	-	-	Four-year interval number starting from 1996 (1=1996, 2=2000, 3=2004...)	
15	X1	valid	-	-	Validity flags	
	bit 0	U:1	todValid	-	-	1 = Valid TOD and fTOD (see section Time validity in the integration manual for details)
	bit 1	U:1	dateValid	-	-	1 = Valid N4 and Nt (see section Time validity in the integration manual for details)
16	U4	tAcc	-	ns	Time Accuracy Estimate	

3.15.24 UBX-NAV-TIMEGPS (0x01 0x20)

3.15.24.1 GPS time solution

Message	UBX-NAV-TIMEGPS					
	GPS time solution					
Type	Periodic/pollled					
Comment	This message reports the precise GPS time of the most recent navigation solution including validity flags and an accuracy estimate.					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x01	0x20	16	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	I4	fTOW	-	ns	Fractional part of iTOW (range: +/-500000). The precise GPS time of week in seconds is: $(iTOW * 1e-3) + (fTOW * 1e-9)$	

8	I2	week	-	-	GPS week number of the navigation epoch	
10	I1	leapS	-	s	GPS leap seconds (GPS-UTC)	
11	X1	valid	-	-	Validity Flags	
	bit 0	U:1	towValid	-	-	1 = Valid GPS time of week (iTOW & fTOW, (see section Time validity in the integration manual for details)
	bit 1	U:1	weekValid	-	-	1 = Valid GPS week number (see section Time validity in the integration manual for details)
	bit 2	U:1	leapSValid	-	-	1 = Valid GPS leap seconds
12	U4	tAcc	-	ns	Time Accuracy Estimate	

3.15.25 UBX-NAV-TIMELS (0x01 0x26)

3.15.25.1 Leap second event information

Message	UBX-NAV-TIMELS					
	Leap second event information					
Type	Periodic/pollled					
Comment	Information about the upcoming leap second event if one is scheduled.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5	0x62	0x01	0x26	24	see below
						CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	U1	version	-	-	Message version (0x00 for this version)	
5	U1[3]	reserved0	-	-	Reserved	
8	U1	srcOfCurrLs	-	-	Information source for the current number of leap seconds. <ul style="list-style-type: none"> 0 = Default (hardcoded in the firmware, can be outdated) 1 = Derived from time difference between GPS and GLONASS time 2 = GPS 3 = SBAS 4 = BeiDou 5 = Galileo 6 = Aided data 7 = Configured 8 = NavIC 255 = Unknown 	
9	I1	currLs	-	s	Current number of leap seconds since start of GPS time (Jan 6, 1980). It reflects how much GPS time is ahead of UTC time. Galileo number of leap seconds is the same as GPS. BeiDou number of leap seconds is 14 less than GPS. GLONASS follows UTC time, so no leap seconds.	

10	U1	srcOfLsChange	-	-	Information source for the future leap second event. <ul style="list-style-type: none"> • 0 = No source • 2 = GPS • 3 = SBAS • 4 = BeiDou • 5 = Galileo • 6 = GLONASS • 7 = NavIC 	
11	I1	lsChange	-	s	Future leap second change if one is scheduled. +1 = positive leap second, -1 = negative leap second, 0 = no future leap second event scheduled or no information available.	
12	I4	timeToLsEvent	-	s	Number of seconds until the next leap second event, or from the last leap second event if no future event scheduled. If > 0 event is in the future, = 0 event is now, < 0 event is in the past. Valid only if validTimeToLsEvent = 1.	
16	U2	dateOfLsGps Wn	-	-	GPS week number (WN) of the next leap second event or the last one if no future event scheduled. Valid only if validTimeToLsEvent = 1.	
18	U2	dateOfLsGps Dn	-	-	GPS day of week number (DN) for the next leap second event or the last one if no future event scheduled. Valid only if validTimeToLsEvent = 1. (GPS and Galileo DN: from 1 = Sun to 7 = Sat. BeiDou DN: from 0 = Sun to 6 = Sat.)	
20	U1[3]	reserved1	-	-	Reserved	
23	X1	valid	-	-	Validity flags	
	bit 0	U:1	validCurrLs	-	-	1 = Valid current number of leap seconds value.
	bit 1	U:1	validTimeToLs Event	-	-	1 = Valid time to next leap second event or from the last leap second event if no future event scheduled.

3.15.26 UBX-NAV-TIMEQZSS (0x01 0x27)

3.15.26.1 QZSS time solution

Message	UBX-NAV-TIMEQZSS					
	QZSS time solution					
Type	Periodic/pollled					
Comment	This message reports the precise QZSS time of the most recent navigation solution including validity flags and an accuracy estimate. See the Clocks and time section in the integration manual for details.					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x01	0x27	20	see below	CK_A CK_B
Payload description:						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch.	
4	U4	qzssTow	-	s	QZSS time of week (rounded to seconds)	
8	I4	fQzssTow	-	ns	Fractional part of QZSS time of week (range: +/-500000000). The precise QZSS time of week in seconds is: $qzssTow + (fQzssTow * 1e-9)$	
12	I2	qzssWno	-	-	QZSS week number of the navigation epoch	

14	I1	leapS	-	s	QZSS leap seconds (QZSS-UTC)	
15	X1	valid	-	-	Validity Flags	
	bit 0	U:1	qzssTowValid	-	-	1 = Valid QZSS time of week (qzssTow and fQzssTow)
	bit 1	U:1	qzssWnoValid	-	-	1 = Valid QZSS week number
	bit 2	U:1	leapSValid	-	-	1 = Valid QZSS leap seconds
16	U4	tAcc	-	ns	Time Accuracy Estimate	

3.15.27 UBX-NAV-TIMEUTC (0x01 0x21)

3.15.27.1 UTC time solution

Message		UBX-NAV-TIMEUTC				
		UTC time solution				
<i>Type</i>	Periodic/pollled					
<i>Comment</i>	Note that during a leap second there may be more or less than 60 seconds in a minute. See the description of leap seconds in the integration manual for details.					
<i>Message structure</i>	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x01	0x21	20	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	U4	tAcc	-	ns	Time accuracy estimate (UTC)	
8	I4	nano	-	ns	Fraction of second, range -1e9 .. 1e9 (UTC)	
12	U2	year	-	y	Year, range 1999..2099 (UTC)	
14	U1	month	-	month	Month, range 1..12 (UTC)	
15	U1	day	-	d	Day of month, range 1..31 (UTC)	
16	U1	hour	-	h	Hour of day, range 0..23 (UTC)	
17	U1	min	-	min	Minute of hour, range 0..59 (UTC)	
18	U1	sec	-	s	Seconds of minute, range 0..60 (UTC)	
19	X1	valid	-	-	Validity Flags	
	bit 0	U:1	validTOW	-	-	1 = Valid Time of Week (see section Time validity in the integration manual for details)
	bit 1	U:1	validWKN	-	-	1 = Valid Week Number (see section Time validity in the integration manual for details)
	bit 2	U:1	validUTC	-	-	1 = Valid UTC Time
	bits 7...4	U:4	utcStandard	-	-	UTC standard identifier. (Not supported for protocol versions less than 15.00) <ul style="list-style-type: none"> • 0 = Information not available • 1 = Communications Research Laboratory (CRL), Tokyo, Japan • 2 = National Institute of Standards and Technology (NIST) • 3 = U.S. Naval Observatory (USNO) • 4 = International Bureau of Weights and Measures (BIPM) • 5 = European laboratories • 6 = Former Soviet Union (SU)

- 7 = National Time Service Center (NTSC), China
- 8 = National Physics Laboratory India (NPLI)
- 15 = Unknown

3.15.28 UBX-NAV-VELECEF (0x01 0x11)

3.15.28.1 Velocity solution in ECEF

Message	UBX-NAV-VELECEF					
	Velocity solution in ECEF					
Type	Periodic/pollled					
Comment	See important comments concerning validity of position given in section Navigation output filters in the integration manual.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x01	0x11	20	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	I4	ecefVX	-	cm/s	ECEF X velocity	
8	I4	ecefVY	-	cm/s	ECEF Y velocity	
12	I4	ecefVZ	-	cm/s	ECEF Z velocity	
16	U4	sAcc	-	cm/s	Speed accuracy estimate	

3.15.29 UBX-NAV-VELNED (0x01 0x12)

3.15.29.1 Velocity solution in NED frame

Message	UBX-NAV-VELNED					
	Velocity solution in NED frame					
Type	Periodic/pollled					
Comment	See important comments concerning validity of position given in section Navigation output filters in the integration manual.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x01	0x12	36	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U4	iTOW	-	ms	GPS time of week of the navigation epoch. See section iTOW timestamps in the integration manual for details.	
4	I4	velN	-	cm/s	North velocity component	
8	I4	velE	-	cm/s	East velocity component	
12	I4	velD	-	cm/s	Down velocity component	
16	U4	speed	-	cm/s	Speed (3-D)	
20	U4	gSpeed	-	cm/s	Ground speed (2-D)	
24	I4	heading	1e-5	deg	Heading of motion 2-D	
28	U4	sAcc	-	cm/s	Speed accuracy Estimate	

32 U4 cAcc 1e-5 deg Course / Heading accuracy estimate

3.16 UBX-RXM (0x02)

The messages in the UBX-RXM class are used to output status and result data from the receiver manager as well as sending commands to the receiver manager.

3.16.1 UBX-RXM-COR (0x02 0x34)

3.16.1.1 Differential correction input status

Message		UBX-RXM-COR				
		Differential correction input status				
<i>Type</i>	Output					
<i>Comment</i>	This message shows information on received differential correction input messages. It is output upon successful parsing of a differential correction input message, irrespective of whether the parsed message is supported/used by the receiver.					
<i>Message structure</i>	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x02	0x34	12	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	version	-	-	Message version (0x01 for this version)	
1	U1[3]	reserved0	-	-	Reserved	
4	X4	statusInfo	-	-	Message input status information	
bits 4...0	U:5	protocol	-	-	Input correction data protocol: <ul style="list-style-type: none"> 0: Unknown 1: RTCM3 2: SPARTN (Safe Position Augmentation for Real Time Navigation) 30: UBX-RXM-QZSSL6 	
bits 6...5	U:2	errStatus	-	-	Error status of the received correction message content based on possibly available error codes or checksums: <ul style="list-style-type: none"> 0: Unknown 1: Error-free 2: Erroneous 	
bits 8...7	U:2	msgUsed	-	-	Status of receiver using the input message: <ul style="list-style-type: none"> 0: Unknown 1: Not used 2: Used 	
bits 24...9	U:16	correctionId	-	-	Identifier for the correction stream: <ul style="list-style-type: none"> For RTCM 3: Reference station ID (DF003) of the received RTCM input message. Valid range 0-4095. Reported only for the standard RTCM messages that include the DF003 field and for the u-blox proprietary RTCM messages 4072.x. For all other messages, reports 0xFFFF. For other correction types 0xFFFF. 	
bit 25	U:1	msgTypeValid	-	-	Validity of the msgType field. Set to False e.g. if the protocol does not define msgType.	
bit 26	U:1	msgSubTypeValid	-	-	Validity of the msgSubType field. Set to False e.g. if the protocol does not define subtype for the msgType.	

bit 27	U:1	msgInputHandle	-	-	0=Receiver does not have input handling support for this message, 1=Receiver has input handling support for this message. Input handling support does not necessitate that message is supported/used by the receiver.
8	U2	msgType	-	-	Message type
10	U2	msgSubType	-	-	Message subtype

3.16.2 UBX-RXM-MEASX (0x02 0x14)

3.16.2.1 Satellite measurements for RRLP

Message	UBX-RXM-MEASX					
	Satellite measurements for RRLP					
Type	Periodic/pollled					
Comment	<p>The message payload data is, where possible and appropriate, according to the Radio Resource LCS (Location Services) Protocol (RRLP) [1]. One exception is the satellite and GNSS IDs, which here are given according to the Satellite Numbering scheme. The correct satellites have to be selected and their satellite ID translated accordingly [1, tab. A.10.14] for use in a RRLP Measure Position Response Component. Similarly, the measurement reference time of week has to be forwarded correctly (modulo 14400000 for the 24 LSB GPS measurements variant, modulo 3600000 for the 22 LSB Galileo and Additional Navigation Satellite Systems (GANSS) measurements variant) of the RRLP measure position response to the SMLC.</p> <p>Reference: [1] ETSI TS 144 031 V11.0.0 (2012-10), Digital cellular telecommunications system (Phase 2+), Location Services (LCS), Mobile Station (MS) - Serving Mobile Location Centre (SMLC), Radio Resource LCS Protocol (RRLP), (3GPP TS 44.031 version 11.0.0 Release 11).</p>					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x02	0x14	44 + numSV*24	see below	CK_A CK_B
Payload description:						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	version	-	-	Message version, currently 0x01	
1	U1[3]	reserved0	-	-	Reserved	
4	U4	gpsTOW	-	ms	GPS measurement reference time	
8	U4	gloTOW	-	ms	GLONASS measurement reference time	
12	U4	bdsTOW	-	ms	BeiDou measurement reference time	
16	U1[4]	reserved1	-	-	Reserved	
20	U4	qzssTOW	-	ms	QZSS measurement reference time	
24	U2	gpsTOWacc	2 ⁻⁴	ms	GPS measurement reference time accuracy (0xffff = > 4s)	
26	U2	gloTOWacc	2 ⁻⁴	ms	GLONASS measurement reference time accuracy (0xffff = > 4s)	
28	U2	bdsTOWacc	2 ⁻⁴	ms	BeiDou measurement reference time accuracy (0xffff = > 4s)	
30	U1[2]	reserved2	-	-	Reserved	
32	U2	qzssTOWacc	2 ⁻⁴	ms	QZSS measurement reference time accuracy (0xffff = > 4s)	
34	U1	numSV	-	-	Number of satellites in repeated block	
35	U1	flags	-	-	Flags	
bits 1...0	U:2	towSet	-	-	TOW set (0 = no, 1 or 2 = yes)	
36	U1[8]	reserved3	-	-	Reserved	

Start of repeated group (*numSV* times)

44 + n·24	U1	gnssId	-	-	GNSS ID (see Satellite Numbering)
45 + n·24	U1	svId	-	-	Satellite ID (see Satellite Numbering)
46 + n·24	U1	cNo	-	-	carrier noise ratio (0..63)
47 + n·24	U1	mpathIndic	-	-	multipath index (according to [1]) (0 = not measured, 1 = low, 2 = medium, 3 = high)
48 + n·24	I4	dopplerMS	0.04	m/s	Doppler measurement
52 + n·24	I4	dopplerHz	0.2	Hz	Doppler measurement
56 + n·24	U2	wholeChips	-	-	whole value of the code phase measurement (0..1022 for GPS)
58 + n·24	U2	fracChips	-	-	fractional value of the code phase measurement (0..1023)
60 + n·24	U4	codePhase	2 ⁻²¹	ms	Code phase
64 + n·24	U1	intCodePhase	-	ms	Integer (part of the) code phase
65 + n·24	U1	pseuRangeRMS Err	-	-	pseudorange RMS error index (according to [1]) (0..63)
66 + n·24	U1[2]	reserved4	-	-	Reserved

End of repeated group (*numSV* times)

3.16.3 UBX-RXM-PMREQ (0x02 0x41)

3.16.3.1 Power management request

Message	UBX-RXM-PMREQ Power management request					
Type	Command					
Comment	This message requests a power management related task of the receiver.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x02	0x41	8	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U4	duration	-	ms	Duration of the requested task, set to zero for infinite duration. The maximum supported time is 12 days.	
4	X4	flags	-	-	task flags	
bit 1	U ₁	backup	-	-	The receiver goes into backup mode for a time period defined by duration, provided that it is not connected to USB	

3.16.3.2 Power management request

Message	UBX-RXM-PMREQ Power management request					
Type	Command					
Comment	This message requests a power management related task of the receiver.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x02	0x41	16	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	

0	U1	version	-	-	Message version (0x00 for this version)	
1	U1[3]	reserved0	-	-	Reserved	
4	U4	duration	-	ms	Duration of the requested task, set to zero for infinite duration. The maximum supported time is 12 days.	
8	X4	flags	-	-	task flags	
	bit 1	U:1	backup	-	-	The receiver goes into backup mode for a time period defined by duration, provided that it is not connected to USB
	bit 2	U:1	force	-	-	Force receiver backup while USB is connected. USB interface will be disabled.
12	X4	wakeupSources	-	-	Configure pins to wake up the receiver. The receiver wakes up if there is either a falling or a rising edge on one of the configured pins.	
	bit 3	U:1	uartrx	-	-	Wake up the receiver if there is an edge on the UART RX pin
	bit 5	U:1	extint0	-	-	Wake up the receiver if there is an edge on the EXTINT0 pin
	bit 6	U:1	extint1	-	-	Wake up the receiver if there is an edge on the EXTINT1 pin
	bit 7	U:1	spics	-	-	Wake up the receiver if there is an edge on the SPI CS pin

3.16.4 UBX-RXM-RAWX (0x02 0x15)

3.16.4.1 Multi-GNSS raw measurements

Message	UBX-RXM-RAWX Multi-GNSS raw measurements					
Type	Periodic/pollled					
Comment	This message contains the information needed to be able to generate a RINEX 3 multi-GNSS observation file (see ftp://ftp.igs.org/pub/data/format/). This message contains pseudorange, Doppler, carrier phase, phase lock and signal quality information for GNSS satellites once signals have been synchronized. This message supports all active GNSS. The only difference between this version of the message and the previous version (UBX-RXM-RAWX-DATA0) is the addition of the version field.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x02	0x15	16 + numMeas*32	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	R8	rcvTow	-	s	Measurement time of week in receiver local time approximately aligned to the GPS time system. The receiver local time of week, week number and leap second information can be used to translate the time to other time systems. More information about the difference in time systems can be found in the RINEX 3 format documentation. For a receiver operating in GLONASS only mode, UTC time can be determined by subtracting the leapS field from GPS time regardless of whether the GPS leap seconds are valid.	
8	U2	week	-	weeks	GPS week number in receiver local time.	

10	I1	leapS	-	s	GPS leap seconds (GPS-UTC). This field represents the receiver's best knowledge of the leap seconds offset. A flag is given in the recStat bitfield to indicate if the leap seconds are known.	
11	U1	numMeas	-	-	Number of measurements to follow	
12	X1	recStat	-	-	Receiver tracking status bitfield	
	bit 0	U _{:1}	leapSec	-	-	Leap seconds have been determined
	bit 1	U _{:1}	clkReset	-	-	Clock reset applied. Typically the receiver clock is changed in increments of integer milliseconds.
13	U1	version	-	-	Message version (0x01 for this version)	
14	U1[2]	reserved0	-	-	Reserved	
<i>Start of repeated group (numMeas times)</i>						
16 + n·32	R8	prMes	-	m	Pseudorange measurement [m]. GLONASS inter frequency channel delays are compensated with an internal calibration table.	
24 + n·32	R8	cpMes	-	cycles	Carrier phase measurement [cycles]. The carrier phase initial ambiguity is initialized using an approximate value to make the magnitude of the phase close to the pseudorange measurement. Clock resets are applied to both phase and code measurements in accordance with the RINEX specification.	
32 + n·32	R4	doMes	-	Hz	Doppler measurement (positive sign for approaching satellites) [Hz]	
36 + n·32	U1	gnssId	-	-	GNSS identifier (see Satellite Numbering for a list of identifiers)	
37 + n·32	U1	svId	-	-	Satellite identifier (see Satellite Numbering)	
38 + n·32	U1	sigId	-	-	New style signal identifier (see Signal Identifiers). (not supported for protocol versions less than 27.00)	
39 + n·32	U1	freqId	-	-	Only used for GLONASS: This is the frequency slot + 7 (range from 0 to 13)	
40 + n·32	U2	locktime	-	ms	Carrier phase locktime counter (maximum 64500ms)	
42 + n·32	U1	cno	-	dBHz	Carrier-to-noise density ratio (signal strength) [dB-Hz]	
43 + n·32	X1	prStddev	0.01*2 ⁿ	m	Estimated pseudorange measurement standard deviation	
	bits 3...0	U _{:4}	prStd	-	-	Estimated pseudorange standard deviation
44 + n·32	X1	cpStddev	0.004	cycles	Estimated carrier phase measurement standard deviation (note a raw value of 0x0F indicates the value is invalid)	
	bits 3...0	U _{:4}	cpStd	-	-	Estimated carrier phase standard deviation
45 + n·32	X1	doStddev	0.002*2 ⁿ	Hz	Estimated Doppler measurement standard deviation.	
	bits 3...0	U _{:4}	doStd	-	-	Estimated Doppler standard deviation
46 + n·32	X1	trkStat	-	-	Tracking status bitfield	
	bit 0	U _{:1}	prValid	-	-	Pseudorange valid
	bit 1	U _{:1}	cpValid	-	-	Carrier phase valid
	bit 2	U _{:1}	halfCyc	-	-	Half cycle valid
	bit 3	U _{:1}	subHalfCyc	-	-	Half cycle subtracted from phase
47 + n·32	U1	reserved1	-	-	Reserved	

End of repeated group (*numMeas* times)

3.16.5 UBX-RXM-RLM (0x02 0x59)

3.16.5.1 Galileo SAR short-RLM report

Message	UBX-RXM-RLM Galileo SAR short-RLM report					
Type	Output					
Comment	This message contains the contents of any Galileo Search and Rescue (SAR) Short Return Link Message detected by the receiver.					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x02	0x59	16	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	version	-	-	Message version (0x00 for this version)	
1	U1	type	-	-	Message type (0x01 for Short-RLM)	
2	U1	svId	-	-	Identifier of transmitting satellite (see Satellite Numbering)	
3	U1	reserved0	-	-	Reserved	
4	U1[8]	beacon	-	-	Beacon identifier (60 bits), with bytes ordered by earliest transmitted (most significant) first. Top four bits of first byte are zero.	
12	U1	message	-	-	Message code (4 bits)	
13	U1[2]	params	-	-	Parameters (16 bits), with bytes ordered by earliest transmitted (most significant) first.	
15	U1	reserved1	-	-	Reserved	

3.16.5.2 Galileo SAR long-RLM report

Message	UBX-RXM-RLM Galileo SAR long-RLM report					
Type	Output					
Comment	This message contains the contents of any Galileo Search and Rescue (SAR) Long Return Link Message detected by the receiver.					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x02	0x59	28	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	version	-	-	Message version (0x00 for this version)	
1	U1	type	-	-	Message type (0x02 for Long-RLM)	
2	U1	svId	-	-	Identifier of transmitting satellite (see Satellite Numbering)	
3	U1	reserved0	-	-	Reserved	
4	U1[8]	beacon	-	-	Beacon identifier (60 bits), with bytes ordered by earliest transmitted (most significant) first. Top four bits of first byte are zero.	
12	U1	message	-	-	Message code (4 bits)	

13	U1[12]	params	-	-	Parameters (96 bits), with bytes ordered by earliest transmitted (most significant) first.
25	U1[3]	reserved1	-	-	Reserved

3.16.6 UBX-RXM-RTCM (0x02 0x32)

3.16.6.1 RTCM input status

Message		UBX-RXM-RTCM RTCM input status				
Type	Output					
Comment	This message shows info on a received RTCM input message. It is output upon successful parsing of an RTCM input message, irrespective of whether the RTCM message is supported or not by the receiver.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x02	0x32	8	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U1	version	-	-	Message version (0x02 for this version)	
1	X1	flags	-	-	RTCM input status flags	
	bit 0	U:1	crcFailed	-	-	0 when RTCM message received and passed CRC check, 1 when failed, in which case refStation and msgType might be corrupted and misleading
	bits 2...1	U:2	msgUsed	-	-	2 = RTCM message used successfully by the receiver, 1 = not used, 0 = do not know
2	U2	subType	-	-	Message subtype, only applicable to u-blox proprietary RTCM message 4072 (not available on all products)	
4	U2	refStation	-	-	Reference station ID: <ul style="list-style-type: none"> For RTCM 2.3: Reference station ID of the received RTCM 2 input message. Valid range 0-1023. For RTCM 3.3: Reference station ID (DF003) of the received RTCM input message. Valid range 0-4095. Reported only for the standard RTCM messages that include the DF003 field and for the u-blox proprietary RTCM messages 4072.x. For all other messages, reports 0xFFFF. 	
6	U2	msgType	-	-	Message type	

3.16.7 UBX-RXM-SPARTN (0x02 0x33)

3.16.7.1 SPARTN input status

Message		UBX-RXM-SPARTN SPARTN input status				
Type	Output					
Comment	This message shows info on a received SPARTN input message. It is output upon successful parsing of a SPARTN input message, irrespective of whether the SPARTN message is supported or not by the receiver.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x02	0x33	8	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U1	version	-	-	Message version (0x01 for this version)	

1	X1	flags	-	-	SPARTN input status flags
bits 2...1	U:2	msgUsed	-	-	2 = SPARTN message used successfully by the receiver, 1 = not used, 0 = do not know
2	U2	subType	-	-	Message subtype
4	U1[2]	reserved0	-	-	Reserved
6	U2	msgType	-	-	Message type

3.17 UBX-SEC (0x27)

The messages in the UBX-SEC class are used for security features of the receiver.

3.17.1 UBX-SEC-SIG (0x27 0x09)

3.17.1.1 Signal security information

Message	UBX-SEC-SIG					
	Signal security information					
<i>Type</i>	Periodic/pollled					
<i>Comment</i>	Information related to the security, i.e. availability and integrity, of the signals.					
<i>Message structure</i>	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x27	0x09	12	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	version	-	-	Message version (0x01 for this version)	
1	U1[3]	reserved0	-	-	Reserved	
4	X1	jamFlags	-	-	Information related to jamming/interference	
bit 0	U:1	jamDetEnabled	-	-	Flag indicates whether jamming/interference detection is enabled	
bits 2...1	U:2	jammingState	-	-	Jamming/interference state <ul style="list-style-type: none"> 0: Unknown 1: No jamming indicated 2: Warning; jamming indicated but fix OK 3: Critical; jamming indicated and no fix 	
5	U1[3]	reserved1	-	-	Reserved	
8	X1	spfFlags	-	-	Information related to GNSS spoofing	
bit 0	U:1	spfDetEnabled	-	-	Flag indicates whether spoofing detection is enabled	
bits 3...1	U:3	spoofingState	-	-	Spoofing state <ul style="list-style-type: none"> 0: Unknown 1: No spoofing indicated 2: Spoofing indicated 3: Spoofing affirmed <p>Note that the spoofing state value only reflects the detector state for the current navigation epoch. I.e. a value of 1: <i>No spoofing indicated</i> does not mean that the receiver is not spoofed, it simply states that the detector was not triggered in this epoch.</p>	
9	U1[3]	reserved2	-	-	Reserved	

3.17.2 UBX-SEC-UNIQID (0x27 0x03)

3.17.2.1 Unique chip ID

Message		UBX-SEC-UNIQID					Unique chip ID	
Type	Output							
Comment	This message is used to retrieve a unique chip identifier (40 bits, 5 bytes).							
Message structure	Header	Class	ID	Length (Bytes)	Payload		Checksum	
	0xb5 0x62	0x27	0x03	9	see below		CK_A CK_B	
<i>Payload description:</i>								
Byte offset	Type	Name	Scale	Unit	Description			
0	U1	version	-	-	Message version (0x01 for this version)			
1	U1[3]	reserved0	-	-	Reserved			
4	U1[5]	uniqueId	-	-	Unique chip ID			

3.18 UBX-TIM (0x0d)

The messages in the UBX-TIM class are used to output timing information from the receiver, such as time pulse and time mark measurements.

3.18.1 UBX-TIM-TM2 (0x0d 0x03)

3.18.1.1 Time mark data

Message		UBX-TIM-TM2					Time mark data	
Type	Periodic/pollled							
Comment	This message contains information for high precision time stamping / pulse counting. The delay figures and timebase given in CFG-TP Configuration Items are also applied to the time results output in this message.							
Message structure	Header	Class	ID	Length (Bytes)	Payload		Checksum	
	0xb5 0x62	0x0d	0x03	28	see below		CK_A CK_B	
<i>Payload description:</i>								
Byte offset	Type	Name	Scale	Unit	Description			
0	U1	ch	-	-	Channel (i.e. EXTINT) upon which the pulse was measured			
1	X1	flags	-	-	Bitmask			
bit 0	U:1	mode	-	-	<ul style="list-style-type: none"> 0=single 1=running 			
bit 1	U:1	run	-	-	<ul style="list-style-type: none"> 0=armed 1=stopped 			
bit 2	U:1	newFallingEdge	-	-	New falling edge detected			
bits 4...3	U:2	timeBase	-	-	<ul style="list-style-type: none"> 0=Time base is Receiver time 1=Time base is GNSS time (the system according to the configuration in CFG-TP Configuration Items for tpldx=0) 2=Time base is UTC (the variant according to the configuration in CFG-NAVSPG-* configuration items) 			
bit 5	U:1	utc	-	-	<ul style="list-style-type: none"> 0=UTC not available 1=UTC available 			
bit 6	U:1	time	-	-	<ul style="list-style-type: none"> 0=Time is not valid 			

Bit	Type	Field Name	Scale	Unit	Description
bit 7	U:1	newRisingEdge	-	-	New rising edge detected
2	U2	count	-	-	Rising edge counter
4	U2	wnR	-	-	Week number of last rising edge
6	U2	wnF	-	-	Week number of last falling edge
8	U4	towMsR	-	ms	Tow of rising edge
12	U4	towSubMsR	-	ns	Millisecond fraction of tow of rising edge in nanoseconds
16	U4	towMsF	-	ms	Tow of falling edge
20	U4	towSubMsF	-	ns	Millisecond fraction of tow of falling edge in nanoseconds
24	U4	accEst	-	ns	Accuracy estimate

- 1=Time is valid (Valid GNSS fix)

3.18.2 UBX-TIM-TP (0x0d 0x01)

3.18.2.1 Time pulse time data

Message	UBX-TIM-TP					
Type	Time pulse time data					
Type	Periodic/pollled					
Comment	This message contains information on the timing of the next pulse at the TIMEPULSE0 output. The recommended configuration when using this message is to set both the measurement rate (CFG-RATE) and the timepulse frequency (CFG-TP) to 1 Hz.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x0d	0x01	16	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	U4	towMS	-	ms	Time pulse time of week according to time base	
4	U4	towSubMS	2 ⁻³²	ms	Submillisecond part of towMS	
8	I4	qErr	-	ps	Quantization error of time pulse	
12	U2	week	-	weeks	Time pulse week number according to time base	
14	X1	flags	-	-	Flags	
bit 0	U:1	timeBase	-	-	<ul style="list-style-type: none"> • 0 = Time base is GNSS • 1 = Time base is UTC 	
bit 1	U:1	utc	-	-	<ul style="list-style-type: none"> • 0 = UTC not available • 1 = UTC available 	
bits 3...2	U:2	raim	-	-	(T)RAIM information <ul style="list-style-type: none"> • 0 = Information not available • 1 = Not active • 2 = Active 	
bit 4	U:1	qErrInvalid	-	-	<ul style="list-style-type: none"> • 0 = Quantization error valid • 1 = Quantization error invalid 	
15	X1	refInfo	-	-	Time reference information	
bits 3...0	U:4	timeRefGnss	-	-	GNSS reference information. Only valid if time base is GNSS (timeBase=0). <ul style="list-style-type: none"> • 0 = GPS • 1 = GLONASS • 2 = BeiDou • 3 = Galileo 	

bits 7...4	U:4	utcStandard	-	-	<ul style="list-style-type: none"> • 4 = NavIC • 15 = Unknown
					UTC standard identifier. Only valid if time base is UTC (timeBase=1). <ul style="list-style-type: none"> • 0 = Information not available • 1 = Communications Research Laboratory (CRL), Tokyo, Japan • 2 = National Institute of Standards and Technology (NIST) • 3 = U.S. Naval Observatory (USNO) • 4 = International Bureau of Weights and Measures (BIPM) • 5 = European laboratories • 6 = Former Soviet Union (SU) • 7 = National Time Service Center (NTSC), China • 8 = National Physics Laboratory India (NPLI) • 15 = Unknown

3.18.3 UBXTIMVRFY (0x0d 0x06)

3.18.3.1 Sourced time verification

Message	UBXTIMVRFY					
	Sourced time verification					
Type	Periodic/pollled					
Comment	This message contains verification information about previous time received via assistance data or from RTC.					
Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x0d	0x06	20	see below	CK_A CK_B
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	I4	itow	-	ms	integer millisecond tow received by source	
4	I4	frac	-	ns	sub-millisecond part of tow	
8	I4	deltaMs	-	ms	integer milliseconds of delta time (current time minus sourced time)	
12	I4	deltaNs	-	ns	Sub-millisecond part of delta time	
16	U2	wno	-	week	Week number	
18	X1	flags	-	-	Flags	
	bits 2...0	U:3	src	-	-	Aiding time source <ul style="list-style-type: none"> • 0 = no time aiding done • 2 = source was RTC • 3 = source was assistance data
19	U1	reserved0	-	-	Reserved	

3.19 UBXTUPD (0x09)

The messages in the UBXTUPD class are used to download a firmware to the receiver and to update the firmware on the flash.

3.19.1 UBXTUPD-SOS (0x09 0x14)

3.19.1.1 Poll backup restore status

Message	UBX-UPD-SOS					
	Poll backup restore status					
Type	Poll request					
Comment	Sending this (empty) message to the receiver results in the receiver returning a <i>System restored from backup</i> message as defined below.					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x09	0x14	0	see below	CK_A CK_B
Payload	This message has no payload.					

3.19.1.2 Create backup in flash

Message	UBX-UPD-SOS					
	Create backup in flash					
Type	Command					
Comment	The host can send this message in order to save part of the battery-backed memory (BBR) in a file in the flash file system. The feature is designed in order to emulate the presence of the backup battery even if it is not present; the host can issue the save on shutdown command before switching off the device supply. It is recommended to issue a GNSS stop command using UBX-CFG-RST before in order to keep the BBR memory content consistent.					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x09	0x14	4	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	cmd	-	-	Command (must be 0)	
1	U1[3]	reserved0	-	-	Reserved	

3.19.1.3 Clear backup in flash

Message	UBX-UPD-SOS					
	Clear backup in flash					
Type	Command					
Comment	The host can send this message in order to erase the backup file present in flash. It is recommended that the clear operation is issued after the host has received the notification that the memory has been restored after a reset. Alternatively the host can parse the startup string <i>Restored data saved on shutdown</i> or poll the UBX-UPD-SOS message for obtaining the status.					
Message structure	<i>Header</i>	<i>Class</i>	<i>ID</i>	<i>Length (Bytes)</i>	<i>Payload</i>	<i>Checksum</i>
	0xb5 0x62	0x09	0x14	4	see below	CK_A CK_B
<i>Payload description:</i>						
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>	
0	U1	cmd	-	-	Command (must be 1)	
1	U1[3]	reserved0	-	-	Reserved	

3.19.1.4 Backup creation acknowledge

Message	UBX-UPD-SOS					
	Backup creation acknowledge					
Type	Output					
Comment	The message is sent from the device as confirmation of creation of a backup file in flash. The host can safely shut down the device after having received this message.					

Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x09	0x14	8	see below	CK_A CK_B

Payload description:

Byte offset	Type	Name	Scale	Unit	Description
0	U1	cmd	-	-	Command (must be 2)
1	U1[3]	reserved0	-	-	Reserved
4	U1	response	-	-	<ul style="list-style-type: none"> 0 = Not acknowledged 1 = Acknowledged
5	U1[3]	reserved1	-	-	Reserved

3.19.1.5 System restored from backup

Message	UBX-UPD-SOS
	System restored from backup

Type	Output
------	--------

Comment The message is sent from the device to notify the host the BBR has been restored from a backup file in the flash file system. The host should clear the backup file after receiving this message. If the UBX-UPD-SOS message is polled, this message will be resent.

Message structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xb5 0x62	0x09	0x14	8	see below	CK_A CK_B

Payload description:

Byte offset	Type	Name	Scale	Unit	Description
0	U1	cmd	-	-	Command (must be 3)
1	U1[3]	reserved0	-	-	Reserved
4	U1	response	-	-	<ul style="list-style-type: none"> 0 = Unknown 1 = Failed restoring from backup 2 = Restored from backup 3 = Not restored (no backup)
5	U1[3]	reserved1	-	-	Reserved

4 RTCM protocol

4.1 RTCM introduction

The RTCM (Radio Technical Commission for Maritime Services) protocols are used to supply the GNSS receiver with real-time differential correction data. The RTCM protocol specifications are available from <http://www.rtcmm.org>.

The RTCM 3.x support is implemented according to *RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3*.

4.2 RTCM 3.x configuration

The configuration of RTCM 3.x input or RTCM 3.x output (if available) is further detailed in the integration manual for typical applications.

The RTCM 3.x protocol can be disabled/enabled on communication interfaces using the [Configuration interface](#), for example configuration item [CFG-UART1INPROT-RTCM3X](#).

4.3 RTCM messages overview

Message	Class/ID	Description (Type)
RTCM-3X – RTCM 3.3 messages		
RTCM-3X-TYPE1001	0xf5 0x01	Message type 1001 <ul style="list-style-type: none"> L1-only GPS RTK observables (Input)
RTCM-3X-TYPE1002	0xf5 0x02	Message type 1002 <ul style="list-style-type: none"> Extended L1-only GPS RTK observables (Input)
RTCM-3X-TYPE1003	0xf5 0x03	Message type 1003 <ul style="list-style-type: none"> L1/L2 GPS RTK observables (Input)
RTCM-3X-TYPE1004	0xf5 0x04	Message type 1004 <ul style="list-style-type: none"> Extended L1/L2 GPS RTK observables (Input)
RTCM-3X-TYPE1005	0xf5 0x05	Message type 1005 <ul style="list-style-type: none"> Stationary RTK reference station ARP (Input)
RTCM-3X-TYPE1006	0xf5 0x06	Message type 1006 <ul style="list-style-type: none"> Stationary RTK reference station ARP with antenna height (Input)
RTCM-3X-TYPE1007	0xf5 0x07	Message type 1007 <ul style="list-style-type: none"> Antenna descriptor (Input)
RTCM-3X-TYPE1009	0xf5 0x09	Message type 1009 <ul style="list-style-type: none"> L1-only GLONASS RTK observables (Input)
RTCM-3X-TYPE1010	0xf5 0x0a	Message type 1010 <ul style="list-style-type: none"> Extended L1-Only GLONASS RTK observables (Input)
RTCM-3X-TYPE1011	0xf5 0xa1	Message type 1011 <ul style="list-style-type: none"> L1&L2 GLONASS RTK observables (Input)
RTCM-3X-TYPE1012	0xf5 0xa2	Message type 1012 <ul style="list-style-type: none"> Extended L1&L2 GLONASS RTK observables (Input)
RTCM-3X-TYPE1033	0xf5 0x21	Message type 1033 <ul style="list-style-type: none"> Receiver and antenna descriptors (Input)
RTCM-3X-TYPE1074	0xf5 0x4a	Message type 1074 <ul style="list-style-type: none"> GPS MSM4 (Input)
RTCM-3X-TYPE1075	0xf5 0x4b	Message type 1075 <ul style="list-style-type: none"> GPS MSM5 (Input)

Message	Class/ID	Description (Type)
RTCM-3X-TYPE1077	0xf5 0x4d	Message type 1077 <ul style="list-style-type: none"> GPS MSM7 (Input)
RTCM-3X-TYPE1084	0xf5 0x54	Message type 1084 <ul style="list-style-type: none"> GLONASS MSM4 (Input)
RTCM-3X-TYPE1085	0xf5 0x55	Message type 1085 <ul style="list-style-type: none"> GLONASS MSM5 (Input)
RTCM-3X-TYPE1087	0xf5 0x57	Message type 1087 <ul style="list-style-type: none"> GLONASS MSM7 (Input)
RTCM-3X-TYPE1094	0xf5 0x5e	Message type 1094 <ul style="list-style-type: none"> Galileo MSM4 (Input)
RTCM-3X-TYPE1095	0xf5 0x5f	Message type 1095 <ul style="list-style-type: none"> Galileo MSM5 (Input)
RTCM-3X-TYPE1097	0xf5 0x61	Message type 1097 <ul style="list-style-type: none"> Galileo MSM7 (Input)
RTCM-3X-TYPE1124	0xf5 0x7c	Message type 1124 <ul style="list-style-type: none"> BeiDou MSM4 (Input)
RTCM-3X-TYPE1125	0xf5 0x7d	Message type 1125 <ul style="list-style-type: none"> BeiDou MSM5 (Input)
RTCM-3X-TYPE1127	0xf5 0x7f	Message type 1127 <ul style="list-style-type: none"> BeiDou MSM7 (Input)
RTCM-3X-TYPE1230	0xf5 0xe6	Message type 1230 <ul style="list-style-type: none"> GLONASS L1 and L2 code-phase biases (Input)

4.4 RTCM 3.3 messages

For details see [RTCM protocol](#) and the RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 available from <http://www.rtc.org>.

4.4.1 Message type 1001

4.4.1.1 L1-only GPS RTK observables

Message	RTCM-3X-TYPE1001 L1-only GPS RTK observables				
Type	Input				
Comment	See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.				
Information	Class/ID: 0xf5 0x01, Message Type: 1001 (0x3e9), Message Size: 6 + nData				
Payload description:					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
bits 7...0	U ₈	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1
bits 1...0	U ₂	nDataMSB	-	-	Payload length (2 MSB)
bits 7...2	U ₆	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
bits 7...0	U ₈	nData	-	-	Payload length (8 LSB)

Start of repeated group (nData times)

3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
-------	----	------	---	---	---

End of repeated group (nData times)

3 + nData	U1[3]	crc	-	-	Checksum
-----------	-------	-----	---	---	----------

4.4.2 Message type 1002

4.4.2.1 Extended L1-only GPS RTK observables

Message	RTCM-3X-TYPE1002 Extended L1-only GPS RTK observables				
Type	Input				
Comment	See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.				
Information	Class/ID: 0xf5 0x02, Message Type: 1002 (0x3ea), Message Size: 6 + nData				
<i>Payload description:</i>					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1
bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
bits 7...2	U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
<i>Start of repeated group (nData times)</i>					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
<i>End of repeated group (nData times)</i>					
3 + nData	U1[3]	crc	-	-	Checksum

4.4.3 Message type 1003

4.4.3.1 L1/L2 GPS RTK observables

Message	RTCM-3X-TYPE1003 L1/L2 GPS RTK observables				
Type	Input				
Comment	See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.				
Information	Class/ID: 0xf5 0x03, Message Type: 1003 (0x3eb), Message Size: 6 + nData				
<i>Payload description:</i>					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1

	bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
	bits 7...2	U:6	res1	-	-	Reserved, all zero
2		X1	rtcmByte2	-	-	RTCM frame byte 2
	bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
<i>Start of repeated group (nData times)</i>						
3 + n		U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
<i>End of repeated group (nData times)</i>						
3 + nData		U1[3]	crc	-	-	Checksum

4.4.4 Message type 1004

4.4.4.1 Extended L1/L2 GPS RTK observables

Message	RTCM-3X-TYPE 1004 Extended L1/L2 GPS RTK observables					
Type	Input					
Comment	See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.					
Information	Class/ID: 0xf5 0x04, Message Type: 1004 (0x3ec), Message Size: 6 + nData					
<i>Payload description:</i>						
Byte offset	Type	Name	Scale	Unit	Description	
0	X1	rtcmByte0	-	-	RTCM frame byte 0	
	bits 7...0	U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1	
	bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
	bits 7...2	U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2	
	bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
<i>Start of repeated group (nData times)</i>						
3 + n		U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
<i>End of repeated group (nData times)</i>						
3 + nData		U1[3]	crc	-	-	Checksum

4.4.5 Message type 1005

4.4.5.1 Stationary RTK reference station ARP

Message	RTCM-3X-TYPE 1005 Stationary RTK reference station ARP					
Type	Input					
Comment	See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.					
Information	Class/ID: 0xf5 0x05, Message Type: 1005 (0x3ed), Message Size: 6 + nData					
<i>Payload description:</i>						

Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1
bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
bits 7...2	U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
<i>Start of repeated group (nData times)</i>					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
<i>End of repeated group (nData times)</i>					
3 + nData	U1[3]	crc	-	-	Checksum

4.4.6 Message type 1006

4.4.6.1 Stationary RTK reference station ARP with antenna height

Message	RTCM-3X-TYPE1006 Stationary RTK reference station ARP with antenna height				
Type	Input				
Comment	See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.				
Information	Class/ID: 0xf5 0x06, Message Type: 1006 (0x3ee), Message Size: 6 + nData				
<i>Payload description:</i>					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1
bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
bits 7...2	U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
<i>Start of repeated group (nData times)</i>					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
<i>End of repeated group (nData times)</i>					
3 + nData	U1[3]	crc	-	-	Checksum

4.4.7 Message type 1007

4.4.7.1 Antenna descriptor

Message	RTCM-3X-TYPE1007 Antenna descriptor				
Type	Input				
Comment	See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.				
Information	Class/ID: 0xf5 0x07, Message Type: 1007 (0x3ef), Message Size: 6 + nData				
Payload description:					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
	bits 7...0 U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1
	bits 1...0 U:2	nDataMSB	-	-	Payload length (2 MSB)
	bits 7...2 U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
	bits 7...0 U:8	nData	-	-	Payload length (8 LSB)
Start of repeated group (nData times)					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
End of repeated group (nData times)					
3 + nData	U1[3]	crc	-	-	Checksum

4.4.8 Message type 1009

4.4.8.1 L1-only GLONASS RTK observables

Message	RTCM-3X-TYPE1009 L1-only GLONASS RTK observables				
Type	Input				
Comment	See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.				
Information	Class/ID: 0xf5 0x09, Message Type: 1009 (0x3f1), Message Size: 6 + nData				
Payload description:					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
	bits 7...0 U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1
	bits 1...0 U:2	nDataMSB	-	-	Payload length (2 MSB)
	bits 7...2 U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
	bits 7...0 U:8	nData	-	-	Payload length (8 LSB)
Start of repeated group (nData times)					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.

End of repeated group (*nData* times)

3 + nData	U1[3]	crc	-	-	Checksum
-----------	-------	-----	---	---	----------

4.4.9 Message type 1010

4.4.9.1 Extended L1-Only GLONASS RTK observables

Message		RTCM-3X-TYPE1010 Extended L1-Only GLONASS RTK observables				
Type	Input					
Comment	See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.					
Information	Class/ID: 0xf5 0x0a, Message Type: 1010 (0x3f2), Message Size: 6 + nData					
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	X1	rtcmByte0	-	-	RTCM frame byte 0	
	bits 7...0	U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1	
	bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
	bits 7...2	U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2	
	bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
Start of repeated group (<i>nData</i> times)						
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.	
End of repeated group (<i>nData</i> times)						
3 + nData	U1[3]	crc	-	-	Checksum	

4.4.10 Message type 1011

4.4.10.1 L1&L2 GLONASS RTK observables

Message		RTCM-3X-TYPE1011 L1&L2 GLONASS RTK observables				
Type	Input					
Comment	See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.					
Information	Class/ID: 0xf5 0xa1, Message Type: 1011 (0x3f3), Message Size: 6 + nData					
Payload description:						
Byte offset	Type	Name	Scale	Unit	Description	
0	X1	rtcmByte0	-	-	RTCM frame byte 0	
	bits 7...0	U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1	
	bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
	bits 7...2	U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2	

bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
<i>Start of repeated group (nData times)</i>					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
<i>End of repeated group (nData times)</i>					
3 + nData	U1[3]	crc	-	-	Checksum

4.4.11 Message type 1012

4.4.11.1 Extended L1&L2 GLONASS RTK observables

Message	RTCM-3X-TYPE1012 Extended L1&L2 GLONASS RTK observables				
Type	Input				
Comment	See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.				
Information	Class/ID: 0xf5 0xa2, Message Type: 1012 (0x3f4), Message Size: 6 + nData				
<i>Payload description:</i>					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1
bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
bits 7...2	U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
<i>Start of repeated group (nData times)</i>					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
<i>End of repeated group (nData times)</i>					
3 + nData	U1[3]	crc	-	-	Checksum

4.4.12 Message type 1033

4.4.12.1 Receiver and antenna descriptors

Message	RTCM-3X-TYPE1033 Receiver and antenna descriptors				
Type	Input				
Comment	See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.				
Information	Class/ID: 0xf5 0x21, Message Type: 1033 (0x409), Message Size: 6 + nData				
<i>Payload description:</i>					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0xd3)

1	X1	rtcmByte1	-	-	RTCM frame byte 1
bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
bits 7...2	U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
<i>Start of repeated group (nData times)</i>					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
<i>End of repeated group (nData times)</i>					
3 + nData	U1[3]	crc	-	-	Checksum

4.4.13 Message type 1074

4.4.13.1 GPS MSM4

Message	RTCM-3X-TYPE1074 GPS MSM4				
Type	Input				
Comment	Full GPS Pseudoranges and PhaseRanges plus CNR See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.				
Information	Class/ID: 0xf5 0x4a, Message Type: 1074 (0x432), Message Size: 6 + nData				
<i>Payload description:</i>					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1
bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
bits 7...2	U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
<i>Start of repeated group (nData times)</i>					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
<i>End of repeated group (nData times)</i>					
3 + nData	U1[3]	crc	-	-	Checksum

4.4.14 Message type 1075

4.4.14.1 GPS MSM5

Message	RTCM-3X-TYPE1075 GPS MSM5				
Type	Input				
Comment	Full GPS Pseudoranges, PhaseRanges, PhaseRangeRate and CNR				

See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.

Information Class/ID: 0xf5 0x4b, Message Type: 1075 (0x433), Message Size: 6 + nData

Payload description:

Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1
bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
bits 7...2	U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
Start of repeated group (nData times)					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
End of repeated group (nData times)					
3 + nData	U1[3]	crc	-	-	Checksum

4.4.15 Message type 1077

4.4.15.1 GPS MSM7

Message RTCM-3X-TYPE1077
GPS MSM7

Type Input

Comment Full GPS Pseudoranges, PhaseRanges, PhaseRangeRate and CNR (high resolution)
See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.

Information Class/ID: 0xf5 0x4d, Message Type: 1077 (0x435), Message Size: 6 + nData

Payload description:

Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1
bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
bits 7...2	U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
Start of repeated group (nData times)					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
End of repeated group (nData times)					

3 + nData	U1[3]	crc	-	-	Checksum
-----------	-------	-----	---	---	----------

4.4.16 Message type 1084

4.4.16.1 GLONASS MSM4

Message	RTCM-3X-TYPE1084 GLONASS MSM4				
Type	Input				
Comment	Full GLONASS Pseudoranges and PhaseRanges plus CNR See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.				
Information	Class/ID: 0xf5 0x54, Message Type: 1084 (0x43c), Message Size: 6 + nData				
<i>Payload description:</i>					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1
bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
bits 7...2	U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
<i>Start of repeated group (nData times)</i>					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
<i>End of repeated group (nData times)</i>					
3 + nData	U1[3]	crc	-	-	Checksum

4.4.17 Message type 1085

4.4.17.1 GLONASS MSM5

Message	RTCM-3X-TYPE1085 GLONASS MSM5				
Type	Input				
Comment	Full GLONASS Pseudoranges, PhaseRanges, PhaseRangeRate and CNR See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.				
Information	Class/ID: 0xf5 0x55, Message Type: 1085 (0x43d), Message Size: 6 + nData				
<i>Payload description:</i>					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1
bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
bits 7...2	U:6	res1	-	-	Reserved, all zero

2	X1	rtcmByte2	-	-	RTCM frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
<i>Start of repeated group (nData times)</i>					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
<i>End of repeated group (nData times)</i>					
3 + nData	U1[3]	crc	-	-	Checksum

4.4.18 Message type 1087

4.4.18.1 GLONASS MSM7

Message	RTCM-3X-TYPE1087 GLONASS MSM7				
Type	Input				
Comment	Full GLONASS Pseudoranges, PhaseRanges, PhaseRangeRate and CNR (high resolution) See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.				
Information	Class/ID: 0xf5 0x57, Message Type: 1087 (0x43f), Message Size: 6 + nData				
<i>Payload description:</i>					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1
bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
bits 7...2	U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
<i>Start of repeated group (nData times)</i>					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
<i>End of repeated group (nData times)</i>					
3 + nData	U1[3]	crc	-	-	Checksum

4.4.19 Message type 1094

4.4.19.1 Galileo MSM4

Message	RTCM-3X-TYPE1094 Galileo MSM4				
Type	Input				
Comment	Full Galileo Pseudoranges and PhaseRanges plus CNR See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.				
Information	Class/ID: 0xf5 0x5e, Message Type: 1094 (0x446), Message Size: 6 + nData				
<i>Payload description:</i>					

Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1
bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
bits 7...2	U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
<i>Start of repeated group (nData times)</i>					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
<i>End of repeated group (nData times)</i>					
3 + nData	U1[3]	crc	-	-	Checksum

4.4.20 Message type 1095

4.4.20.1 Galileo MSM5

Message	RTCM-3X-TYPE1095 Galileo MSM5				
Type	Input				
Comment	Full Galileo Pseudoranges, PhaseRanges, PhaseRangeRate and CNR See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.				
Information	Class/ID: 0xf5 0x5f, Message Type: 1095 (0x447), Message Size: 6 + nData				
<i>Payload description:</i>					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1
bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
bits 7...2	U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
<i>Start of repeated group (nData times)</i>					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
<i>End of repeated group (nData times)</i>					
3 + nData	U1[3]	crc	-	-	Checksum

4.4.21 Message type 1097

4.4.21.1 Galileo MSM7

Message	RTCM-3X-TYPE1097 Galileo MSM7				
Type	Input				
Comment	Full Galileo Pseudoranges, PhaseRanges, PhaseRangeRate and CNR (high resolution) See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.				
Information	Class/ID: 0xf5 0x61, Message Type: 1097 (0x449), Message Size: 6 + nData				
Payload description:					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1
bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
bits 7...2	U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
Start of repeated group (nData times)					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
End of repeated group (nData times)					
3 + nData	U1[3]	crc	-	-	Checksum

4.4.22 Message type 1124

4.4.22.1 BeiDou MSM4

Message	RTCM-3X-TYPE1124 BeiDou MSM4				
Type	Input				
Comment	Full BeiDou Pseudoranges and PhaseRanges plus CNR See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.				
Information	Class/ID: 0xf5 0x7c, Message Type: 1124 (0x464), Message Size: 6 + nData				
Payload description:					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1
bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
bits 7...2	U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
Start of repeated group (nData times)					

3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
-------	----	------	---	---	---

End of repeated group (*nData* times)

3 + nData	U1[3]	crc	-	-	Checksum
-----------	-------	-----	---	---	----------

4.4.23 Message type 1125

4.4.23.1 BeiDou MSM5

Message	RTCM-3X-TYPE1125 BeiDou MSM5				
Type	Input				
Comment	Full BeiDou Pseudoranges, PhaseRanges, PhaseRangeRate and CNR See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.				
Information	Class/ID: 0xf5 0x7d, Message Type: 1125 (0x465), Message Size: 6 + nData				
Payload description:					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
	bits 7...0	U:8	preamble	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1
	bits 1...0	U:2	nDataMSB	-	Payload length (2 MSB)
	bits 7...2	U:6	res1	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
	bits 7...0	U:8	nData	-	Payload length (8 LSB)
Start of repeated group (<i>nData</i> times)					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
End of repeated group (<i>nData</i> times)					
3 + nData	U1[3]	crc	-	-	Checksum

4.4.24 Message type 1127

4.4.24.1 BeiDou MSM7

Message	RTCM-3X-TYPE1127 BeiDou MSM7				
Type	Input				
Comment	Full BeiDou pseudoranges, PhaseRanges, PhaseRangeRate and CNR (high resolution) See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.				
Information	Class/ID: 0xf5 0x7f, Message Type: 1127 (0x467), Message Size: 6 + nData				
Payload description:					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
	bits 7...0	U:8	preamble	-	Preamble (0xd3)

1	X1	rtcmByte1	-	-	RTCM frame byte 1
bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
bits 7...2	U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
<i>Start of repeated group (nData times)</i>					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
<i>End of repeated group (nData times)</i>					
3 + nData	U1[3]	crc	-	-	Checksum

4.4.25 Message type 1230

4.4.25.1 GLONASS L1 and L2 code-phase biases

Message	RTCM-3X-TYPE1230 GLONASS L1 and L2 code-phase biases				
Type	Input				
Comment	See RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3 for a detailed message specification.				
Information	Class/ID: 0xf5 0xe6, Message Type: 1230 (0x4ce), Message Size: 6 + nData				
<i>Payload description:</i>					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	rtcmByte0	-	-	RTCM frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0xd3)
1	X1	rtcmByte1	-	-	RTCM frame byte 1
bits 1...0	U:2	nDataMSB	-	-	Payload length (2 MSB)
bits 7...2	U:6	res1	-	-	Reserved, all zero
2	X1	rtcmByte2	-	-	RTCM frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (8 LSB)
<i>Start of repeated group (nData times)</i>					
3 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB and nData to form a 10-bit value.
<i>End of repeated group (nData times)</i>					
3 + nData	U1[3]	crc	-	-	Checksum

5 SPARTN protocol

5.1 SPARTN introduction

The SPARTN (Safe Position Augmentation for Real-Time Navigation) protocols are used to supply the GNSS receiver with real-time correction data. The SPARTN protocol specifications are available in spartnformat.org.

The SPARTN 1.8 support is implemented according to *Safe Position Augmentation for Real-Time Navigation (SPARTN) Interface Control Document, Version 1.8.0, January 2020*.

The SPARTN 2.0 support is implemented according to *Safe Position Augmentation for Real-Time Navigation (SPARTN) Interface Control Document, Version 2.0, December 2020*.

5.2 SPARTN configuration

The configuration of SPARTN input is further detailed in the integration manual for typical applications.

The SPARTN protocol can be disabled/enabled on communication interfaces using the [Configuration interface](#), for example configuration item [CFG-UART1INPROT-SPARTN](#).

5.3 SPARTN messages overview

Message	Class/ID	Description (Type)
SPARTN-1X – SPARTN messages		
SPARTN-1X-OCB_GPS	0xf6 0x01	Message type 0, sub-type 0 <ul style="list-style-type: none"> GPS orbit, clock, bias (OCB) (Input)
SPARTN-1X-OCB_GLO	0xf6 0x02	Message type 0, sub-type 1 <ul style="list-style-type: none"> GLONASS orbit, clock, bias (OCB) (Input)
SPARTN-1X-HPAC_GPS	0xf6 0x0a	Message type 1, sub-type 0 <ul style="list-style-type: none"> GPS high-precision atmosphere correction (HPAC) (Input)
SPARTN-1X-HPAC_GLO	0xf6 0x0b	Message type 1, sub-type 1 <ul style="list-style-type: none"> GLONASS high-precision atmosphere correction (HPAC) (Input)
SPARTN-1X-GAD	0xf6 0x13	Message type 2, sub-type 0 <ul style="list-style-type: none"> Geographic area definition (GAD) (Input)

5.4 SPARTN messages

For details see [SPARTN protocol](#) and the *Safe Position Augmentation for Real-Time Navigation (SPARTN) Interface Control Document, Version 1.8.0, January 2020* or the *Safe Position Augmentation for Real-Time Navigation (SPARTN) Interface Control Document, Version 2.0, December 2020* available from <https://www.sapcorda.com/>.

5.4.1 Message type 0, sub-type 0

5.4.1.1 GPS orbit, clock, bias (OCB)

Message	SPARTN-1X-OCB_GPS GPS orbit, clock, bias (OCB)
Type	Input
Comment	This message carries the data for GPS satellite orbits, clocks, biases and other auxiliary information.

See Safe Position Augmentation for Real-Time Navigation (SPARTN) Interface Control Document, Version 1.8.0, January 2020 or Safe Position Augmentation for Real-Time Navigation (SPARTN) Interface Control Document, Version 2.0, December 2020 for a detailed message specification.

<i>Information</i> Class/ID: 0xf6 0x01, Message Type: 0 (0x00), Sub-type: 0 (0x0), Message Size: 5 + nData + crcType					
<i>Payload description:</i>					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	spartnByte0	-	-	SPARTN frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0x73, 's')
1	X1	spartnByte1	-	-	SPARTN frame byte 1
bit 0	U:1	nDataMSB	-	-	Payload length (MSB)
bits 7...1	U:7	msgType	-	-	Message type
2	X1	spartnByte2	-	-	SPARTN frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (middle 8 bits)
3	X1	spartnByte3	-	-	SPARTN frame byte 3
bits 3...0	U:4	frameCrc	-	-	Frame CRC
bits 5...4	U:2	crcType	-	-	Message CRC type
bit 6	U:1	eaf	-	-	Encryption and/or authentication flag
bit 7	U:1	nDataLSB	-	-	Payload length (LSB)
<i>Start of repeated group (nData times)</i>					
4 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB, nData and nDataLSB to form a 10-bit value.
<i>End of repeated group (nData times)</i>					
4 + nData	U1	crc0	-	-	Message CRC 1st byte
<i>Start of repeated group (crcType times)</i>					
5 + nData + n	U1	crcN	-	-	Message CRC additional bytes
<i>End of repeated group (crcType times)</i>					

5.4.2 Message type 0, sub-type 1

5.4.2.1 GLONASS orbit, clock, bias (OCB)

Message		SPARTN-1X-OCB_GLO GLONASS orbit, clock, bias (OCB)			
Type	Input				
Comment	This message carries the data for GLONASS satellite orbits, clocks, biases and other auxiliary information. See Safe Position Augmentation for Real-Time Navigation (SPARTN) Interface Control Document, Version 1.8.0, January 2020 or Safe Position Augmentation for Real-Time Navigation (SPARTN) Interface Control Document, Version 2.0, December 2020 for a detailed message specification.				
<i>Information</i> Class/ID: 0xf6 0x02, Message Type: 0 (0x00), Sub-type: 1 (0x1), Message Size: 5 + nData + crcType					
<i>Payload description:</i>					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	spartnByte0	-	-	SPARTN frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0x73, 's')
1	X1	spartnByte1	-	-	SPARTN frame byte 1
bit 0	U:1	nDataMSB	-	-	Payload length (MSB)

	bits 7...1	U:7	msgType	-	-	Message type
2		X1	spartnByte2	-	-	SPARTN frame byte 2
	bits 7...0	U:8	nData	-	-	Payload length (middle 8 bits)
3		X1	spartnByte3	-	-	SPARTN frame byte 3
	bits 3...0	U:4	frameCrc	-	-	Frame CRC
	bits 5...4	U:2	crcType	-	-	Message CRC type
	bit 6	U:1	eaf	-	-	Encryption and/or authentication flag
	bit 7	U:1	nDataLSB	-	-	Payload length (LSB)
<i>Start of repeated group (nData times)</i>						
4 + n		U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB, nData and nDataLSB to form a 10-bit value.
<i>End of repeated group (nData times)</i>						
4 + nData		U1	crc0	-	-	Message CRC 1st byte
<i>Start of repeated group (crcType times)</i>						
5 + nData + n		U1	crcN	-	-	Message CRC additional bytes
<i>End of repeated group (crcType times)</i>						

5.4.3 Message type 1, sub-type 0

5.4.3.1 GPS high-precision atmosphere correction (HPAC)

Message	SPARTN-1X-HPAC_GPS GPS high-precision atmosphere correction (HPAC)				
Type	Input				
Comment	This message contains high-precision atmosphere data, specifically ionospheric and tropospheric correction data. Both ionosphere and troposphere data are transmitted in the same message. See Safe Position Augmentation for Real-Time Navigation (SPARTN) Interface Control Document, Version 1.8.0, January 2020 or Safe Position Augmentation for Real-Time Navigation (SPARTN) Interface Control Document, Version 2.0, December 2020 for a detailed message specification.				
Information	<i>Class/ID: 0xf6 0x0a, Message Type: 1 (0x01), Sub-type: 0 (0x0), Message Size: 5 + nData + crcType</i>				
<i>Payload description:</i>					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	spartnByte0	-	-	SPARTN frame byte 0
	bits 7...0	U:8	preamble	-	Preamble (0x73, 's')
1	X1	spartnByte1	-	-	SPARTN frame byte 1
	bit 0	U:1	nDataMSB	-	Payload length (MSB)
	bits 7...1	U:7	msgType	-	Message type
2	X1	spartnByte2	-	-	SPARTN frame byte 2
	bits 7...0	U:8	nData	-	Payload length (middle 8 bits)
3	X1	spartnByte3	-	-	SPARTN frame byte 3
	bits 3...0	U:4	frameCrc	-	Frame CRC
	bits 5...4	U:2	crcType	-	Message CRC type
	bit 6	U:1	eaf	-	Encryption and/or authentication flag
	bit 7	U:1	nDataLSB	-	Payload length (LSB)
<i>Start of repeated group (nData times)</i>					

4 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB, nData and nDataLSB to form a 10-bit value.
<i>End of repeated group (nData times)</i>					
4 + nData	U1	crc0	-	-	Message CRC 1st byte
<i>Start of repeated group (crcType times)</i>					
5 + nData + n	U1	crcN	-	-	Message CRC additional bytes
<i>End of repeated group (crcType times)</i>					

5.4.4 Message type 1, sub-type 1

5.4.4.1 GLONASS high-precision atmosphere correction (HPAC)

Message	SPARTN-1X-HPAC_GLO GLONASS high-precision atmosphere correction (HPAC)				
Type	Input				
Comment	This message contains high-precision atmosphere data, specifically ionospheric and tropospheric correction data. Both ionosphere and troposphere data are transmitted in the same message. See Safe Position Augmentation for Real-Time Navigation (SPARTN) Interface Control Document, Version 1.8.0, January 2020 or Safe Position Augmentation for Real-Time Navigation (SPARTN) Interface Control Document, Version 2.0, December 2020 for a detailed message specification.				
Information	Class/ID: 0xf6 0x0b, Message Type: 1 (0x01), Sub-type: 1 (0x1), Message Size: 5 + nData + crcType				
<i>Payload description:</i>					
Byte offset	Type	Name	Scale	Unit	Description
0	X1	spartnByte0	-	-	SPARTN frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0x73, 's')
1	X1	spartnByte1	-	-	SPARTN frame byte 1
bit 0	U:1	nDataMSB	-	-	Payload length (MSB)
bits 7...1	U:7	msgType	-	-	Message type
2	X1	spartnByte2	-	-	SPARTN frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (middle 8 bits)
3	X1	spartnByte3	-	-	SPARTN frame byte 3
bits 3...0	U:4	frameCrc	-	-	Frame CRC
bits 5...4	U:2	crcType	-	-	Message CRC type
bit 6	U:1	eaf	-	-	Encryption and/or authentication flag
bit 7	U:1	nDataLSB	-	-	Payload length (LSB)
<i>Start of repeated group (nData times)</i>					
4 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB, nData and nDataLSB to form a 10-bit value.
<i>End of repeated group (nData times)</i>					
4 + nData	U1	crc0	-	-	Message CRC 1st byte
<i>Start of repeated group (crcType times)</i>					
5 + nData + n	U1	crcN	-	-	Message CRC additional bytes

End of repeated group (*crcType* times)

5.4.5 Message type 2, sub-type 0

5.4.5.1 Geographic area definition (GAD)

Message		SPARTN-1X-GAD			
		Geographic area definition (GAD)			
<i>Type</i>	Input				
<i>Comment</i>	<p>This message is used to define geographic areas of data usage. The use of this message can serve different purposes, including atmospheric data availability and other types of geographical/geometrical aspects of usage of data.</p> <p>See Safe Position Augmentation for Real-Time Navigation (SPARTN) Interface Control Document, Version 1.8.0, January 2020 or Safe Position Augmentation for Real-Time Navigation (SPARTN) Interface Control Document, Version 2.0, December 2020 for a detailed message specification.</p>				
<i>Information</i>	Class/ID: 0xf6 0x13, Message Type: 2 (0x02), Sub-type: 0 (0x0), Message Size: 5 + nData + crcType				
<i>Payload description:</i>					
<i>Byte offset</i>	<i>Type</i>	<i>Name</i>	<i>Scale</i>	<i>Unit</i>	<i>Description</i>
0	X1	spartnByte0	-	-	SPARTN frame byte 0
bits 7...0	U:8	preamble	-	-	Preamble (0x73, 's')
1	X1	spartnByte1	-	-	SPARTN frame byte 1
bit 0	U:1	nDataMSB	-	-	Payload length (MSB)
bits 7...1	U:7	msgType	-	-	Message type
2	X1	spartnByte2	-	-	SPARTN frame byte 2
bits 7...0	U:8	nData	-	-	Payload length (middle 8 bits)
3	X1	spartnByte3	-	-	SPARTN frame byte 3
bits 3...0	U:4	frameCrc	-	-	Frame CRC
bits 5...4	U:2	crcType	-	-	Message CRC type
bit 6	U:1	eaf	-	-	Encryption and/or authentication flag
bit 7	U:1	nDataLSB	-	-	Payload length (LSB)
<i>Start of repeated group (nData times)</i>					
4 + n	U1	data	-	-	Message payload data. Payload data length defined by combining nDataMSB, nData and nDataLSB to form a 10-bit value.
<i>End of repeated group (nData times)</i>					
4 + nData	U1	crc0	-	-	Message CRC 1st byte
<i>Start of repeated group (crcType times)</i>					
5 + nData + n	U1	crcN	-	-	Message CRC additional bytes
<i>End of repeated group (crcType times)</i>					

6 Configuration interface


This chapter describes the receiver configuration interface.

6.1 Configuration database

The configuration database in the receiver's RAM holds the current configuration, which is used by the receiver at run-time. It is constructed on startup of the receiver from several sources of configuration. These sources are called *Configuration Layers*. The current configuration is called the *RAM Layer*. Any configuration in any layer is organized as *Configuration Items*, where each Configuration Item is referenced to by a unique *Configuration Key ID* and holds a single *Configuration Value*.

6.2 Configuration items

The following figure shows the structure of a *Configuration Item*, which consists of a (*Configuration*) *Key ID* and its (*Configuration*) *Value*:

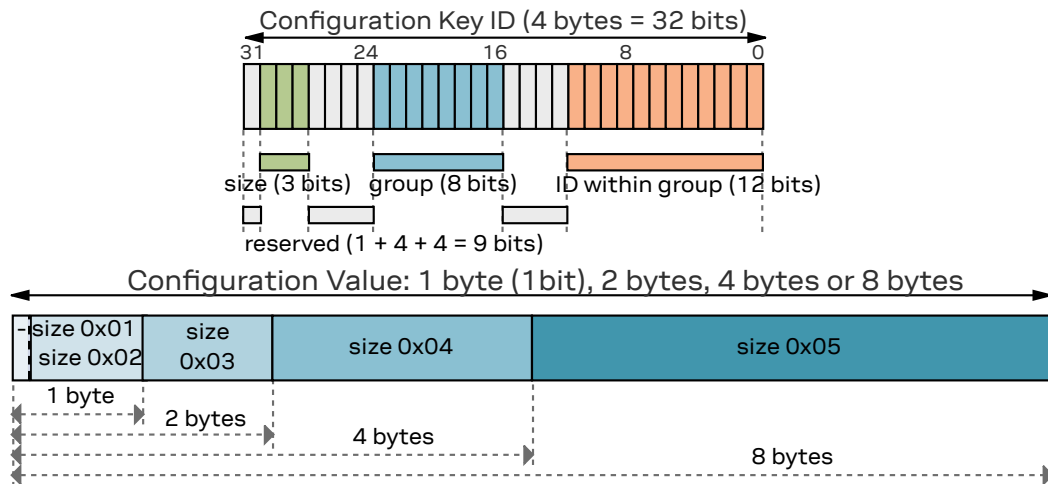

A Configuration Key ID is a 32-bit integer value, which is split into the following parts:

- Bit 31: Currently unused. Reserved for future use.
- Bits 30...28: Three bits that indicate the storage size of a Configuration Value (range 0x01-0x05, see below)
- Bits 27...24: Currently unused. Reserved for future use.
- Bits 23...16: Eight bits that define a unique group ID (range 0x01-0xfe)
- Bits 15...12: Currently unused. Reserved for future use.
- Bits 11...0: Twelve bits that define a unique item ID within a group (range 0x001-0xffe)

The entire 32-bit value is the unique Key ID, which uniquely identifies a particular item. The numeric representation of the Key ID uses the lower-case hexadecimal format, such as `0x20c400a1`. An easier, more readable text representation uses the form `CFG-GROUP-ITEM`. This is also referred to as the (*Configuration*) *Key Name*.

Supported storage size identifiers (bits 30...28 of the Key ID) are:

- 0x01: one bit (the actual storage used is one byte, but only the least significant bit is used)
- 0x02: one byte
- 0x03: two bytes
- 0x04: four bytes

- 0x05: eight bytes

Each Configuration Item is of a certain type, which defines the interpretation of the raw binary data (see also [UBX data types](#)):

- U1, U2, U4, U8: unsigned little-endian integers of 8-, 16-, 32- and 64-bit widths
- I1, I2, I4, I8: signed little-endian, two's complement integers of 8-, 16-, 32- and 64-bit widths
- R4, R8: IEEE 754 single (32-bit) and double (64-bit) precision floats
- E1, E2, E4: unsigned little-endian enumeration of 8-, 16-, and 32-bit widths
- X1, X2, X4, X8: unsigned little-endian integers of 8-, 16-, 32- and 64-bit widths for bitfields and other binary data, such as strings
- L: single-bit boolean (true = 1, false = 0), stored as U1


6.3 Configuration layers

Several *Configuration Layers* exist. They are separate sources of Configuration Items. Some of the layers are read-only and others are modifiable. Layers are organized in terms of priority. Values in a high-priority layer will replace values stored in low-priority layer. On startup of the receiver all configuration layers are read and the items within each layer are stacked up in order to create the *Current Configuration*, which is used by the receiver at run-time.

The following configuration layers are available (in order of priority, highest priority first):

- **RAM:** This layer contains items stored in volatile RAM. This is the Current Configuration. The value of any item can be set by the user at run-time (see [UBX protocol interface](#)) and it will become effective immediately.
- **BBR:** This layer contains items stored in the battery-backed RAM. The contents in this layer are preserved as long as a battery backup supply is provided during off periods. The value of any item can be set by the user at run-time (see [UBX protocol interface](#)) and it will become effective upon a restart of the receiver.
- **Flash:** This layer contains items stored permanently in the external flash memory. This layer is only available if there is a usable external flash memory. The value of any item can be set by the user at run-time (see [UBX protocol interface](#)) and it will become effective upon a restart of the receiver.
- **Default:** This layer contains all items known to the running receiver software and their hard-coded default values. Data in this layer is not writable.

The stacking of the configuration items from the different layers (sources) in order to construct the Current Configuration in the RAM Layer is depicted in the following figure. For each defined item, i.e. for each item in the Default Layer, the receiver software goes through the layers above and stacks all the found items on top. Some items may not be present in every layer. The result is the RAM Layer filled with all configuration items given Configuration Values coming from the highest priority layer the corresponding item was present. In the example figure below bold text indicates the source of the value in the Current Configuration (the RAM Layer). Empty boxes mean that the layer can hold the item but that it is not currently stored there. Boxes with text mean that an item is currently stored in the layer.

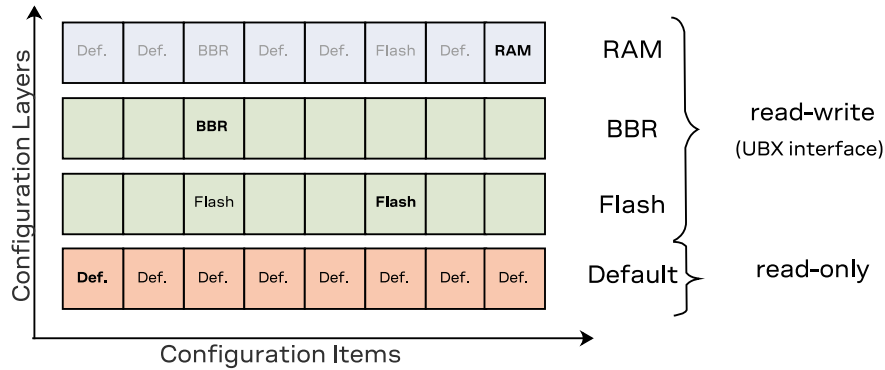

In the example figure above several items (e.g. the first item) are only set in the Default Layer and hence the default value ends up in Current Configuration in the RAM Layer. The third item is present in the Default, Flash and BBR Layers. The value from the BBR Layer has the highest priority and therefore it ends up in the RAM Layer. On the other hand, the default value of the sixth item is changed by the value in the Flash Layer. The value of the last item is changed in the RAM Layer only, i.e. upon startup the value in the RAM Layer was the value from the Default Layer, but the user has changed the value in the RAM Layer at run-time.

6.4 Configuration interface access

The following sections describe the existing interfaces to access the Configuration Database.

6.4.1 UBX protocol interface


The following [UBX protocol](#) messages are available to access the Configuration Database:

- [UBX-CFG-VALGET](#) to read configuration items from the database
- [UBX-CFG-VALSET](#) to set configuration items in the database
- [UBX-CFG-VALDEL](#) to delete configuration items from the database

6.5 Configuration data

Configuration data is the binary representation of a list of Key ID and Value pairs. It is formed by concatenating keys (U4 values) and values (variable type) without any padding. This format is used in the [UBX-CFG-VALSET](#) and [UBX-CFG-VALGET](#) messages.

The figure below shows an example. The four Items (Key ID - Value pairs) on the left use the four fundamental storage sizes: one byte (L, U1, I1, E1 and X1 types), 2 bytes (U2, I2, E2 and X2 types), four byte (U4, I4, E4, X4 and R4 types) and eight bytes (U8, I8, X8 and R8 types). When concatenated (right) the Key IDs and Values are not aligned and there is no padding.

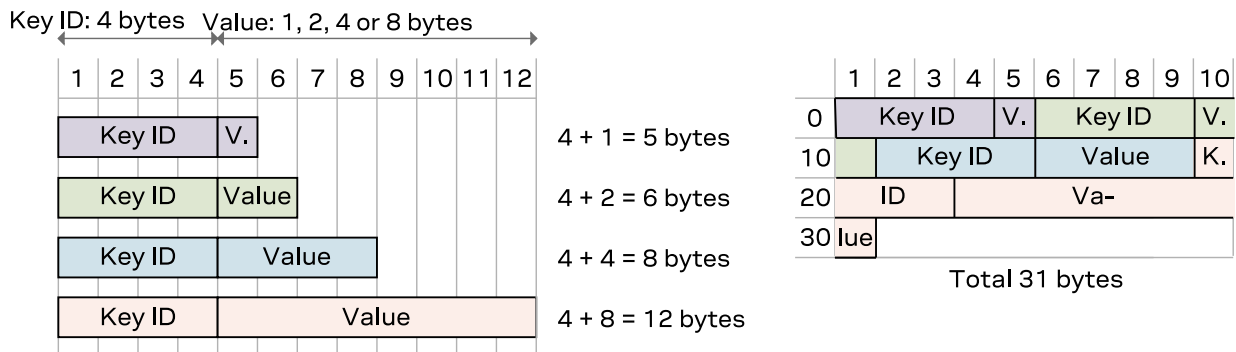


Note that this is an arbitrary example and any number of items of any value storage size can be concatenated the same way.

6.6 Configuration transactions

The configuration interface supports two mechanisms of configuration: the first is a transactionless mechanism where sent configuration changes are applied immediately to the configuration layer(s) requested. The second mechanism is a configuration transaction.

A transaction offers a way of queuing multiple configuration changes. It is particularly useful where different configuration keys depend on each other in such a way that sending one before the other can cause the configuration to be rejected. The queued configuration change requests are stored then checked collectively before being applied to the receiver.

A transaction can have the following states described in the figure below.

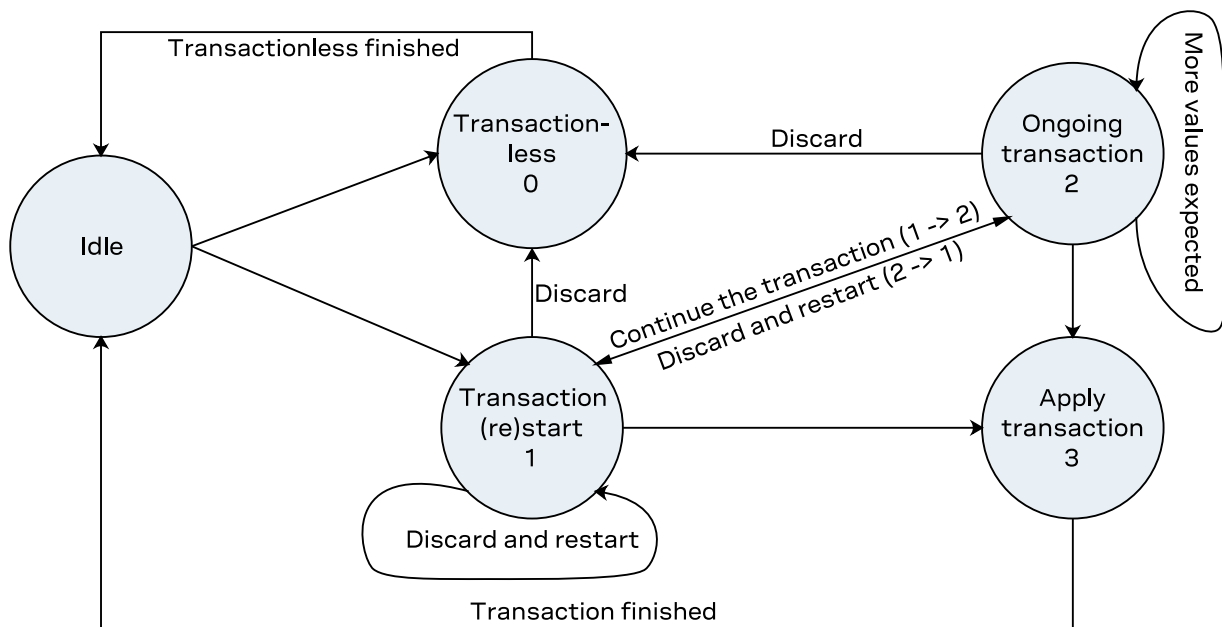

When starting a transaction, the user must specify the layer(s) the changes will be applied to. This list of configuration layer(s) must be observed throughout the transaction states. Modifying the configuration layer(s) mid-transaction will cause the transaction to be aborted and no queued changes will be applied.

In the start transaction state, the receiver will lock the configuration database so that changes from another entity or message cannot be applied. It is possible to send a configuration key-value pairs with the start transaction state. These will be queued waiting to be applied.

In the ongoing state, a configuration key and value must be sent. The receiver will abort the transaction and not apply any changes if this condition is violated. Key-value pairs sent in the ongoing state will be queued waiting to be applied.

In the apply state, the queued changes will be collectively checked and applied to the requested configuration layer(s). Note that any additional key-value pairs sent within the apply state will be ignored.

Note that a transaction can only come from a single source, a [UBX-CFG-VALSET](#) message or a [UBX-CFG-VALDEL](#) message. This means that in any given transaction it is not possible to mix a delete

and a save request. Starting a transaction from a different source will abort the current transaction and no queued changes would be applied.

Refer to [UBX-CFG-VALSET](#) and [UBX-CFG-VALDEL](#) messages for a detailed description of how to set up a configuration transaction, its limitations and conditions that would cause the transaction to be rejected.

6.7 Configuration reset behavior

The RAM layer is always rebuilt from the layers below when the chip's processor comes out from reset. When using [UBX-CFG-RST](#) the processor goes through a reset cycle with these reset types (`resetMode` field):

- 0x00 hardware reset (watchdog) immediately
- 0x01 controlled software reset
- 0x04 hardware reset (watchdog) after shutdown

See section Forcing a receiver reset in the integration manual.

6.8 Configuration overview

Group	Description
CFG-BDS	BeiDou system configuration
CFG-GEOFENCE	Geofencing configuration
CFG-HW	Hardware configuration
CFG-I2C	Configuration of the I2C interface
CFG-I2CINPROT	Input protocol configuration of the I2C interface
CFG-I2COUTPROT	Output protocol configuration of the I2C interface
CFG-INFMSG	Information message configuration
CFG-ITFM	Jamming and interference monitor configuration
CFG-MOT	Motion detector configuration
CFG-MSGOUT	Message output configuration
CFG-NAVHPG	High precision navigation configuration
CFG-NAVSPG	Standard precision navigation configuration
CFG-NMEA	NMEA protocol configuration
CFG-RATE	Navigation and measurement rate configuration
CFG-RINV	Remote inventory
CFG-RTCM	RTCM protocol configuration
CFG-SBAS	SBAS configuration
CFG-SEC	Security configuration
CFG-SFCORE	Sensor fusion (SF) core configuration
CFG-SFIMU	Sensor fusion (SF) inertial measurement unit (IMU) configuration
CFG-SFODO	Sensor fusion (SF) odometer configuration
CFG-SIGNAL	Satellite systems (GNSS) signal configuration
CFG-SPI	Configuration of the SPI interface
CFG-SPIINPROT	Input protocol configuration of the SPI interface
CFG-SPIOUTPROT	Output protocol configuration of the SPI interface

Group	Description
CFG-TP	Timepulse configuration
CFG-TXREADY	TX ready configuration
CFG-UART1	Configuration of the UART1 interface
CFG-UART1INPROT	Input protocol configuration of the UART1 interface
CFG-UART1OUTPROT	Output protocol configuration of the UART1 interface
CFG-UART2	Configuration of the UART2 interface
CFG-UART2INPROT	Input protocol configuration of the UART2 interface
CFG-UART2OUTPROT	Output protocol configuration of the UART2 interface
CFG-USB	Configuration of the USB interface
CFG-USBINPROT	Input protocol configuration of the USB interface
CFG-USBOUTPROT	Output protocol configuration of the USB interface

6.9 Configuration reference

6.9.1 CFG-BDS: BeiDou system configuration

Note that enabling and disabling of individual GNSS is done via the [CFG-SIGNAL](#) configuration group.

Configuration item	Key ID	Type	Scale	Unit	Description
CFG-BDS-USE_GEO_PRN	0x10340014	L	-	-	Use BeiDou geostationary satellites (PRN 1-5 and 59-63)

Table 1: CFG-BDS configuration items

6.9.2 CFG-GEOFENCE: Geofencing configuration

Configuration for the geofencing feature. See section Geofencing in the integration manual for feature details.

If the receiver is sent a valid new configuration, it will respond with a [UBX-ACK-ACK](#) message and immediately change to the new configuration. Otherwise the receiver will reject the request, by issuing a [UBX-ACK-NAK](#) and continuing operation with the previous configuration.

Note that the acknowledge message does not indicate whether the PIO configuration has been successfully applied (pin assigned), it only indicates the successful configuration of the feature. The configured PIO must be previously unoccupied for successful assignment.

Configuration item	Key ID	Type	Scale	Unit	Description
CFG-GEOFENCE-CONFLVL	0x20240011	E1	-	-	Required confidence level for state evaluation This value times the position's standard deviation (sigma) defines the confidence band. See Table 3 below for a list of possible constants for this item.
CFG-GEOFENCE-USE_PIO	0x10240012	L	-	-	Use PIO combined fence state output
CFG-GEOFENCE-PINPOL	0x20240013	E1	-	-	PIO pin polarity See Table 4 below for a list of possible constants for this item.
CFG-GEOFENCE-PIN	0x20240014	U1	-	-	PIO pin number
CFG-GEOFENCE-USE_FENCE1	0x10240020	L	-	-	Use first geofence
CFG-GEOFENCE-FENCE1_LAT	0x40240021	I4	1e-7	deg	Latitude of the first geofence circle center
CFG-GEOFENCE-FENCE1_LON	0x40240022	I4	1e-7	deg	Longitude of the first geofence circle center

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-GEOFENCE-FENCE1_RAD</i>	0x40240023	U4	0.01	m	Radius of the first geofence circle
<i>CFG-GEOFENCE-USE_FENCE2</i>	0x10240030	L	-	-	Use second geofence
<i>CFG-GEOFENCE-FENCE2_LAT</i>	0x40240031	I4	1e-7	deg	Latitude of the second geofence circle center
<i>CFG-GEOFENCE-FENCE2_LON</i>	0x40240032	I4	1e-7	deg	Longitude of the second geofence circle center
<i>CFG-GEOFENCE-FENCE2_RAD</i>	0x40240033	U4	0.01	m	Radius of the second geofence circle
<i>CFG-GEOFENCE-USE_FENCE3</i>	0x10240040	L	-	-	Use third geofence
<i>CFG-GEOFENCE-FENCE3_LAT</i>	0x40240041	I4	1e-7	deg	Latitude of the third geofence circle center
<i>CFG-GEOFENCE-FENCE3_LON</i>	0x40240042	I4	1e-7	deg	Longitude of the third geofence circle center
<i>CFG-GEOFENCE-FENCE3_RAD</i>	0x40240043	U4	0.01	m	Radius of the third geofence circle
<i>CFG-GEOFENCE-USE_FENCE4</i>	0x10240050	L	-	-	Use fourth geofence
<i>CFG-GEOFENCE-FENCE4_LAT</i>	0x40240051	I4	1e-7	deg	Latitude of the fourth geofence circle center
<i>CFG-GEOFENCE-FENCE4_LON</i>	0x40240052	I4	1e-7	deg	Longitude of the fourth geofence circle center
<i>CFG-GEOFENCE-FENCE4_RAD</i>	0x40240053	U4	0.01	m	Radius of the fourth geofence circle

Table 2: CFG-GEOFENCE configuration items

Constant	Value	Description
<i>L000</i>	0	No confidence
<i>L680</i>	1	68%
<i>L950</i>	2	95%
<i>L997</i>	3	99.7%
<i>L9999</i>	4	99.99%
<i>L999999</i>	5	99.9999%

Table 3: Constants for CFG-GEOFENCE-CONFLVL

Constant	Value	Description
<i>LOW_IN</i>	0	PIO low means inside geofence
<i>LOW_OUT</i>	1	PIO low means outside geofence

Table 4: Constants for CFG-GEOFENCE-PINPOL

6.9.3 CFG-HW: Hardware configuration

Hardware configuration settings.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-HW-ANT_CFG_VOLTCTRL</i>	0x10a3002e	L	-	-	Active antenna voltage control flag Enable active antenna voltage control flag. Used by EXT and MADC engines.
<i>CFG-HW-ANT_CFG_SHORTDET</i>	0x10a3002f	L	-	-	Short antenna detection flag Enable short antenna detection flag. Used by EXT and MADC engines.
<i>CFG-HW-ANT_CFG_SHORTDET_POL</i>	0x10a30030	L	-	-	Short antenna detection polarity Set to true if polarity of the antenna short detection is active low. Used by EXT engine.
<i>CFG-HW-ANT_CFG_OPENDET</i>	0x10a30031	L	-	-	Open antenna detection flag Enable open antenna detection flag. Used by EXT and MADC engines.
<i>CFG-HW-ANT_CFG_OPENDET_POL</i>	0x10a30032	L	-	-	Open antenna detection polarity Set to true if polarity of the antenna open detection is active low. Used by EXT engine.
<i>CFG-HW-ANT_CFG_PWRDOWN</i>	0x10a30033	L	-	-	Power down antenna flag

Configuration item	Key ID	Type	Scale	Unit	Description
					Enable power down antenna logic in the event of antenna short circuit. CFG-HW-ANT_CFG_SHORTDET must be enabled to use this feature. Used by EXT and MADC engines.
CFG-HW-ANT_CFG_PWRDOWN_POL	0x10a30034	L	-	-	Power down antenna logic polarity Set to true if polarity of the antenna power down logic is active high. Used by EXT and MADC engines.
CFG-HW-ANT_CFG_RECOVER	0x10a30035	L	-	-	Automatic recovery from short state flag Enable automatic recovery from short state. Used by EXT and MADC engines.
CFG-HW-ANT_SUP_SWITCH_PIN	0x20a30036	U1	-	-	ANT1 PIO number Antenna Switch (ANT1) PIO number. Used by EXT and MADC engines.
CFG-HW-ANT_SUP_SHORT_PIN	0x20a30037	U1	-	-	ANT0 PIO number Antenna Short (ANT0) PIO number. Used by EXT engine.
CFG-HW-ANT_SUP_OPEN_PIN	0x20a30038	U1	-	-	ANT2 PIO number Antenna Switch (ANT2) PIO number. Used by EXT engine.
CFG-HW-ANT_SUP_ENGINE	0x20a30054	E1	-	-	Antenna supervisor engine selection Select the engine used to evaluate antenna state. See Table 6 below for a list of possible constants for this item.
CFG-HW-ANT_SUP_SHORT_THR	0x20a30055	U1	-	mV	Antenna supervisor MADC engine short detection threshold Threshold above which antenna short is detected. Used by MADC engine.
CFG-HW-ANT_SUP_OPEN_THR	0x20a30056	U1	-	mV	Antenna supervisor MADC engine open detection threshold Threshold below which antenna open/disconnected is detected. Used by MADC engine.

Table 5: CFG-HW configuration items

Constant	Value	Description
EXT	0	Uses external comparators for current measurement.
MADC	1	Uses built-in ADC and a shunt for current measurement.

Table 6: Constants for CFG-HW-ANT_SUP_ENGINE

6.9.4 CFG-I2C: Configuration of the I2C interface

Settings needed to configure the I2C communication interface.

Configuration item	Key ID	Type	Scale	Unit	Description
CFG-I2C-ADDRESS	0x20510001	U1	-	-	I2C slave address of the receiver (7 bits)
CFG-I2C-EXTENDEDTIMEOUT	0x10510002	L	-	-	Flag to disable timeouting the interface after 1.5 s
CFG-I2C-ENABLED	0x10510003	L	-	-	Flag to indicate if the I2C interface should be enabled

Table 7: CFG-I2C configuration items

6.9.5 CFG-I2CINPROT: Input protocol configuration of the I2C interface

Input protocol enable flags of the I2C interface.

Configuration item	Key ID	Type	Scale	Unit	Description
CFG-I2CINPROT-UBX	0x10710001	L	-	-	Flag to indicate if UBX should be an input protocol on I2C
CFG-I2CINPROT-NMEA	0x10710002	L	-	-	Flag to indicate if NMEA should be an input protocol on I2C

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-I2CINPROT-RTCM3X</i>	0x10710004	L	-	-	Flag to indicate if RTCM3X should be an input protocol on I2C
<i>CFG-I2CINPROT-SPARTN</i>	0x10710005	L	-	-	Flag to indicate if SPARTN should be an input protocol on I2C

Table 8: CFG-I2CINPROT configuration items

6.9.6 CFG-I2COUTPROT: Output protocol configuration of the I2C interface

Output protocol enable flags of the I2C interface.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-I2COUTPROT-UBX</i>	0x10720001	L	-	-	Flag to indicate if UBX should be an output protocol on I2C
<i>CFG-I2COUTPROT-NMEA</i>	0x10720002	L	-	-	Flag to indicate if NMEA should be an output protocol on I2C

Table 9: CFG-I2COUTPROT configuration items

6.9.7 CFG-INFMSG: Information message configuration

Information message configuration for the NMEA and UBX protocols.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-INFMSG-UBX_I2C</i>	0x20920001	X1	-	-	Information message enable flags for the UBX protocol on the I2C interface
See Table 11 below for a list of possible constants for this item.					
<i>CFG-INFMSG-UBX_UART1</i>	0x20920002	X1	-	-	Information message enable flags for the UBX protocol on the UART1 interface
See Table 11 below for a list of possible constants for this item.					
<i>CFG-INFMSG-UBX_UART2</i>	0x20920003	X1	-	-	Information message enable flags for the UBX protocol on the UART2 interface
See Table 11 below for a list of possible constants for this item.					
<i>CFG-INFMSG-UBX_USB</i>	0x20920004	X1	-	-	Information message enable flags for the UBX protocol on the USB interface
See Table 11 below for a list of possible constants for this item.					
<i>CFG-INFMSG-UBX_SPI</i>	0x20920005	X1	-	-	Information message enable flags for the UBX protocol on the SPI interface
See Table 11 below for a list of possible constants for this item.					
<i>CFG-INFMSG-NMEA_I2C</i>	0x20920006	X1	-	-	Information message enable flags for the NMEA protocol on the I2C interface
See Table 11 below for a list of possible constants for this item.					
<i>CFG-INFMSG-NMEA_UART1</i>	0x20920007	X1	-	-	Information message enable flags for the NMEA protocol on the UART1 interface
See Table 11 below for a list of possible constants for this item.					
<i>CFG-INFMSG-NMEA_UART2</i>	0x20920008	X1	-	-	Information message enable flags for the NMEA protocol on the UART2 interface
See Table 11 below for a list of possible constants for this item.					
<i>CFG-INFMSG-NMEA_USB</i>	0x20920009	X1	-	-	Information message enable flags for the NMEA protocol on the USB interface
See Table 11 below for a list of possible constants for this item.					
<i>CFG-INFMSG-NMEA_SPI</i>	0x2092000a	X1	-	-	Information message enable flags for the NMEA protocol on the SPI interface
See Table 11 below for a list of possible constants for this item.					

Table 10: CFG-INFMSG configuration items

Constant	Value	Description
<i>ERROR</i>	0x01	Enable ERROR information messages
<i>WARNING</i>	0x02	Enable WARNING information messages
<i>NOTICE</i>	0x04	Enable NOTICE information messages
<i>TEST</i>	0x08	Enable TEST information messages
<i>DEBUG</i>	0x10	Enable DEBUG information messages

Table 11: Constants for CFG-INFMSG-UBX_I2C, CFG-INFMSG-UBX_UART1, CFG-INFMSG-UBX_UART2, CFG-INFMSG-UBX_USB, CFG-INFMSG-UBX_SPI, CFG-INFMSG-NMEA_I2C, CFG-INFMSG-NMEA_UART1, CFG-INFMSG-NMEA_UART2, CFG-INFMSG-NMEA_USB, CFG-INFMSG-NMEA_SPI

6.9.8 CFG-ITFM: Jamming and interference monitor configuration

Configuration of jamming and interference monitor.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-ITFM-BBTHRESHOLD</i>	0x20410001	U1	-	-	Broadband jamming detection threshold
<i>CFG-ITFM-CWTHRESHOLD</i>	0x20410002	U1	-	-	CW jamming detection threshold
<i>CFG-ITFM-ENABLE</i>	0x1041000d	L	-	-	Enable interference detection
<i>CFG-ITFM-ANTSETTING</i>	0x20410010	E1	-	-	Antenna setting
See Table 13 below for a list of possible constants for this item.					
<i>CFG-ITFM-ENABLE_AUX</i>	0x10410013	L	-	-	Scan auxiliary bands
Set to true to scan auxiliary bands.					
Supported on u-blox 8 / u-blox M8 only, otherwise ignored.					

Table 12: CFG-ITFM configuration items

Constant	Value	Description
<i>UNKNOWN</i>	0	Unknown
<i>PASSIVE</i>	1	Passive
<i>ACTIVE</i>	2	Active

Table 13: Constants for CFG-ITFM-ANTSETTING

6.9.9 CFG-MOT: Motion detector configuration

The items in this group specify the parameters used for the internal receiver motion detector. The platform motion is assessed by combining the detected motion of different detectors looking at specific data types (i.e. GNSS, gyroscopes, accelerometers, wheel ticks). The decision thresholds of the internal detectors can be specified using the configuration items in this group.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-MOT-GNSSSPEED_THRS</i>	0x20250038	U1	0.01	m/s	GNSS speed threshold below which platform is considered as stationary (a.k.a. static hold threshold)
Set this parameter to 0 for firmware default value or behavior.					
<i>CFG-MOT-GNSSDIST_THRS</i>	0x3025003b	U2	-	-	Distance above which GNSS-based stationary motion is exit (a.k.a. static hold distance threshold)
Set this parameter to 0 for firmware default value or behavior.					

Table 14: CFG-MOT configuration items

6.9.10 CFG-MSGOUT: Message output configuration

For each message and port a separate output rate (per second, per epoch) can be configured.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-MSGOUT-NMEA_ID_DTM_I2C</i>	0x209100a6	U1	-	-	Output rate of the NMEA-GX-DTM message on port I2C
<i>CFG-MSGOUT-NMEA_ID_DTM_SPI</i>	0x209100aa	U1	-	-	Output rate of the NMEA-GX-DTM message on port SPI
<i>CFG-MSGOUT-NMEA_ID_DTM_UART1</i>	0x209100a7	U1	-	-	Output rate of the NMEA-GX-DTM message on port UART1
<i>CFG-MSGOUT-NMEA_ID_DTM_UART2</i>	0x209100a8	U1	-	-	Output rate of the NMEA-GX-DTM message on port UART2
<i>CFG-MSGOUT-NMEA_ID_DTM_USB</i>	0x209100a9	U1	-	-	Output rate of the NMEA-GX-DTM message on port USB
<i>CFG-MSGOUT-NMEA_ID_GBS_I2C</i>	0x209100dd	U1	-	-	Output rate of the NMEA-GX-GBS message on port I2C
<i>CFG-MSGOUT-NMEA_ID_GBS_SPI</i>	0x209100e1	U1	-	-	Output rate of the NMEA-GX-GBS message on port SPI
<i>CFG-MSGOUT-NMEA_ID_GBS_UART1</i>	0x209100de	U1	-	-	Output rate of the NMEA-GX-GBS message on port UART1
<i>CFG-MSGOUT-NMEA_ID_GBS_UART2</i>	0x209100df	U1	-	-	Output rate of the NMEA-GX-GBS message on port UART2
<i>CFG-MSGOUT-NMEA_ID_GBS_USB</i>	0x209100e0	U1	-	-	Output rate of the NMEA-GX-GBS message on port USB
<i>CFG-MSGOUT-NMEA_ID_GGA_I2C</i>	0x209100ba	U1	-	-	Output rate of the NMEA-GX-GGA message on port I2C
<i>CFG-MSGOUT-NMEA_ID_GGA_SPI</i>	0x209100be	U1	-	-	Output rate of the NMEA-GX-GGA message on port SPI
<i>CFG-MSGOUT-NMEA_ID_GGA_UART1</i>	0x209100bb	U1	-	-	Output rate of the NMEA-GX-GGA message on port UART1
<i>CFG-MSGOUT-NMEA_ID_GGA_UART2</i>	0x209100bc	U1	-	-	Output rate of the NMEA-GX-GGA message on port UART2
<i>CFG-MSGOUT-NMEA_ID_GGA_USB</i>	0x209100bd	U1	-	-	Output rate of the NMEA-GX-GGA message on port USB
<i>CFG-MSGOUT-NMEA_ID_GLL_I2C</i>	0x209100c9	U1	-	-	Output rate of the NMEA-GX-GLL message on port I2C
<i>CFG-MSGOUT-NMEA_ID_GLL_SPI</i>	0x209100cd	U1	-	-	Output rate of the NMEA-GX-GLL message on port SPI
<i>CFG-MSGOUT-NMEA_ID_GLL_UART1</i>	0x209100ca	U1	-	-	Output rate of the NMEA-GX-GLL message on port UART1
<i>CFG-MSGOUT-NMEA_ID_GLL_UART2</i>	0x209100cb	U1	-	-	Output rate of the NMEA-GX-GLL message on port UART2
<i>CFG-MSGOUT-NMEA_ID_GLL_USB</i>	0x209100cc	U1	-	-	Output rate of the NMEA-GX-GLL message on port USB
<i>CFG-MSGOUT-NMEA_ID_GNS_I2C</i>	0x209100b5	U1	-	-	Output rate of the NMEA-GX-GNS message on port I2C
<i>CFG-MSGOUT-NMEA_ID_GNS_SPI</i>	0x209100b9	U1	-	-	Output rate of the NMEA-GX-GNS message on port SPI
<i>CFG-MSGOUT-NMEA_ID_GNS_UART1</i>	0x209100b6	U1	-	-	Output rate of the NMEA-GX-GNS message on port UART1
<i>CFG-MSGOUT-NMEA_ID_GNS_UART2</i>	0x209100b7	U1	-	-	Output rate of the NMEA-GX-GNS message on port UART2
<i>CFG-MSGOUT-NMEA_ID_GNS_USB</i>	0x209100b8	U1	-	-	Output rate of the NMEA-GX-GNS message on port USB
<i>CFG-MSGOUT-NMEA_ID_GRS_I2C</i>	0x209100ce	U1	-	-	Output rate of the NMEA-GX-GRS message on port I2C

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-MSGOUT-NMEA_ID_GRS_SPI</i>	0x209100d2	U1	-	-	Output rate of the NMEA-GX-GRS message on port SPI
<i>CFG-MSGOUT-NMEA_ID_GRS_UART1</i>	0x209100cf	U1	-	-	Output rate of the NMEA-GX-GRS message on port UART1
<i>CFG-MSGOUT-NMEA_ID_GRS_UART2</i>	0x209100d0	U1	-	-	Output rate of the NMEA-GX-GRS message on port UART2
<i>CFG-MSGOUT-NMEA_ID_GRS_USB</i>	0x209100d1	U1	-	-	Output rate of the NMEA-GX-GRS message on port USB
<i>CFG-MSGOUT-NMEA_ID_GSA_I2C</i>	0x209100bf	U1	-	-	Output rate of the NMEA-GX-GSA message on port I2C
<i>CFG-MSGOUT-NMEA_ID_GSA_SPI</i>	0x209100c3	U1	-	-	Output rate of the NMEA-GX-GSA message on port SPI
<i>CFG-MSGOUT-NMEA_ID_GSA_UART1</i>	0x209100c0	U1	-	-	Output rate of the NMEA-GX-GSA message on port UART1
<i>CFG-MSGOUT-NMEA_ID_GSA_UART2</i>	0x209100c1	U1	-	-	Output rate of the NMEA-GX-GSA message on port UART2
<i>CFG-MSGOUT-NMEA_ID_GSA_USB</i>	0x209100c2	U1	-	-	Output rate of the NMEA-GX-GSA message on port USB
<i>CFG-MSGOUT-NMEA_ID_GST_I2C</i>	0x209100d3	U1	-	-	Output rate of the NMEA-GX-GST message on port I2C
<i>CFG-MSGOUT-NMEA_ID_GST_SPI</i>	0x209100d7	U1	-	-	Output rate of the NMEA-GX-GST message on port SPI
<i>CFG-MSGOUT-NMEA_ID_GST_UART1</i>	0x209100d4	U1	-	-	Output rate of the NMEA-GX-GST message on port UART1
<i>CFG-MSGOUT-NMEA_ID_GST_UART2</i>	0x209100d5	U1	-	-	Output rate of the NMEA-GX-GST message on port UART2
<i>CFG-MSGOUT-NMEA_ID_GST_USB</i>	0x209100d6	U1	-	-	Output rate of the NMEA-GX-GST message on port USB
<i>CFG-MSGOUT-NMEA_ID_GSV_I2C</i>	0x209100c4	U1	-	-	Output rate of the NMEA-GX-GSV message on port I2C
<i>CFG-MSGOUT-NMEA_ID_GSV_SPI</i>	0x209100c8	U1	-	-	Output rate of the NMEA-GX-GSV message on port SPI
<i>CFG-MSGOUT-NMEA_ID_GSV_UART1</i>	0x209100c5	U1	-	-	Output rate of the NMEA-GX-GSV message on port UART1
<i>CFG-MSGOUT-NMEA_ID_GSV_UART2</i>	0x209100c6	U1	-	-	Output rate of the NMEA-GX-GSV message on port UART2
<i>CFG-MSGOUT-NMEA_ID_GSV_USB</i>	0x209100c7	U1	-	-	Output rate of the NMEA-GX-GSV message on port USB
<i>CFG-MSGOUT-NMEA_ID_RLM_I2C</i>	0x20910400	U1	-	-	Output rate of the NMEA-GX-RLM message on port I2C
<i>CFG-MSGOUT-NMEA_ID_RLM_SPI</i>	0x20910404	U1	-	-	Output rate of the NMEA-GX-RLM message on port SPI
<i>CFG-MSGOUT-NMEA_ID_RLM_UART1</i>	0x20910401	U1	-	-	Output rate of the NMEA-GX-RLM message on port UART1
<i>CFG-MSGOUT-NMEA_ID_RLM_UART2</i>	0x20910402	U1	-	-	Output rate of the NMEA-GX-RLM message on port UART2
<i>CFG-MSGOUT-NMEA_ID_RLM_USB</i>	0x20910403	U1	-	-	Output rate of the NMEA-GX-RLM message on port USB
<i>CFG-MSGOUT-NMEA_ID_RMC_I2C</i>	0x209100ab	U1	-	-	Output rate of the NMEA-GX-RMC message on port I2C
<i>CFG-MSGOUT-NMEA_ID_RMC_SPI</i>	0x209100af	U1	-	-	Output rate of the NMEA-GX-RMC message on port SPI

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-MSGOUT-NMEA_ID_RMC_UART1</i>	0x209100ac	U1	-	-	Output rate of the NMEA-GX-RMC message on port UART1
<i>CFG-MSGOUT-NMEA_ID_RMC_UART2</i>	0x209100ad	U1	-	-	Output rate of the NMEA-GX-RMC message on port UART2
<i>CFG-MSGOUT-NMEA_ID_RMC_USB</i>	0x209100ae	U1	-	-	Output rate of the NMEA-GX-RMC message on port USB
<i>CFG-MSGOUT-NMEA_ID_THS_I2C</i>	0x209100e2	U1	-	-	Output rate of the NMEA-GX-THS message on port I2C
<i>CFG-MSGOUT-NMEA_ID_THS_SPI</i>	0x209100e6	U1	-	-	Output rate of the NMEA-GX-THS message on port SPI
<i>CFG-MSGOUT-NMEA_ID_THS_UART1</i>	0x209100e3	U1	-	-	Output rate of the NMEA-GX-THS message on port UART1
<i>CFG-MSGOUT-NMEA_ID_THS_UART2</i>	0x209100e4	U1	-	-	Output rate of the NMEA-GX-THS message on port UART2
<i>CFG-MSGOUT-NMEA_ID_THS_USB</i>	0x209100e5	U1	-	-	Output rate of the NMEA-GX-THS message on port USB
<i>CFG-MSGOUT-NMEA_ID_VTG_I2C</i>	0x209100b0	U1	-	-	Output rate of the NMEA-GX-VTG message on port I2C
<i>CFG-MSGOUT-NMEA_ID_VTG_SPI</i>	0x209100b4	U1	-	-	Output rate of the NMEA-GX-VTG message on port SPI
<i>CFG-MSGOUT-NMEA_ID_VTG_UART1</i>	0x209100b1	U1	-	-	Output rate of the NMEA-GX-VTG message on port UART1
<i>CFG-MSGOUT-NMEA_ID_VTG_UART2</i>	0x209100b2	U1	-	-	Output rate of the NMEA-GX-VTG message on port UART2
<i>CFG-MSGOUT-NMEA_ID_VTG_USB</i>	0x209100b3	U1	-	-	Output rate of the NMEA-GX-VTG message on port USB
<i>CFG-MSGOUT-NMEA_ID_ZDA_I2C</i>	0x209100d8	U1	-	-	Output rate of the NMEA-GX-ZDA message on port I2C
<i>CFG-MSGOUT-NMEA_ID_ZDA_SPI</i>	0x209100dc	U1	-	-	Output rate of the NMEA-GX-ZDA message on port SPI
<i>CFG-MSGOUT-NMEA_ID_ZDA_UART1</i>	0x209100d9	U1	-	-	Output rate of the NMEA-GX-ZDA message on port UART1
<i>CFG-MSGOUT-NMEA_ID_ZDA_UART2</i>	0x209100da	U1	-	-	Output rate of the NMEA-GX-ZDA message on port UART2
<i>CFG-MSGOUT-NMEA_ID_ZDA_USB</i>	0x209100db	U1	-	-	Output rate of the NMEA-GX-ZDA message on port USB
<i>CFG-MSGOUT-PUBX_ID_POLYP_I2C</i>	0x209100ec	U1	-	-	Output rate of the NMEA-GX-PUBX00 message on port I2C
<i>CFG-MSGOUT-PUBX_ID_POLYP_SPI</i>	0x209100f0	U1	-	-	Output rate of the NMEA-GX-PUBX00 message on port SPI
<i>CFG-MSGOUT-PUBX_ID_POLYP_UART1</i>	0x209100ed	U1	-	-	Output rate of the NMEA-GX-PUBX00 message on port UART1
<i>CFG-MSGOUT-PUBX_ID_POLYP_UART2</i>	0x209100ee	U1	-	-	Output rate of the NMEA-GX-PUBX00 message on port UART2
<i>CFG-MSGOUT-PUBX_ID_POLYP_USB</i>	0x209100ef	U1	-	-	Output rate of the NMEA-GX-PUBX00 message on port USB
<i>CFG-MSGOUT-PUBX_ID_POLYS_I2C</i>	0x209100f1	U1	-	-	Output rate of the NMEA-GX-PUBX03 message on port I2C
<i>CFG-MSGOUT-PUBX_ID_POLYS_SPI</i>	0x209100f5	U1	-	-	Output rate of the NMEA-GX-PUBX03 message on port SPI
<i>CFG-MSGOUT-PUBX_ID_POLYS_UART1</i>	0x209100f2	U1	-	-	Output rate of the NMEA-GX-PUBX03 message on port UART1

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-MSGOUT-PUBX_ID_POLYS_UART2</i>	0x209100f3	U1	-	-	Output rate of the NMEA-GX-PUBX03 message on port UART2
<i>CFG-MSGOUT-PUBX_ID_POLYS_USB</i>	0x209100f4	U1	-	-	Output rate of the NMEA-GX-PUBX03 message on port USB
<i>CFG-MSGOUT-PUBX_ID_POLYT_I2C</i>	0x209100f6	U1	-	-	Output rate of the NMEA-GX-PUBX04 message on port I2C
<i>CFG-MSGOUT-PUBX_ID_POLYT_SPI</i>	0x209100fa	U1	-	-	Output rate of the NMEA-GX-PUBX04 message on port SPI
<i>CFG-MSGOUT-PUBX_ID_POLYT_UART1</i>	0x209100f7	U1	-	-	Output rate of the NMEA-GX-PUBX04 message on port UART1
<i>CFG-MSGOUT-PUBX_ID_POLYT_UART2</i>	0x209100f8	U1	-	-	Output rate of the NMEA-GX-PUBX04 message on port UART2
<i>CFG-MSGOUT-PUBX_ID_POLYT_USB</i>	0x209100f9	U1	-	-	Output rate of the NMEA-GX-PUBX04 message on port USB
<i>CFG-MSGOUT-UBX_ESF_ALG_I2C</i>	0x2091010f	U1	-	-	Output rate of the UBX-ESF-ALG message on port I2C
<i>CFG-MSGOUT-UBX_ESF_ALG_SPI</i>	0x20910113	U1	-	-	Output rate of the UBX-ESF-ALG message on port SPI
<i>CFG-MSGOUT-UBX_ESF_ALG_UART1</i>	0x20910110	U1	-	-	Output rate of the UBX-ESF-ALG message on port UART1
<i>CFG-MSGOUT-UBX_ESF_ALG_UART2</i>	0x20910111	U1	-	-	Output rate of the UBX-ESF-ALG message on port UART2
<i>CFG-MSGOUT-UBX_ESF_ALG_USB</i>	0x20910112	U1	-	-	Output rate of the UBX-ESF-ALG message on port USB
<i>CFG-MSGOUT-UBX_ESF_INS_I2C</i>	0x20910114	U1	-	-	Output rate of the UBX-ESF-INS message on port I2C
<i>CFG-MSGOUT-UBX_ESF_INS_SPI</i>	0x20910118	U1	-	-	Output rate of the UBX-ESF-INS message on port SPI
<i>CFG-MSGOUT-UBX_ESF_INS_UART1</i>	0x20910115	U1	-	-	Output rate of the UBX-ESF-INS message on port UART1
<i>CFG-MSGOUT-UBX_ESF_INS_UART2</i>	0x20910116	U1	-	-	Output rate of the UBX-ESF-INS message on port UART2
<i>CFG-MSGOUT-UBX_ESF_INS_USB</i>	0x20910117	U1	-	-	Output rate of the UBX-ESF-INS message on port USB
<i>CFG-MSGOUT-UBX_ESF_MEAS_I2C</i>	0x20910277	U1	-	-	Output rate of the UBX-ESF-MEAS message on port I2C
<i>CFG-MSGOUT-UBX_ESF_MEAS_SPI</i>	0x2091027b	U1	-	-	Output rate of the UBX-ESF-MEAS message on port SPI
<i>CFG-MSGOUT-UBX_ESF_MEAS_UART1</i>	0x20910278	U1	-	-	Output rate of the UBX-ESF-MEAS message on port UART1
<i>CFG-MSGOUT-UBX_ESF_MEAS_UART2</i>	0x20910279	U1	-	-	Output rate of the UBX-ESF-MEAS message on port UART2
<i>CFG-MSGOUT-UBX_ESF_MEAS_USB</i>	0x2091027a	U1	-	-	Output rate of the UBX-ESF-MEAS message on port USB
<i>CFG-MSGOUT-UBX_ESF_RAW_I2C</i>	0x2091029f	U1	-	-	Output rate of the UBX-ESF-RAW message on port I2C
<i>CFG-MSGOUT-UBX_ESF_RAW_SPI</i>	0x209102a3	U1	-	-	Output rate of the UBX-ESF-RAW message on port SPI
<i>CFG-MSGOUT-UBX_ESF_RAW_UART1</i>	0x209102a0	U1	-	-	Output rate of the UBX-ESF-RAW message on port UART1
<i>CFG-MSGOUT-UBX_ESF_RAW_UART2</i>	0x209102a1	U1	-	-	Output rate of the UBX-ESF-RAW message on port UART2

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-MSGOUT-UBX_ESF_RAW_USB</i>	0x209102a2	U1	-	-	Output rate of the UBX-ESF-RAW message on port USB
<i>CFG-MSGOUT-UBX_ESF_STATUS_I2C</i>	0x20910105	U1	-	-	Output rate of the UBX-ESF-STATUS message on port I2C
<i>CFG-MSGOUT-UBX_ESF_STATUS_SPI</i>	0x20910109	U1	-	-	Output rate of the UBX-ESF-STATUS message on port SPI
<i>CFG-MSGOUT-UBX_ESF_STATUS_UART1</i>	0x20910106	U1	-	-	Output rate of the UBX-ESF-STATUS message on port UART1
<i>CFG-MSGOUT-UBX_ESF_STATUS_UART2</i>	0x20910107	U1	-	-	Output rate of the UBX-ESF-STATUS message on port UART2
<i>CFG-MSGOUT-UBX_ESF_STATUS_USB</i>	0x20910108	U1	-	-	Output rate of the UBX-ESF-STATUS message on port USB
<i>CFG-MSGOUT-UBX_MON_COMMS_I2C</i>	0x2091034f	U1	-	-	Output rate of the UBX-MON-COMMS message on port I2C
<i>CFG-MSGOUT-UBX_MON_COMMS_SPI</i>	0x20910353	U1	-	-	Output rate of the UBX-MON-COMMS message on port SPI
<i>CFG-MSGOUT-UBX_MON_COMMS_UART1</i>	0x20910350	U1	-	-	Output rate of the UBX-MON-COMMS message on port UART1
<i>CFG-MSGOUT-UBX_MON_COMMS_UART2</i>	0x20910351	U1	-	-	Output rate of the UBX-MON-COMMS message on port UART2
<i>CFG-MSGOUT-UBX_MON_COMMS_USB</i>	0x20910352	U1	-	-	Output rate of the UBX-MON-COMMS message on port USB
<i>CFG-MSGOUT-UBX_MON_HW2_I2C</i>	0x209101b9	U1	-	-	Output rate of the UBX-MON-HW2 message on port I2C
<i>CFG-MSGOUT-UBX_MON_HW2_SPI</i>	0x209101bd	U1	-	-	Output rate of the UBX-MON-HW2 message on port SPI
<i>CFG-MSGOUT-UBX_MON_HW2_UART1</i>	0x209101ba	U1	-	-	Output rate of the UBX-MON-HW2 message on port UART1
<i>CFG-MSGOUT-UBX_MON_HW2_UART2</i>	0x209101bb	U1	-	-	Output rate of the UBX-MON-HW2 message on port UART2
<i>CFG-MSGOUT-UBX_MON_HW2_USB</i>	0x209101bc	U1	-	-	Output rate of the UBX-MON-HW2 message on port USB
<i>CFG-MSGOUT-UBX_MON_HW3_I2C</i>	0x20910354	U1	-	-	Output rate of the UBX-MON-HW3 message on port I2C
<i>CFG-MSGOUT-UBX_MON_HW3_SPI</i>	0x20910358	U1	-	-	Output rate of the UBX-MON-HW3 message on port SPI
<i>CFG-MSGOUT-UBX_MON_HW3_UART1</i>	0x20910355	U1	-	-	Output rate of the UBX-MON-HW3 message on port UART1
<i>CFG-MSGOUT-UBX_MON_HW3_UART2</i>	0x20910356	U1	-	-	Output rate of the UBX-MON-HW3 message on port UART2
<i>CFG-MSGOUT-UBX_MON_HW3_USB</i>	0x20910357	U1	-	-	Output rate of the UBX-MON-HW3 message on port USB
<i>CFG-MSGOUT-UBX_MON_HW_I2C</i>	0x209101b4	U1	-	-	Output rate of the UBX-MON-HW message on port I2C
<i>CFG-MSGOUT-UBX_MON_HW_SPI</i>	0x209101b8	U1	-	-	Output rate of the UBX-MON-HW message on port SPI
<i>CFG-MSGOUT-UBX_MON_HW_UART1</i>	0x209101b5	U1	-	-	Output rate of the UBX-MON-HW message on port UART1
<i>CFG-MSGOUT-UBX_MON_HW_UART2</i>	0x209101b6	U1	-	-	Output rate of the UBX-MON-HW message on port UART2
<i>CFG-MSGOUT-UBX_MON_HW_USB</i>	0x209101b7	U1	-	-	Output rate of the UBX-MON-HW message on port USB

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-MSGOUT-UBX_MON_IO_I2C</i>	0x209101a5	U1	-	-	Output rate of the UBX-MON-IO message on port I2C
<i>CFG-MSGOUT-UBX_MON_IO_SPI</i>	0x209101a9	U1	-	-	Output rate of the UBX-MON-IO message on port SPI
<i>CFG-MSGOUT-UBX_MON_IO_UART1</i>	0x209101a6	U1	-	-	Output rate of the UBX-MON-IO message on port UART1
<i>CFG-MSGOUT-UBX_MON_IO_UART2</i>	0x209101a7	U1	-	-	Output rate of the UBX-MON-IO message on port UART2
<i>CFG-MSGOUT-UBX_MON_IO_USB</i>	0x209101a8	U1	-	-	Output rate of the UBX-MON-IO message on port USB
<i>CFG-MSGOUT-UBX_MON_MSGPP_I2C</i>	0x20910196	U1	-	-	Output rate of the UBX-MON-MSGPP message on port I2C
<i>CFG-MSGOUT-UBX_MON_MSGPP_SPI</i>	0x2091019a	U1	-	-	Output rate of the UBX-MON-MSGPP message on port SPI
<i>CFG-MSGOUT-UBX_MON_MSGPP_UART1</i>	0x20910197	U1	-	-	Output rate of the UBX-MON-MSGPP message on port UART1
<i>CFG-MSGOUT-UBX_MON_MSGPP_UART2</i>	0x20910198	U1	-	-	Output rate of the UBX-MON-MSGPP message on port UART2
<i>CFG-MSGOUT-UBX_MON_MSGPP_USB</i>	0x20910199	U1	-	-	Output rate of the UBX-MON-MSGPP message on port USB
<i>CFG-MSGOUT-UBX_MON_RF_I2C</i>	0x20910359	U1	-	-	Output rate of the UBX-MON-RF message on port I2C
<i>CFG-MSGOUT-UBX_MON_RF_SPI</i>	0x2091035d	U1	-	-	Output rate of the UBX-MON-RF message on port SPI
<i>CFG-MSGOUT-UBX_MON_RF_UART1</i>	0x2091035a	U1	-	-	Output rate of the UBX-MON-RF message on port UART1
<i>CFG-MSGOUT-UBX_MON_RF_UART2</i>	0x2091035b	U1	-	-	Output rate of the UBX-MON-RF message on port UART2
<i>CFG-MSGOUT-UBX_MON_RF_USB</i>	0x2091035c	U1	-	-	Output rate of the UBX-MON-RF message on port USB
<i>CFG-MSGOUT-UBX_MON_RXBUF_I2C</i>	0x209101a0	U1	-	-	Output rate of the UBX-MON-RXBUF message on port I2C
<i>CFG-MSGOUT-UBX_MON_RXBUF_SPI</i>	0x209101a4	U1	-	-	Output rate of the UBX-MON-RXBUF message on port SPI
<i>CFG-MSGOUT-UBX_MON_RXBUF_UART1</i>	0x209101a1	U1	-	-	Output rate of the UBX-MON-RXBUF message on port UART1
<i>CFG-MSGOUT-UBX_MON_RXBUF_UART2</i>	0x209101a2	U1	-	-	Output rate of the UBX-MON-RXBUF message on port UART2
<i>CFG-MSGOUT-UBX_MON_RXBUF_USB</i>	0x209101a3	U1	-	-	Output rate of the UBX-MON-RXBUF message on port USB
<i>CFG-MSGOUT-UBX_MON_RXR_I2C</i>	0x20910187	U1	-	-	Output rate of the UBX-MON-RXR message on port I2C
<i>CFG-MSGOUT-UBX_MON_RXR_SPI</i>	0x2091018b	U1	-	-	Output rate of the UBX-MON-RXR message on port SPI
<i>CFG-MSGOUT-UBX_MON_RXR_UART1</i>	0x20910188	U1	-	-	Output rate of the UBX-MON-RXR message on port UART1
<i>CFG-MSGOUT-UBX_MON_RXR_UART2</i>	0x20910189	U1	-	-	Output rate of the UBX-MON-RXR message on port UART2
<i>CFG-MSGOUT-UBX_MON_RXR_USB</i>	0x2091018a	U1	-	-	Output rate of the UBX-MON-RXR message on port USB
<i>CFG-MSGOUT-UBX_MON_SPAN_I2C</i>	0x2091038b	U1	-	-	Output rate of the UBX-MON-SPAN message on port I2C

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-MSGOUT-UBX_MON_SPAN_SPI</i>	0x2091038f	U1	-	-	Output rate of the UBX-MON-SPAN message on port SPI
<i>CFG-MSGOUT-UBX_MON_SPAN_UART1</i>	0x2091038c	U1	-	-	Output rate of the UBX-MON-SPAN message on port UART1
<i>CFG-MSGOUT-UBX_MON_SPAN_UART2</i>	0x2091038d	U1	-	-	Output rate of the UBX-MON-SPAN message on port UART2
<i>CFG-MSGOUT-UBX_MON_SPAN_USB</i>	0x2091038e	U1	-	-	Output rate of the UBX-MON-SPAN message on port USB
<i>CFG-MSGOUT-UBX_MON_TXBUF_I2C</i>	0x2091019b	U1	-	-	Output rate of the UBX-MON-TXBUF message on port I2C
<i>CFG-MSGOUT-UBX_MON_TXBUF_SPI</i>	0x2091019f	U1	-	-	Output rate of the UBX-MON-TXBUF message on port SPI
<i>CFG-MSGOUT-UBX_MON_TXBUF_UART1</i>	0x2091019c	U1	-	-	Output rate of the UBX-MON-TXBUF message on port UART1
<i>CFG-MSGOUT-UBX_MON_TXBUF_UART2</i>	0x2091019d	U1	-	-	Output rate of the UBX-MON-TXBUF message on port UART2
<i>CFG-MSGOUT-UBX_MON_TXBUF_USB</i>	0x2091019e	U1	-	-	Output rate of the UBX-MON-TXBUF message on port USB
<i>CFG-MSGOUT-UBX_NAV_ATT_I2C</i>	0x2091001f	U1	-	-	Output rate of the UBX-NAV-ATT message on port I2C
<i>CFG-MSGOUT-UBX_NAV_ATT_SPI</i>	0x20910023	U1	-	-	Output rate of the UBX-NAV-ATT message on port SPI
<i>CFG-MSGOUT-UBX_NAV_ATT_UART1</i>	0x20910020	U1	-	-	Output rate of the UBX-NAV-ATT message on port UART1
<i>CFG-MSGOUT-UBX_NAV_ATT_UART2</i>	0x20910021	U1	-	-	Output rate of the UBX-NAV-ATT message on port UART2
<i>CFG-MSGOUT-UBX_NAV_ATT_USB</i>	0x20910022	U1	-	-	Output rate of the UBX-NAV-ATT message on port USB
<i>CFG-MSGOUT-UBX_NAV_CLOCK_I2C</i>	0x20910065	U1	-	-	Output rate of the UBX-NAV-CLOCK message on port I2C
<i>CFG-MSGOUT-UBX_NAV_CLOCK_SPI</i>	0x20910069	U1	-	-	Output rate of the UBX-NAV-CLOCK message on port SPI
<i>CFG-MSGOUT-UBX_NAV_CLOCK_UART1</i>	0x20910066	U1	-	-	Output rate of the UBX-NAV-CLOCK message on port UART1
<i>CFG-MSGOUT-UBX_NAV_CLOCK_UART2</i>	0x20910067	U1	-	-	Output rate of the UBX-NAV-CLOCK message on port UART2
<i>CFG-MSGOUT-UBX_NAV_CLOCK_USB</i>	0x20910068	U1	-	-	Output rate of the UBX-NAV-CLOCK message on port USB
<i>CFG-MSGOUT-UBX_NAV_COV_I2C</i>	0x20910083	U1	-	-	Output rate of the UBX-NAV-COV message on port I2C
<i>CFG-MSGOUT-UBX_NAV_COV_SPI</i>	0x20910087	U1	-	-	Output rate of the UBX-NAV-COV message on port SPI
<i>CFG-MSGOUT-UBX_NAV_COV_UART1</i>	0x20910084	U1	-	-	Output rate of the UBX-NAV-COV message on port UART1
<i>CFG-MSGOUT-UBX_NAV_COV_UART2</i>	0x20910085	U1	-	-	Output rate of the UBX-NAV-COV message on port UART2
<i>CFG-MSGOUT-UBX_NAV_COV_USB</i>	0x20910086	U1	-	-	Output rate of the UBX-NAV-COV message on port USB
<i>CFG-MSGOUT-UBX_NAV_DOP_I2C</i>	0x20910038	U1	-	-	Output rate of the UBX-NAV-DOP message on port I2C
<i>CFG-MSGOUT-UBX_NAV_DOP_SPI</i>	0x2091003c	U1	-	-	Output rate of the UBX-NAV-DOP message on port SPI

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-MSGGOUT-UBX_NAV_DOP_UART1</i>	0x20910039	U1	-	-	Output rate of the UBX-NAV-DOP message on port UART1
<i>CFG-MSGGOUT-UBX_NAV_DOP_UART2</i>	0x2091003a	U1	-	-	Output rate of the UBX-NAV-DOP message on port UART2
<i>CFG-MSGGOUT-UBX_NAV_DOP_USB</i>	0x2091003b	U1	-	-	Output rate of the UBX-NAV-DOP message on port USB
<i>CFG-MSGGOUT-UBX_NAV_EELL_I2C</i>	0x20910313	U1	-	-	Output rate of the UBX-NAV-EELL message on port I2C
<i>CFG-MSGGOUT-UBX_NAV_EELL_SPI</i>	0x20910317	U1	-	-	Output rate of the UBX-NAV-EELL message on port SPI
<i>CFG-MSGGOUT-UBX_NAV_EELL_UART1</i>	0x20910314	U1	-	-	Output rate of the UBX-NAV-EELL message on port UART1
<i>CFG-MSGGOUT-UBX_NAV_EELL_UART2</i>	0x20910315	U1	-	-	Output rate of the UBX-NAV-EELL message on port UART2
<i>CFG-MSGGOUT-UBX_NAV_EELL_USB</i>	0x20910316	U1	-	-	Output rate of the UBX-NAV-EELL message on port USB
<i>CFG-MSGGOUT-UBX_NAV_EOE_I2C</i>	0x2091015f	U1	-	-	Output rate of the UBX-NAV-EOE message on port I2C
<i>CFG-MSGGOUT-UBX_NAV_EOE_SPI</i>	0x20910163	U1	-	-	Output rate of the UBX-NAV-EOE message on port SPI
<i>CFG-MSGGOUT-UBX_NAV_EOE_UART1</i>	0x20910160	U1	-	-	Output rate of the UBX-NAV-EOE message on port UART1
<i>CFG-MSGGOUT-UBX_NAV_EOE_UART2</i>	0x20910161	U1	-	-	Output rate of the UBX-NAV-EOE message on port UART2
<i>CFG-MSGGOUT-UBX_NAV_EOE_USB</i>	0x20910162	U1	-	-	Output rate of the UBX-NAV-EOE message on port USB
<i>CFG-MSGGOUT-UBX_NAV_GEOFENCE_I2C</i>	0x209100a1	U1	-	-	Output rate of the UBX-NAV-GEOFENCE message on port I2C
<i>CFG-MSGGOUT-UBX_NAV_GEOFENCE_SPI</i>	0x209100a5	U1	-	-	Output rate of the UBX-NAV-GEOFENCE message on port SPI
<i>CFG-MSGGOUT-UBX_NAV_GEOFENCE_UART1</i>	0x209100a2	U1	-	-	Output rate of the UBX-NAV-GEOFENCE message on port UART1
<i>CFG-MSGGOUT-UBX_NAV_GEOFENCE_UART2</i>	0x209100a3	U1	-	-	Output rate of the UBX-NAV-GEOFENCE message on port UART2
<i>CFG-MSGGOUT-UBX_NAV_GEOFENCE_USB</i>	0x209100a4	U1	-	-	Output rate of the UBX-NAV-GEOFENCE message on port USB
<i>CFG-MSGGOUT-UBX_NAV_HPOSECEF_I2C</i>	0x2091002e	U1	-	-	Output rate of the UBX-NAV-HPOSECEF message on port I2C
<i>CFG-MSGGOUT-UBX_NAV_HPOSECEF_SPI</i>	0x20910032	U1	-	-	Output rate of the UBX-NAV-HPOSECEF message on port SPI
<i>CFG-MSGGOUT-UBX_NAV_HPOSECEF_UART1</i>	0x2091002f	U1	-	-	Output rate of the UBX-NAV-HPOSECEF message on port UART1
<i>CFG-MSGGOUT-UBX_NAV_HPOSECEF_UART2</i>	0x20910030	U1	-	-	Output rate of the UBX-NAV-HPOSECEF message on port UART2
<i>CFG-MSGGOUT-UBX_NAV_HPOSECEF_USB</i>	0x20910031	U1	-	-	Output rate of the UBX-NAV-HPOSECEF message on port USB
<i>CFG-MSGGOUT-UBX_NAV_HPOSLLH_I2C</i>	0x20910033	U1	-	-	Output rate of the UBX-NAV-HPOSLLH message on port I2C
<i>CFG-MSGGOUT-UBX_NAV_HPOSLLH_SPI</i>	0x20910037	U1	-	-	Output rate of the UBX-NAV-HPOSLLH message on port SPI
<i>CFG-MSGGOUT-UBX_NAV_HPOSLLH_UART1</i>	0x20910034	U1	-	-	Output rate of the UBX-NAV-HPOSLLH message on port UART1

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-MSGOUT-UBX_NAV_HPPOSLLH_UART2</i>	0x20910035	U1	-	-	Output rate of the UBX-NAV-HPPOSLLH message on port UART2
<i>CFG-MSGOUT-UBX_NAV_HPPOSLLH_USB</i>	0x20910036	U1	-	-	Output rate of the UBX-NAV-HPPOSLLH message on port USB
<i>CFG-MSGOUT-UBX_NAV_ORB_I2C</i>	0x20910010	U1	-	-	Output rate of the UBX-NAV-ORB message on port I2C
<i>CFG-MSGOUT-UBX_NAV_ORB_SPI</i>	0x20910014	U1	-	-	Output rate of the UBX-NAV-ORB message on port SPI
<i>CFG-MSGOUT-UBX_NAV_ORB_UART1</i>	0x20910011	U1	-	-	Output rate of the UBX-NAV-ORB message on port UART1
<i>CFG-MSGOUT-UBX_NAV_ORB_UART2</i>	0x20910012	U1	-	-	Output rate of the UBX-NAV-ORB message on port UART2
<i>CFG-MSGOUT-UBX_NAV_ORB_USB</i>	0x20910013	U1	-	-	Output rate of the UBX-NAV-ORB message on port USB
<i>CFG-MSGOUT-UBX_NAV_POSECEF_I2C</i>	0x20910024	U1	-	-	Output rate of the UBX-NAV-POSECEF message on port I2C
<i>CFG-MSGOUT-UBX_NAV_POSECEF_SPI</i>	0x20910028	U1	-	-	Output rate of the UBX-NAV-POSECEF message on port SPI
<i>CFG-MSGOUT-UBX_NAV_POSECEF_UART1</i>	0x20910025	U1	-	-	Output rate of the UBX-NAV-POSECEF message on port UART1
<i>CFG-MSGOUT-UBX_NAV_POSECEF_UART2</i>	0x20910026	U1	-	-	Output rate of the UBX-NAV-POSECEF message on port UART2
<i>CFG-MSGOUT-UBX_NAV_POSECEF_USB</i>	0x20910027	U1	-	-	Output rate of the UBX-NAV-POSECEF message on port USB
<i>CFG-MSGOUT-UBX_NAV_POSLLH_I2C</i>	0x20910029	U1	-	-	Output rate of the UBX-NAV-POSLLH message on port I2C
<i>CFG-MSGOUT-UBX_NAV_POSLLH_SPI</i>	0x2091002d	U1	-	-	Output rate of the UBX-NAV-POSLLH message on port SPI
<i>CFG-MSGOUT-UBX_NAV_POSLLH_UART1</i>	0x2091002a	U1	-	-	Output rate of the UBX-NAV-POSLLH message on port UART1
<i>CFG-MSGOUT-UBX_NAV_POSLLH_UART2</i>	0x2091002b	U1	-	-	Output rate of the UBX-NAV-POSLLH message on port UART2
<i>CFG-MSGOUT-UBX_NAV_POSLLH_USB</i>	0x2091002c	U1	-	-	Output rate of the UBX-NAV-POSLLH message on port USB
<i>CFG-MSGOUT-UBX_NAV_PVAT_I2C</i>	0x2091062a	U1	-	-	Output rate of the UBX-NAV-PVAT message on port I2C
<i>CFG-MSGOUT-UBX_NAV_PVAT_SPI</i>	0x2091062e	U1	-	-	Output rate of the UBX-NAV-PVAT message on port SPI
<i>CFG-MSGOUT-UBX_NAV_PVAT_UART1</i>	0x2091062b	U1	-	-	Output rate of the UBX-NAV-PVAT message on port UART1
<i>CFG-MSGOUT-UBX_NAV_PVAT_UART2</i>	0x2091062c	U1	-	-	Output rate of the UBX-NAV-PVAT message on port UART2
<i>CFG-MSGOUT-UBX_NAV_PVAT_USB</i>	0x2091062d	U1	-	-	Output rate of the UBX-NAV-PVAT message on port USB
<i>CFG-MSGOUT-UBX_NAV_PVT_I2C</i>	0x20910006	U1	-	-	Output rate of the UBX-NAV-PVT message on port I2C
<i>CFG-MSGOUT-UBX_NAV_PVT_SPI</i>	0x2091000a	U1	-	-	Output rate of the UBX-NAV-PVT message on port SPI
<i>CFG-MSGOUT-UBX_NAV_PVT_UART1</i>	0x20910007	U1	-	-	Output rate of the UBX-NAV-PVT message on port UART1
<i>CFG-MSGOUT-UBX_NAV_PVT_UART2</i>	0x20910008	U1	-	-	Output rate of the UBX-NAV-PVT message on port UART2

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-MSGOUT-UBX_NAV_PVT_USB</i>	0x20910009	U1	-	-	Output rate of the UBX-NAV-PVT message on port USB
<i>CFG-MSGOUT-UBX_NAV_RELPOSND_I2C</i>	0x2091008d	U1	-	-	Output rate of the UBX-NAV-RELPOSND message on port I2C
<i>CFG-MSGOUT-UBX_NAV_RELPOSND_SPI</i>	0x20910091	U1	-	-	Output rate of the UBX-NAV-RELPOSND message on port SPI
<i>CFG-MSGOUT-UBX_NAV_RELPOSND_UART1</i>	0x2091008e	U1	-	-	Output rate of the UBX-NAV-RELPOSND message on port UART1
<i>CFG-MSGOUT-UBX_NAV_RELPOSND_UART2</i>	0x2091008f	U1	-	-	Output rate of the UBX-NAV-RELPOSND message on port UART2
<i>CFG-MSGOUT-UBX_NAV_RELPOSND_USB</i>	0x20910090	U1	-	-	Output rate of the UBX-NAV-RELPOSND message on port USB
<i>CFG-MSGOUT-UBX_NAV_SAT_I2C</i>	0x20910015	U1	-	-	Output rate of the UBX-NAV-SAT message on port I2C
<i>CFG-MSGOUT-UBX_NAV_SAT_SPI</i>	0x20910019	U1	-	-	Output rate of the UBX-NAV-SAT message on port SPI
<i>CFG-MSGOUT-UBX_NAV_SAT_UART1</i>	0x20910016	U1	-	-	Output rate of the UBX-NAV-SAT message on port UART1
<i>CFG-MSGOUT-UBX_NAV_SAT_UART2</i>	0x20910017	U1	-	-	Output rate of the UBX-NAV-SAT message on port UART2
<i>CFG-MSGOUT-UBX_NAV_SAT_USB</i>	0x20910018	U1	-	-	Output rate of the UBX-NAV-SAT message on port USB
<i>CFG-MSGOUT-UBX_NAV_SBAS_I2C</i>	0x2091006a	U1	-	-	Output rate of the UBX-NAV-SBAS message on port I2C
<i>CFG-MSGOUT-UBX_NAV_SBAS_SPI</i>	0x2091006e	U1	-	-	Output rate of the UBX-NAV-SBAS message on port SPI
<i>CFG-MSGOUT-UBX_NAV_SBAS_UART1</i>	0x2091006b	U1	-	-	Output rate of the UBX-NAV-SBAS message on port UART1
<i>CFG-MSGOUT-UBX_NAV_SBAS_UART2</i>	0x2091006c	U1	-	-	Output rate of the UBX-NAV-SBAS message on port UART2
<i>CFG-MSGOUT-UBX_NAV_SBAS_USB</i>	0x2091006d	U1	-	-	Output rate of the UBX-NAV-SBAS message on port USB
<i>CFG-MSGOUT-UBX_NAV_SIG_I2C</i>	0x20910345	U1	-	-	Output rate of the UBX-NAV-SIG message on port I2C
<i>CFG-MSGOUT-UBX_NAV_SIG_SPI</i>	0x20910349	U1	-	-	Output rate of the UBX-NAV-SIG message on port SPI
<i>CFG-MSGOUT-UBX_NAV_SIG_UART1</i>	0x20910346	U1	-	-	Output rate of the UBX-NAV-SIG message on port UART1
<i>CFG-MSGOUT-UBX_NAV_SIG_UART2</i>	0x20910347	U1	-	-	Output rate of the UBX-NAV-SIG message on port UART2
<i>CFG-MSGOUT-UBX_NAV_SIG_USB</i>	0x20910348	U1	-	-	Output rate of the UBX-NAV-SIG message on port USB
<i>CFG-MSGOUT-UBX_NAV_STATUS_I2C</i>	0x2091001a	U1	-	-	Output rate of the UBX-NAV-STATUS message on port I2C
<i>CFG-MSGOUT-UBX_NAV_STATUS_SPI</i>	0x2091001e	U1	-	-	Output rate of the UBX-NAV-STATUS message on port SPI
<i>CFG-MSGOUT-UBX_NAV_STATUS_UART1</i>	0x2091001b	U1	-	-	Output rate of the UBX-NAV-STATUS message on port UART1
<i>CFG-MSGOUT-UBX_NAV_STATUS_UART2</i>	0x2091001c	U1	-	-	Output rate of the UBX-NAV-STATUS message on port UART2
<i>CFG-MSGOUT-UBX_NAV_STATUS_USB</i>	0x2091001d	U1	-	-	Output rate of the UBX-NAV-STATUS message on port USB

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-MSGGOUT-UBX_NAV_TIMEBDS_I2C</i>	0x20910051	U1	-	-	Output rate of the UBX-NAV-TIMEBDS message on port I2C
<i>CFG-MSGGOUT-UBX_NAV_TIMEBDS_SPI</i>	0x20910055	U1	-	-	Output rate of the UBX-NAV-TIMEBDS message on port SPI
<i>CFG-MSGGOUT-UBX_NAV_TIMEBDS_UART1</i>	0x20910052	U1	-	-	Output rate of the UBX-NAV-TIMEBDS message on port UART1
<i>CFG-MSGGOUT-UBX_NAV_TIMEBDS_UART2</i>	0x20910053	U1	-	-	Output rate of the UBX-NAV-TIMEBDS message on port UART2
<i>CFG-MSGGOUT-UBX_NAV_TIMEBDS_USB</i>	0x20910054	U1	-	-	Output rate of the UBX-NAV-TIMEBDS message on port USB
<i>CFG-MSGGOUT-UBX_NAV_TIMEGAL_I2C</i>	0x20910056	U1	-	-	Output rate of the UBX-NAV-TIMEGAL message on port I2C
<i>CFG-MSGGOUT-UBX_NAV_TIMEGAL_SPI</i>	0x2091005a	U1	-	-	Output rate of the UBX-NAV-TIMEGAL message on port SPI
<i>CFG-MSGGOUT-UBX_NAV_TIMEGAL_UART1</i>	0x20910057	U1	-	-	Output rate of the UBX-NAV-TIMEGAL message on port UART1
<i>CFG-MSGGOUT-UBX_NAV_TIMEGAL_UART2</i>	0x20910058	U1	-	-	Output rate of the UBX-NAV-TIMEGAL message on port UART2
<i>CFG-MSGGOUT-UBX_NAV_TIMEGAL_USB</i>	0x20910059	U1	-	-	Output rate of the UBX-NAV-TIMEGAL message on port USB
<i>CFG-MSGGOUT-UBX_NAV_TIMEGLO_I2C</i>	0x2091004c	U1	-	-	Output rate of the UBX-NAV-TIMEGLO message on port I2C
<i>CFG-MSGGOUT-UBX_NAV_TIMEGLO_SPI</i>	0x20910050	U1	-	-	Output rate of the UBX-NAV-TIMEGLO message on port SPI
<i>CFG-MSGGOUT-UBX_NAV_TIMEGLO_UART1</i>	0x2091004d	U1	-	-	Output rate of the UBX-NAV-TIMEGLO message on port UART1
<i>CFG-MSGGOUT-UBX_NAV_TIMEGLO_UART2</i>	0x2091004e	U1	-	-	Output rate of the UBX-NAV-TIMEGLO message on port UART2
<i>CFG-MSGGOUT-UBX_NAV_TIMEGLO_USB</i>	0x2091004f	U1	-	-	Output rate of the UBX-NAV-TIMEGLO message on port USB
<i>CFG-MSGGOUT-UBX_NAV_TIMEGPS_I2C</i>	0x20910047	U1	-	-	Output rate of the UBX-NAV-TIMEGPS message on port I2C
<i>CFG-MSGGOUT-UBX_NAV_TIMEGPS_SPI</i>	0x2091004b	U1	-	-	Output rate of the UBX-NAV-TIMEGPS message on port SPI
<i>CFG-MSGGOUT-UBX_NAV_TIMEGPS_UART1</i>	0x20910048	U1	-	-	Output rate of the UBX-NAV-TIMEGPS message on port UART1
<i>CFG-MSGGOUT-UBX_NAV_TIMEGPS_UART2</i>	0x20910049	U1	-	-	Output rate of the UBX-NAV-TIMEGPS message on port UART2
<i>CFG-MSGGOUT-UBX_NAV_TIMEGPS_USB</i>	0x2091004a	U1	-	-	Output rate of the UBX-NAV-TIMEGPS message on port USB
<i>CFG-MSGGOUT-UBX_NAV_TIMELS_I2C</i>	0x20910060	U1	-	-	Output rate of the UBX-NAV-TIMELS message on port I2C
<i>CFG-MSGGOUT-UBX_NAV_TIMELS_SPI</i>	0x20910064	U1	-	-	Output rate of the UBX-NAV-TIMELS message on port SPI
<i>CFG-MSGGOUT-UBX_NAV_TIMELS_UART1</i>	0x20910061	U1	-	-	Output rate of the UBX-NAV-TIMELS message on port UART1
<i>CFG-MSGGOUT-UBX_NAV_TIMELS_UART2</i>	0x20910062	U1	-	-	Output rate of the UBX-NAV-TIMELS message on port UART2
<i>CFG-MSGGOUT-UBX_NAV_TIMELS_USB</i>	0x20910063	U1	-	-	Output rate of the UBX-NAV-TIMELS message on port USB
<i>CFG-MSGGOUT-UBX_NAV_TIMEUTC_I2C</i>	0x2091005b	U1	-	-	Output rate of the UBX-NAV-TIMEUTC message on port I2C

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-MSGGOUT-UBX_NAV_TIMEUTC_SPI</i>	0x2091005f	U1	-	-	Output rate of the UBX-NAV-TIMEUTC message on port SPI
<i>CFG-MSGGOUT-UBX_NAV_TIMEUTC_UART1</i>	0x2091005c	U1	-	-	Output rate of the UBX-NAV-TIMEUTC message on port UART1
<i>CFG-MSGGOUT-UBX_NAV_TIMEUTC_UART2</i>	0x2091005d	U1	-	-	Output rate of the UBX-NAV-TIMEUTC message on port UART2
<i>CFG-MSGGOUT-UBX_NAV_TIMEUTC_USB</i>	0x2091005e	U1	-	-	Output rate of the UBX-NAV-TIMEUTC message on port USB
<i>CFG-MSGGOUT-UBX_NAV_VELECEF_I2C</i>	0x2091003d	U1	-	-	Output rate of the UBX-NAV-VELECEF message on port I2C
<i>CFG-MSGGOUT-UBX_NAV_VELECEF_SPI</i>	0x20910041	U1	-	-	Output rate of the UBX-NAV-VELECEF message on port SPI
<i>CFG-MSGGOUT-UBX_NAV_VELECEF_UART1</i>	0x2091003e	U1	-	-	Output rate of the UBX-NAV-VELECEF message on port UART1
<i>CFG-MSGGOUT-UBX_NAV_VELECEF_UART2</i>	0x2091003f	U1	-	-	Output rate of the UBX-NAV-VELECEF message on port UART2
<i>CFG-MSGGOUT-UBX_NAV_VELECEF_USB</i>	0x20910040	U1	-	-	Output rate of the UBX-NAV-VELECEF message on port USB
<i>CFG-MSGGOUT-UBX_NAV_VELNED_I2C</i>	0x20910042	U1	-	-	Output rate of the UBX-NAV-VELNED message on port I2C
<i>CFG-MSGGOUT-UBX_NAV_VELNED_SPI</i>	0x20910046	U1	-	-	Output rate of the UBX-NAV-VELNED message on port SPI
<i>CFG-MSGGOUT-UBX_NAV_VELNED_UART1</i>	0x20910043	U1	-	-	Output rate of the UBX-NAV-VELNED message on port UART1
<i>CFG-MSGGOUT-UBX_NAV_VELNED_UART2</i>	0x20910044	U1	-	-	Output rate of the UBX-NAV-VELNED message on port UART2
<i>CFG-MSGGOUT-UBX_NAV_VELNED_USB</i>	0x20910045	U1	-	-	Output rate of the UBX-NAV-VELNED message on port USB
<i>CFG-MSGGOUT-UBX_RXM_MEASX_I2C</i>	0x20910204	U1	-	-	Output rate of the UBX-RXM-MEASX message on port I2C
<i>CFG-MSGGOUT-UBX_RXM_MEASX_SPI</i>	0x20910208	U1	-	-	Output rate of the UBX-RXM-MEASX message on port SPI
<i>CFG-MSGGOUT-UBX_RXM_MEASX_UART1</i>	0x20910205	U1	-	-	Output rate of the UBX-RXM-MEASX message on port UART1
<i>CFG-MSGGOUT-UBX_RXM_MEASX_UART2</i>	0x20910206	U1	-	-	Output rate of the UBX-RXM-MEASX message on port UART2
<i>CFG-MSGGOUT-UBX_RXM_MEASX_USB</i>	0x20910207	U1	-	-	Output rate of the UBX-RXM-MEASX message on port USB
<i>CFG-MSGGOUT-UBX_RXM_RAWX_I2C</i>	0x209102a4	U1	-	-	Output rate of the UBX-RXM-RAWX message on port I2C
<i>CFG-MSGGOUT-UBX_RXM_RAWX_SPI</i>	0x209102a8	U1	-	-	Output rate of the UBX-RXM-RAWX message on port SPI
<i>CFG-MSGGOUT-UBX_RXM_RAWX_UART1</i>	0x209102a5	U1	-	-	Output rate of the UBX-RXM-RAWX message on port UART1
<i>CFG-MSGGOUT-UBX_RXM_RAWX_UART2</i>	0x209102a6	U1	-	-	Output rate of the UBX-RXM-RAWX message on port UART2
<i>CFG-MSGGOUT-UBX_RXM_RAWX_USB</i>	0x209102a7	U1	-	-	Output rate of the UBX-RXM-RAWX message on port USB
<i>CFG-MSGGOUT-UBX_RXM_RLM_I2C</i>	0x2091025e	U1	-	-	Output rate of the UBX-RXM-RLM message on port I2C
<i>CFG-MSGGOUT-UBX_RXM_RLM_SPI</i>	0x20910262	U1	-	-	Output rate of the UBX-RXM-RLM message on port SPI

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-MSGOUT-UBX_RXM_RLM_UART1</i>	0x2091025f	U1	-	-	Output rate of the UBX-RXM-RLM message on port UART1
<i>CFG-MSGOUT-UBX_RXM_RLM_UART2</i>	0x20910260	U1	-	-	Output rate of the UBX-RXM-RLM message on port UART2
<i>CFG-MSGOUT-UBX_RXM_RLM_USB</i>	0x20910261	U1	-	-	Output rate of the UBX-RXM-RLM message on port USB
<i>CFG-MSGOUT-UBX_RXM_RTCM_I2C</i>	0x20910268	U1	-	-	Output rate of the UBX-RXM-RTCM message on port I2C
<i>CFG-MSGOUT-UBX_RXM_RTCM_SPI</i>	0x2091026c	U1	-	-	Output rate of the UBX-RXM-RTCM message on port SPI
<i>CFG-MSGOUT-UBX_RXM_RTCM_UART1</i>	0x20910269	U1	-	-	Output rate of the UBX-RXM-RTCM message on port UART1
<i>CFG-MSGOUT-UBX_RXM_RTCM_UART2</i>	0x2091026a	U1	-	-	Output rate of the UBX-RXM-RTCM message on port UART2
<i>CFG-MSGOUT-UBX_RXM_RTCM_USB</i>	0x2091026b	U1	-	-	Output rate of the UBX-RXM-RTCM message on port USB
<i>CFG-MSGOUT-UBX_RXM_SFRBX_I2C</i>	0x20910231	U1	-	-	Output rate of the UBX-RXM-SFRBX message on port I2C
<i>CFG-MSGOUT-UBX_RXM_SFRBX_SPI</i>	0x20910235	U1	-	-	Output rate of the UBX-RXM-SFRBX message on port SPI
<i>CFG-MSGOUT-UBX_RXM_SFRBX_UART1</i>	0x20910232	U1	-	-	Output rate of the UBX-RXM-SFRBX message on port UART1
<i>CFG-MSGOUT-UBX_RXM_SFRBX_UART2</i>	0x20910233	U1	-	-	Output rate of the UBX-RXM-SFRBX message on port UART2
<i>CFG-MSGOUT-UBX_RXM_SFRBX_USB</i>	0x20910234	U1	-	-	Output rate of the UBX-RXM-SFRBX message on port USB
<i>CFG-MSGOUT-UBX_RXM_SPARTN_I2C</i>	0x20910605	U1	-	-	Output rate of the UBX-RXM-SPARTN message on port I2C
<i>CFG-MSGOUT-UBX_RXM_SPARTN_SPI</i>	0x20910609	U1	-	-	Output rate of the UBX-RXM-SPARTN message on port SPI
<i>CFG-MSGOUT-UBX_RXM_SPARTN_UART1</i>	0x20910606	U1	-	-	Output rate of the UBX-RXM-SPARTN message on port UART1
<i>CFG-MSGOUT-UBX_RXM_SPARTN_UART2</i>	0x20910607	U1	-	-	Output rate of the UBX-RXM-SPARTN message on port UART2
<i>CFG-MSGOUT-UBX_RXM_SPARTN_USB</i>	0x20910608	U1	-	-	Output rate of the UBX-RXM-SPARTN message on port USB
<i>CFG-MSGOUT-UBX_SEC_SIG_I2C</i>	0x20910634	U1	-	-	Output rate of the UBX-DBG-SKYMAP message on port I2C
<i>CFG-MSGOUT-UBX_SEC_SIG_SPI</i>	0x20910638	U1	-	-	Output rate of the UBX-SEC-SIG message on port SPI
<i>CFG-MSGOUT-UBX_SEC_SIG_UART1</i>	0x20910635	U1	-	-	Output rate of the UBX-SEC-SIG message on port UART1
<i>CFG-MSGOUT-UBX_SEC_SIG_UART2</i>	0x20910636	U1	-	-	Output rate of the UBX-SEC-SIG message on port UART2
<i>CFG-MSGOUT-UBX_SEC_SIG_USB</i>	0x20910637	U1	-	-	Output rate of the UBX-SEC-SIG message on port USB
<i>CFG-MSGOUT-UBX_TIM_TM2_I2C</i>	0x20910178	U1	-	-	Output rate of the UBX-TIM-TM2 message on port I2C
<i>CFG-MSGOUT-UBX_TIM_TM2_SPI</i>	0x2091017c	U1	-	-	Output rate of the UBX-TIM-TM2 message on port SPI
<i>CFG-MSGOUT-UBX_TIM_TM2_UART1</i>	0x20910179	U1	-	-	Output rate of the UBX-TIM-TM2 message on port UART1

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-MSGOUT-UBX_TIM_TM2_UART2</i>	0x2091017a	U1	-	-	Output rate of the UBX-TIM-TM2 message on port UART2
<i>CFG-MSGOUT-UBX_TIM_TM2_USB</i>	0x2091017b	U1	-	-	Output rate of the UBX-TIM-TM2 message on port USB
<i>CFG-MSGOUT-UBX_TIM_TP_I2C</i>	0x2091017d	U1	-	-	Output rate of the UBX-TIM-TP message on port I2C
<i>CFG-MSGOUT-UBX_TIM_TP_SPI</i>	0x20910181	U1	-	-	Output rate of the UBX-TIM-TP message on port SPI
<i>CFG-MSGOUT-UBX_TIM_TP_UART1</i>	0x2091017e	U1	-	-	Output rate of the UBX-TIM-TP message on port UART1
<i>CFG-MSGOUT-UBX_TIM_TP_UART2</i>	0x2091017f	U1	-	-	Output rate of the UBX-TIM-TP message on port UART2
<i>CFG-MSGOUT-UBX_TIM_TP_USB</i>	0x20910180	U1	-	-	Output rate of the UBX-TIM-TP message on port USB
<i>CFG-MSGOUT-UBX_TIM_VRFY_I2C</i>	0x20910092	U1	-	-	Output rate of the UBX-TIM-VRFY message on port I2C
<i>CFG-MSGOUT-UBX_TIM_VRFY_SPI</i>	0x20910096	U1	-	-	Output rate of the UBX-TIM-VRFY message on port SPI
<i>CFG-MSGOUT-UBX_TIM_VRFY_UART1</i>	0x20910093	U1	-	-	Output rate of the UBX-TIM-VRFY message on port UART1
<i>CFG-MSGOUT-UBX_TIM_VRFY_UART2</i>	0x20910094	U1	-	-	Output rate of the UBX-TIM-VRFY message on port UART2
<i>CFG-MSGOUT-UBX_TIM_VRFY_USB</i>	0x20910095	U1	-	-	Output rate of the UBX-TIM-VRFY message on port USB

Table 15: CFG-MSGOUT configuration items

6.9.11 CFG-NAVHPG: High precision navigation configuration

This group configures items related to the operation of the receiver in high precision, for example Differential correction and other related features.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-NAVHPG-DGNSSMODE</i>	0x20140011	E1	-	-	Differential corrections mode

See [Table 17](#) below for a list of possible constants for this item.

Table 16: CFG-NAVHPG configuration items

Constant	Value	Description
<i>RTK_FLOAT</i>	2	No attempts made to fix ambiguities
<i>RTK_FIXED</i>	3	Ambiguities are fixed whenever possible

Table 17: Constants for CFG-NAVHPG-DGNSSMODE

6.9.12 CFG-NAVSPG: Standard precision navigation configuration

This group contains configuration items related to the operation of the receiver at standard precision, including configuring position fix mode, ionospheric model selection and other related items.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-NAVSPG-FIXMODE</i>	0x20110011	E1	-	-	Position fix mode
See Table 19 below for a list of possible constants for this item.					
<i>CFG-NAVSPG-INIFIX3D</i>	0x10110013	L	-	-	Initial fix must be a 3D fix
<i>CFG-NAVSPG-WKNROLLOVER</i>	0x30110017	U2	-	-	GPS week rollover number

Configuration item	Key ID	Type	Scale	Unit	Description
GPS week numbers will be set correctly from this week up to 1024 weeks after this week. Range is from 1 to 4096.					
<i>CFG-NAVSPG-UTCSTANDARD</i>	0x2011001c	E1	-	-	UTC standard to be used See section GNSS time base in the integration manual. See Table 20 below for a list of possible constants for this item.
<i>CFG-NAVSPG-DYNMODEL</i>	0x20110021	E1	-	-	Dynamic platform model See Table 21 below for a list of possible constants for this item.
<i>CFG-NAVSPG-ACKAIDING</i>	0x10110025	L	-	-	Acknowledge assistance input messages
<i>CFG-NAVSPG-USE_USRDAT</i>	0x10110061	L	-	-	Use user geodetic datum parameters This must be set together with all CFG-NAVSPG-USERDAT_* parameters.
<i>CFG-NAVSPG-USRDAT_MAJA</i>	0x50110062	R8	-	m	Geodetic datum semi-major axis Accepted range is from 6,300,000.0 to 6,500,000.0 meters This will only be used if CFG-NAVSPG-USE_USERDAT is set. It must be set together with all other CFG-NAVSPG-USERDAT_... parameters.
<i>CFG-NAVSPG-USRDAT_FLAT</i>	0x50110063	R8	-	-	Geodetic datum 1.0 / flattening Accepted range is 0.0 to 500.0. This will only be used if CFG-NAVSPG-USE_USERDAT is set. It must be set together with all other CFG-NAVSPG-USERDAT_... parameters.
<i>CFG-NAVSPG-USRDAT_DX</i>	0x40110064	R4	-	m	Geodetic datum X axis shift at the origin Accepted range is +/- 5000.0 meters. This will only be used if CFG-NAVSPG-USE_USERDAT is set. It must be set together with all other CFG-NAVSPG-USERDAT_... parameters.
<i>CFG-NAVSPG-USRDAT_DY</i>	0x40110065	R4	-	m	Geodetic datum Y axis shift at the origin Accepted range is +/- 5000.0 meters. This will only be used if CFG-NAVSPG-USE_USERDAT is set. It must be set together with all other CFG-NAVSPG-USERDAT_... parameters.
<i>CFG-NAVSPG-USRDAT_DZ</i>	0x40110066	R4	-	m	Geodetic datum Z axis shift at the origin Accepted range is +/- 5000.0 meters. This will only be used if CFG-NAVSPG-USE_USERDAT is set. It must be set together with all other CFG-NAVSPG-USERDAT_... parameters.
<i>CFG-NAVSPG-USRDAT_ROT_X</i>	0x40110067	R4	-	arcsec	Geodetic datum rotation about the X axis Accepted range is +/- 20.0 milli arc seconds. This will only be used if CFG-NAVSPG-USE_USERDAT is set. It must be set together with all other CFG-NAVSPG-USERDAT_... parameters.
<i>CFG-NAVSPG-USRDAT_ROT_Y</i>	0x40110068	R4	-	arcsec	Geodetic datum rotation about the Y axis () Accepted range is +/- 20.0 milli-arc seconds. This will only be used if CFG-NAVSPG-USE_USERDAT is set. It must be set together with all other CFG-NAVSPG-USERDAT_* parameters.
<i>CFG-NAVSPG-USRDAT_ROT_Z</i>	0x40110069	R4	-	arcsec	Geodetic datum rotation about the Z axis Accepted range is +/- 20.0 milli-arc seconds. This will only be used if CFG-NAVSPG-USE_USERDAT is set. It must be set together with all other CFG-NAVSPG-USERDAT_... parameters.
<i>CFG-NAVSPG-USRDAT_SCALE</i>	0x4011006a	R4	-	ppm	Geodetic datum scale factor Accepted range is 0.0 to 50.0 parts per million. This will only be used if CFG-NAVSPG-USE_USERDAT is set. It must be set together with all other CFG-NAVSPG-USERDAT_... parameters.
<i>CFG-NAVSPG-INFIL_MINSVS</i>	0x201100a1	U1	-	-	Minimum number of satellites for navigation

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-NAVSPG-INFIL_MAXSVS</i>	0x201100a2	U1	-	-	Maximum number of satellites for navigation
<i>CFG-NAVSPG-INFIL_MINCNO</i>	0x201100a3	U1	-	dBHz	Minimum satellite signal level for navigation
<i>CFG-NAVSPG-INFIL_MINELEV</i>	0x201100a4	I1	-	deg	Minimum elevation for a GNSS satellite to be used in navigation
<i>CFG-NAVSPG-INFIL_NCNOTHRS</i>	0x201100aa	U1	-	-	Number of satellites required to have C/N0 above <i>CFG-NAVSPG-INFIL_CN0THRS</i> for a fix to be attempted
<i>CFG-NAVSPG-INFIL_CN0THRS</i>	0x201100ab	U1	-	-	C/N0 threshold for deciding whether to attempt a fix
<i>CFG-NAVSPG-OUTFIL_PDOP</i>	0x301100b1	U2	0.1	-	Output filter position DOP mask (threshold)
<i>CFG-NAVSPG-OUTFIL_TDOP</i>	0x301100b2	U2	0.1	-	Output filter time DOP mask (threshold)
<i>CFG-NAVSPG-OUTFIL_PACC</i>	0x301100b3	U2	-	m	Output filter position accuracy mask (threshold)
<i>CFG-NAVSPG-OUTFIL_TACC</i>	0x301100b4	U2	-	m	Output filter time accuracy mask (threshold)
<i>CFG-NAVSPG-OUTFIL_FACC</i>	0x301100b5	U2	0.01	m/s	Output filter frequency accuracy mask (threshold)
<i>CFG-NAVSPG-CONSTR_ALT</i>	0x401100c1	I4	0.01	m	Fixed altitude (mean sea level) for 2D fix mode
<i>CFG-NAVSPG-CONSTR_ALTVAR</i>	0x401100c2	U4	0.0001	m ²	Fixed altitude variance for 2D mode
<i>CFG-NAVSPG-CONSTR_DGNSSSTO</i>	0x201100c4	U1	-	s	DGNSS timeout
<i>CFG-NAVSPG-SIGATTCOMP</i>	0x201100d6	E1	-	-	Permanently attenuated signal compensation mode

See [Table 22](#) below for a list of possible constants for this item.

Table 18: CFG-NAVSPG configuration items

Constant	Value	Description
<i>2DONLY</i>	1	2D only
<i>3DONLY</i>	2	3D only
<i>AUTO</i>	3	Auto 2D/3D

Table 19: Constants for CFG-NAVSPG-FIXMODE

Constant	Value	Description
<i>AUTO</i>	0	Automatic; receiver selects based on GNSS configuration
<i>USNO</i>	3	UTC as operated by the U.S. Naval Observatory (USNO); derived from GPS time
<i>EU</i>	5	UTC as combined from multiple European laboratories; derived from Galileo time
<i>SU</i>	6	UTC as operated by the former Soviet Union (SU); derived from GLONASS time
<i>NTSC</i>	7	UTC as operated by the National Time Service Center (NTSC), China; derived from BeiDou time
<i>NPLI</i>	8	UTC as operated by the National Physics Laboratory, India (NPLI); derived from NavIC time

Table 20: Constants for CFG-NAVSPG-UTCSTANDARD

Constant	Value	Description
<i>PORT</i>	0	Portable
<i>STAT</i>	2	Stationary
<i>PED</i>	3	Pedestrian
<i>AUTOMOT</i>	4	Automotive

Constant	Value	Description
<i>SEA</i>	5	Sea
<i>AIR1</i>	6	Airborne with <1g acceleration
<i>AIR2</i>	7	Airborne with <2g acceleration
<i>AIR4</i>	8	Airborne with <4g acceleration
<i>WRIST</i>	9	Wrist-worn watch (not available in all products)
<i>BIKE</i>	10	Bike (not available in all products)
<i>MOWER</i>	11	Robotic lawn mower (not available in all products)
<i>ESCOOTER</i>	12	E-scooter (not available in all products)

Table 21: Constants for CFG-NAVSPG-DYNMODEL

Constant	Value	Description
<i>DIS</i>	0	Disable signal attenuation compensation
<i>AUTO</i>	255	Automatic signal attenuation compensation
<i>01DBHZ</i>	1	Maximum expected C/NO level is 1 dBHz
<i>02DBHZ</i>	2	Maximum expected C/NO level is 2 dBHz
<i>03DBHZ</i>	3	Maximum expected C/NO level is 3 dBHz
<i>04DBHZ</i>	4	Maximum expected C/NO level is 4 dBHz
<i>05DBHZ</i>	5	Maximum expected C/NO level is 5 dBHz
<i>06DBHZ</i>	6	Maximum expected C/NO level is 6 dBHz
<i>07DBHZ</i>	7	Maximum expected C/NO level is 7 dBHz
<i>08DBHZ</i>	8	Maximum expected C/NO level is 8 dBHz
<i>09DBHZ</i>	9	Maximum expected C/NO level is 9 dBHz
<i>10DBHZ</i>	10	Maximum expected C/NO level is 10 dBHz
<i>11DBHZ</i>	11	Maximum expected C/NO level is 11 dBHz
<i>12DBHZ</i>	12	Maximum expected C/NO level is 12 dBHz
<i>13DBHZ</i>	13	Maximum expected C/NO level is 13 dBHz
<i>14DBHZ</i>	14	Maximum expected C/NO level is 14 dBHz
<i>15DBHZ</i>	15	Maximum expected C/NO level is 15 dBHz
<i>16DBHZ</i>	16	Maximum expected C/NO level is 16 dBHz
<i>17DBHZ</i>	17	Maximum expected C/NO level is 17 dBHz
<i>18DBHZ</i>	18	Maximum expected C/NO level is 18 dBHz
<i>19DBHZ</i>	19	Maximum expected C/NO level is 19 dBHz
<i>20DBHZ</i>	20	Maximum expected C/NO level is 20 dBHz
<i>21DBHZ</i>	21	Maximum expected C/NO level is 21 dBHz
<i>22DBHZ</i>	22	Maximum expected C/NO level is 22 dBHz
<i>23DBHZ</i>	23	Maximum expected C/NO level is 23 dBHz
<i>24DBHZ</i>	24	Maximum expected C/NO level is 24 dBHz
<i>25DBHZ</i>	25	Maximum expected C/NO level is 25 dBHz
<i>26DBHZ</i>	26	Maximum expected C/NO level is 26 dBHz
<i>27DBHZ</i>	27	Maximum expected C/NO level is 27 dBHz
<i>28DBHZ</i>	28	Maximum expected C/NO level is 28 dBHz

Constant	Value	Description
29DBHZ	29	Maximum expected C/NO level is 29 dBHz
30DBHZ	30	Maximum expected C/NO level is 30 dBHz
31DBHZ	31	Maximum expected C/NO level is 31 dBHz
32DBHZ	32	Maximum expected C/NO level is 32 dBHz
33DBHZ	33	Maximum expected C/NO level is 33 dBHz
34DBHZ	34	Maximum expected C/NO level is 34 dBHz
35DBHZ	35	Maximum expected C/NO level is 35 dBHz
36DBHZ	36	Maximum expected C/NO level is 36 dBHz
37DBHZ	37	Maximum expected C/NO level is 37 dBHz
38DBHZ	38	Maximum expected C/NO level is 38 dBHz
39DBHZ	39	Maximum expected C/NO level is 39 dBHz
40DBHZ	40	Maximum expected C/NO level is 40 dBHz
41DBHZ	41	Maximum expected C/NO level is 41 dBHz
42DBHZ	42	Maximum expected C/NO level is 42 dBHz
43DBHZ	43	Maximum expected C/NO level is 43 dBHz
44DBHZ	44	Maximum expected C/NO level is 44 dBHz
45DBHZ	45	Maximum expected C/NO level is 45 dBHz
46DBHZ	46	Maximum expected C/NO level is 46 dBHz
47DBHZ	47	Maximum expected C/NO level is 47 dBHz
48DBHZ	48	Maximum expected C/NO level is 48 dBHz
49DBHZ	49	Maximum expected C/NO level is 49 dBHz
50DBHZ	50	Maximum expected C/NO level is 50 dBHz
51DBHZ	51	Maximum expected C/NO level is 51 dBHz
52DBHZ	52	Maximum expected C/NO level is 52 dBHz
53DBHZ	53	Maximum expected C/NO level is 53 dBHz
54DBHZ	54	Maximum expected C/NO level is 54 dBHz
55DBHZ	55	Maximum expected C/NO level is 55 dBHz
56DBHZ	56	Maximum expected C/NO level is 56 dBHz
57DBHZ	57	Maximum expected C/NO level is 57 dBHz
58DBHZ	58	Maximum expected C/NO level is 58 dBHz
59DBHZ	59	Maximum expected C/NO level is 59 dBHz
60DBHZ	60	Maximum expected C/NO level is 60 dBHz
61DBHZ	61	Maximum expected C/NO level is 61 dBHz
62DBHZ	62	Maximum expected C/NO level is 62 dBHz
63DBHZ	63	Maximum expected C/NO level is 63 dBHz

Table 22: Constants for CFG-NAVSPG-SIGATTCOMP

6.9.13 CFG-NMEA: NMEA protocol configuration

This group configures the [NMEA protocol](#). See section [NMEA protocol configuration](#) for a detailed description of the configuration effects on NMEA output.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-NMEA-PROTVR</i>	0x20930001	E1	-	-	NMEA protocol version See Table 24 below for a list of possible constants for this item.
<i>CFG-NMEA-MAXSVS</i>	0x20930002	E1	-	-	Maximum number of SVs to report per Talker ID See Table 25 below for a list of possible constants for this item.
<i>CFG-NMEA-COMPAT</i>	0x10930003	L	-	-	Enable compatibility mode This might be needed for certain applications, e.g. for an NMEA parser that expects a fixed number of digits in position coordinates.
<i>CFG-NMEA-CONSIDER</i>	0x10930004	L	-	-	Enable considering mode This will affect NMEA output used satellite count. If set, also considered satellites (e.g. RAIMED) are counted as used satellites as well.
<i>CFG-NMEA-LIMIT82</i>	0x10930005	L	-	-	Enable strict limit to 82 characters maximum NMEA message length
<i>CFG-NMEA-HIGHPREC</i>	0x10930006	L	-	-	Enable high precision mode This flag cannot be set in conjunction with either <i>CFG-NMEA-COMPAT</i> or <i>CFG-NMEA-LIMIT82</i> mode.
<i>CFG-NMEA-SVNUMBERING</i>	0x20930007	E1	-	-	Display configuration for SVs that do not have value defined in NMEA Configures the display of satellites that do not have an NMEA-defined value. Note: this does not apply to satellites with an unknown ID. See also Satellite Numbering . See Table 26 below for a list of possible constants for this item.
<i>CFG-NMEA-FILT_GPS</i>	0x10930011	L	-	-	Disable reporting of GPS satellites
<i>CFG-NMEA-FILT_SBAS</i>	0x10930012	L	-	-	Disable reporting of SBAS satellites
<i>CFG-NMEA-FILT_GAL</i>	0x10930013	L	-	-	Disable reporting of Galileo satellites
<i>CFG-NMEA-FILT_QZSS</i>	0x10930015	L	-	-	Disable reporting of QZSS satellites
<i>CFG-NMEA-FILT_GLO</i>	0x10930016	L	-	-	Disable reporting of GLONASS satellites
<i>CFG-NMEA-FILT_BDS</i>	0x10930017	L	-	-	Disable reporting of BeiDou satellites
<i>CFG-NMEA-OUT_INVFIX</i>	0x10930021	L	-	-	Enable position output for failed or invalid fixes
<i>CFG-NMEA-OUT_MSKFIX</i>	0x10930022	L	-	-	Enable position output for invalid fixes
<i>CFG-NMEA-OUT_INVTIME</i>	0x10930023	L	-	-	Enable time output for invalid times
<i>CFG-NMEA-OUT_INVDATE</i>	0x10930024	L	-	-	Enable date output for invalid dates
<i>CFG-NMEA-OUT_ONLYGPS</i>	0x10930025	L	-	-	Restrict output to GPS satellites only
<i>CFG-NMEA-OUT_FROZENCOG</i>	0x10930026	L	-	-	Enable course over ground output even if it is frozen
<i>CFG-NMEA-MAINTALKERID</i>	0x20930031	E1	-	-	Main Talker ID By default the main Talker ID (i.e. the Talker ID used for all messages other than GSV) is determined by the GNSS assignment of the receiver's channels (see CFG-SIGNAL). This field enables the main Talker ID to be overridden. See Table 27 below for a list of possible constants for this item.
<i>CFG-NMEA-GSVTALKERID</i>	0x20930032	E1	-	-	Talker ID for GSV NMEA messages By default the Talker ID for GSV messages is GNSS-specific (as defined by NMEA). This field enables the GSV Talker ID to be overridden. See Table 28 below for a list of possible constants for this item.
<i>CFG-NMEA-BDSTALKERID</i>	0x30930033	U2	-	-	BeiDou Talker ID

Configuration item	Key ID	Type	Scale	Unit	Description
Sets the two ASCII characters that should be used for the BeiDou Talker ID.					
If these are set to zero, the default BeiDou Talker ID will be used.					

Table 23: CFG-NMEA configuration items

Constant	Value	Description
V21	21	NMEA protocol version 2.1
V23	23	NMEA protocol version 2.3
V40	40	NMEA protocol version 4.0 (not available in all products)
V41	41	NMEA protocol version 4.10 (not available in all products)
V411	42	NMEA protocol version 4.11 (not available in all products)

Table 24: Constants for CFG-NMEA-PROTVR

Constant	Value	Description
UNLIM	0	Unlimited
8SVS	8	8 SVs
12SVS	12	12 SVs
16SVS	16	16 SVs

Table 25: Constants for CFG-NMEA-MAXSVS

Constant	Value	Description
STRICT	0	Strict - satellites are not output
EXTENDED	1	Extended - use proprietary numbering

Table 26: Constants for CFG-NMEA-SVNUMBERING

Constant	Value	Description
AUTO	0	Main Talker ID is not overridden
GP	1	Set main Talker ID to 'GP'
GL	2	Set main Talker ID to 'GL'
GN	3	Set main Talker ID to 'GN'
GA	4	Set main Talker ID to 'GA' (not available in all products)
GB	5	Set main Talker ID to 'GB' (not available in all products)
GQ	7	Set main Talker ID to 'GQ' (not available in all products)

Table 27: Constants for CFG-NMEA-MAINTALKERID

Constant	Value	Description
GNSS	0	Use GNSS-specific Talker ID (as defined by NMEA)
MAIN	1	Use the main Talker ID

Table 28: Constants for CFG-NMEA-GSVTALKERID

6.9.14 CFG-RATE: Navigation and measurement rate configuration

The configuration items in this group allow the user to alter the rate at which navigation solutions (and the measurements that they depend on) are generated by the receiver. The calculation of the navigation solution will always be aligned to the top of a second zero (first second of the week) of the configured reference time system. The navigation period is an integer multiple of the measurement period.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-RATE-MEAS</i>	0x30210001	U2	0.001	s	Nominal time between GNSS measurements E.g. 100 ms results in 10 Hz measurement rate, 1000 ms = 1 Hz measurement rate. The minimum value is 25.
<i>CFG-RATE-NAV</i>	0x30210002	U2	-	-	Ratio of number of measurements to number of navigation solutions E.g. 5 means five measurements for every navigation solution. The minimum value is 1. The maximum value is 127.
<i>CFG-RATE-TIMEREF</i>	0x20210003	E1	-	-	Time system to which measurements are aligned See Table 30 below for a list of possible constants for this item.
<i>CFG-RATE-NAV_PRIO</i>	0x20210004	U1	-	Hz	Output rate of priority navigation mode messages When not zero, the receiver outputs navigation data as a set of messages with two priority levels: 1) <i>Priority messages</i> : Navigation solution data are computed and output with high rate and low latency; 2) <i>Non-priority messages</i> auxiliary navigation data are computed and output with low rate and higher latency. When zero, the receiver outputs the navigation data as a set of messages with the same priority. The <i>priority messages</i> are: UBX-NAV-PVT, UBX-NAV-POSECEF, UBX-NAV-POSLLH, UBX-NAV-VELECEF, UBX-NAV-VELNED, UBX-NAV-HPPOSECEF, UBX-NAV-HPPOSLLH, UBX-ESF-INS, UBX-NAV-ATT, UBX-NAV-PVAT, NMEA-Standard-DTM, NMEA-Standard-RMC, NMEA-Standard-VTG, NMEA-Standard-GNS, NMEA-Standard-GGA, NMEA-Standard-GLL, NMEA-Standard-THS and NMEA-PUBX-POSITION. Note that some of these messages are not available on some products. The allowed range for the priority navigation mode is 0-30 Hz. See section Priority navigation mode in the integration manual.

Table 29: CFG-RATE configuration items

Constant	Value	Description
<i>UTC</i>	0	Align measurements to UTC time
<i>GPS</i>	1	Align measurements to GPS time
<i>GLO</i>	2	Align measurements to GLONASS time
<i>BDS</i>	3	Align measurements to BeiDou time
<i>GAL</i>	4	Align measurements to Galileo time
<i>NAVIC</i>	5	Align measurements to NavIC time

Table 30: Constants for CFG-RATE-TIMEREF

6.9.15 CFG-RINV: Remote inventory

The remote inventory enables storing user-defined data in the non-volatile memory of the receiver. The data can be either binary or a string of ASCII characters. In the latter case, it can optionally be output at startup after the boot screen.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-RINV-DUMP</i>	0x10c70001	L	-	-	Dump data at startup When true, data will be dumped to the interface on startup, unless CFG-RINV-BINARY is set.
<i>CFG-RINV-BINARY</i>	0x10c70002	L	-	-	Data is binary When true, the data is treated as binary data.
<i>CFG-RINV-DATA_SIZE</i>	0x20c70003	U1	-	-	Size of data Size of data to store/be stored in the remote inventory (maximum 30 bytes).
<i>CFG-RINV-CHUNK0</i>	0x50c70004	X8	-	-	Data bytes 1-8 (LSB) Data to store/be stored in remote inventory - max 8 bytes, left-most in LSB, e.g. string ABCD will appear as 0x44434241.
<i>CFG-RINV-CHUNK1</i>	0x50c70005	X8	-	-	Data bytes 9-16 Data to store/be stored in remote inventory - max 8 bytes, left-most in LSB, e.g. string ABCD will appear as 0x44434241.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-RINV-CHUNK2</i>	0x50c70006	X8	-	-	Data bytes 17-24 Data to store/be stored in remote inventory - max 8 bytes, left-most in LSB, e.g. string ABCD will appear as 0x44434241.
<i>CFG-RINV-CHUNK3</i>	0x50c70007	X8	-	-	Data bytes 25-30 (MSB) Data to store/be stored in remote inventory - max 6 bytes, left-most in LSB, e.g. string ABCD will appear as 0x44434241.

Table 31: CFG-RINV configuration items

6.9.16 CFG-RTCM: RTCM protocol configuration

Configures the RTCM protocol.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-RTCM-DF003_IN</i>	0x30090008	U2	-	-	RTCM DF003 (Reference station ID) input value Value to use for filtering out RTCM input messages based on their DF003 data field (Reference station ID) value. To be used in conjunction with CFG-RTCM-DF003_IN_FILTER. The value can be 0..4095.
<i>CFG-RTCM-DF003_IN_FILTER</i>	0x20090009	E1	-	-	RTCM input filter configuration based on RTCM DF003 (Reference station ID) value Configures if and how the filtering out of RTCM input messages based on their DF003 data field (Reference station ID) operates. See Table 33 below for a list of possible constants for this item.

Table 32: CFG-RTCM configuration items

Constant	Value	Description
<i>DISABLED</i>	0	Disabled RTCM input filter; all input messages allowed
<i>RELAXED</i>	1	Relaxed RTCM input filter; input messages allowed must contain a DF003 data field matching the CFG-RTCM-DF003_IN value or not contain by specification the DF003 data field
<i>STRICT</i>	2	Strict RTCM input filter; input messages allowed must contain a DF003 data field matching the CFG-RTCM-DF003 value

Table 33: Constants for CFG-RTCM-DF003_IN_FILTER

6.9.17 CFG-SBAS: SBAS configuration

This group configures the SBAS receiver subsystem (i.e. WAAS, EGNOS, MSAS). See SBAS configuration settings description in the integration manual for a detailed description of how these settings affect receiver operation.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-SBAS-USE_TESTMODE</i>	0x10360002	L	-	-	Use SBAS data when it is in test mode (SBAS msg 0)
<i>CFG-SBAS-USE_RANGING</i>	0x10360003	L	-	-	Use SBAS GEOs as a ranging source (for navigation)
<i>CFG-SBAS-USE_DIFFCORR</i>	0x10360004	L	-	-	Use SBAS differential corrections
<i>CFG-SBAS-USE_INTEGRITY</i>	0x10360005	L	-	-	Use SBAS integrity information If enabled, the receiver will only use GPS satellites for which integrity information is available
<i>CFG-SBAS-PRNSCANMASK</i>	0x50360006	X8	-	-	SBAS PRN search configuration This configuration item determines which SBAS PRNs should be searched. Setting it to 0 indicates auto-scanning all SBAS PRNs. For non-zero values the bits correspond to the allocated SBAS PRNs ranging from PRN120 (bit 0) to PRN158 (bit 38), where a bit set enables searching for the corresponding PRN. See Table 35 below for a list of possible constants for this item.

Table 34: CFG-SBAS configuration items

Constant	Value	Description
ALL	0x0000000000000000	Enable search for all SBAS PRNs
PRN120	0x0000000000000001	Enable search for SBAS PRN120
PRN121	0x0000000000000002	Enable search for SBAS PRN121
PRN122	0x0000000000000004	Enable search for SBAS PRN122
PRN123	0x0000000000000008	Enable search for SBAS PRN123
PRN124	0x0000000000000010	Enable search for SBAS PRN124
PRN125	0x0000000000000020	Enable search for SBAS PRN125
PRN126	0x0000000000000040	Enable search for SBAS PRN126
PRN127	0x0000000000000080	Enable search for SBAS PRN127
PRN128	0x0000000000000100	Enable search for SBAS PRN128
PRN129	0x0000000000000200	Enable search for SBAS PRN129
PRN130	0x0000000000000400	Enable search for SBAS PRN130
PRN131	0x0000000000000800	Enable search for SBAS PRN131
PRN132	0x0000000000001000	Enable search for SBAS PRN132
PRN133	0x0000000000002000	Enable search for SBAS PRN133
PRN134	0x0000000000004000	Enable search for SBAS PRN134
PRN135	0x0000000000008000	Enable search for SBAS PRN135
PRN136	0x0000000000010000	Enable search for SBAS PRN136
PRN137	0x0000000000020000	Enable search for SBAS PRN137
PRN138	0x0000000000040000	Enable search for SBAS PRN138
PRN139	0x0000000000080000	Enable search for SBAS PRN139
PRN140	0x0000000000100000	Enable search for SBAS PRN140
PRN141	0x0000000000200000	Enable search for SBAS PRN141
PRN142	0x0000000000400000	Enable search for SBAS PRN142
PRN143	0x0000000000800000	Enable search for SBAS PRN143
PRN144	0x0000000001000000	Enable search for SBAS PRN144
PRN145	0x0000000002000000	Enable search for SBAS PRN145
PRN146	0x0000000004000000	Enable search for SBAS PRN146
PRN147	0x0000000008000000	Enable search for SBAS PRN147
PRN148	0x0000000010000000	Enable search for SBAS PRN148
PRN149	0x0000000020000000	Enable search for SBAS PRN149
PRN150	0x0000000040000000	Enable search for SBAS PRN150
PRN151	0x0000000080000000	Enable search for SBAS PRN151
PRN152	0x0000000100000000	Enable search for SBAS PRN152
PRN153	0x0000000200000000	Enable search for SBAS PRN153
PRN154	0x0000000400000000	Enable search for SBAS PRN154
PRN155	0x0000000800000000	Enable search for SBAS PRN155
PRN156	0x0000001000000000	Enable search for SBAS PRN156
PRN157	0x0000002000000000	Enable search for SBAS PRN157

Constant	Value	Description
PRN158	0x0000004000000000	Enable search for SBAS PRN158

Table 35: Constants for CFG-SBAS-PRNSCANMASK

6.9.18 CFG-SEC: Security configuration

Security configuration.

Configuration item	Key ID	Type	Scale	Unit	Description
CFG-SEC-CFG_LOCK	0x10f60009	L	-	-	Configuration lockdown When set, receiver configuration is locked and cannot be changed any more.
CFG-SEC-CFG_LOCK_UNLOCKGRP1	0x30f6000a	U2	-	-	Configuration lockdown exempted group 1 This item can be set before enabling the configuration lockdown. It will make writes to the specified group possible after the configuration lockdown has been enabled.
CFG-SEC-CFG_LOCK_UNLOCKGRP2	0x30f6000b	U2	-	-	Configuration lockdown exempted group 2 This item can be set before enabling the configuration lockdown. It will make writes to the specified group possible after the configuration lockdown has been enabled.

Table 36: CFG-SEC configuration items

6.9.19 CFG-SFCORE: Sensor fusion (SF) core configuration

This group contains configuration items for dead reckoning (DR) products.

More details on the configuration parameters can be found in the ADR section of the integration manual.

Configuration item	Key ID	Type	Scale	Unit	Description
CFG-SFCORE-USE_SF	0x10080001	L	-	-	Use ADR/UDR sensor fusion

Table 37: CFG-SFCORE configuration items

6.9.20 CFG-SFIMU: Sensor fusion (SF) inertial measurement unit (IMU) configuration

This group contains configuration items related to the Inertial Measurement Unit (IMU) for Dead Reckoning (DR) products.

More details on the configuration parameters can be found in the sensor fusion sections of the integration manual.

Configuration item	Key ID	Type	Scale	Unit	Description
CFG-SFIMU-GYRO_TC_UPDATE_PERIOD	0x30060007	U2	-	s	Time period between each update for the saved temperature-dependent gyroscope bias table
CFG-SFIMU-GYRO_RMSTHDL	0x20060008	U1	2 ⁻⁸	deg/s	Gyroscope sensor RMS threshold Gyroscope sensor RMS threshold below which automatically estimated gyroscope noise-level (accuracy) is updated.
CFG-SFIMU-GYRO_FREQUENCY	0x20060009	U1	-	Hz	Nominal gyroscope sensor data sampling frequency
CFG-SFIMU-GYRO_LATENCY	0x3006000a	U2	-	ms	Gyroscope sensor data latency due to e.g. CAN bus
CFG-SFIMU-GYRO_ACCURACY	0x3006000b	U2	1e-3	deg/s	Gyroscope sensor data accuracy Accuracy of gyroscope sensor data. If GYRO_ACCURACY is not set, the accuracy is estimated automatically.
CFG-SFIMU-ACCEL_RMSTHDL	0x20060015	U1	2 ⁻⁶	m/s ²	Accelerometer RMS threshold Accelerometer RMS threshold below which automatically estimated accelerometer noise-level (accuracy) is updated.
CFG-SFIMU-ACCEL_FREQUENCY	0x20060016	U1	-	Hz	Nominal accelerometer sensor data sampling frequency

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-SFIMU-ACCEL_LATENCY</i>	0x30060017	U2	-	ms	Accelerometer sensor data latency due to e.g. CAN bus
<i>CFG-SFIMU-ACCEL_ACCURACY</i>	0x30060018	U2	1e-4	m/s ²	Accelerometer sensor data accuracy Accuracy of accelerometer sensor data. If ACCEL_ACCURACY is not set, the accuracy is estimated automatically.
<i>CFG-SFIMU-IMU_EN</i>	0x1006001d	L	-	-	IMU enabled Flag indicating that IMU is connected to the sensor I2C.
<i>CFG-SFIMU-IMU_I2C_SCL_PIO</i>	0x2006001e	U1	-	-	SCL PIO of the IMU I2C IMU I2C SCL PIO number that should be used by the FW for communication with the sensor.
<i>CFG-SFIMU-IMU_I2C_SDA_PIO</i>	0x2006001f	U1	-	-	SDA PIO of the IMU I2C IMU I2C SDA PIO number that should be used by the FW for communication with the sensor.
<i>CFG-SFIMU-AUTO_MNTALG_ENA</i>	0x10060027	L	-	-	Enable automatic IMU-mount alignment Enable automatic IMU-mount alignment. This flag can only be used with modules containing an internal IMU.
<i>CFG-SFIMU-IMU_MNTALG_YAW</i>	0x4006002d	U4	1e-2	deg	User-defined IMU-mount yaw angle [0, 36000] User-defined IMU-mount yaw angle, e.g. for 60.00 degree yaw angle the configured value would be 6000.
<i>CFG-SFIMU-IMU_MNTALG_PITCH</i>	0x3006002e	I2	1e-2	deg	User-defined IMU-mount pitch angle [-9000, 9000] User-defined IMU-mount pitch angle, e.g. for 60.00 degree pitch angle the configured value would be 6000.
<i>CFG-SFIMU-IMU_MNTALG_ROLL</i>	0x3006002f	I2	1e-2	deg	User-defined IMU-mount roll angle [-18000, 18000] User-defined IMU-mount roll angle, e.g. for 60.00 degree roll angle the configured value would be 6000.

Table 38: CFG-SFIMU configuration items

6.9.21 CFG-SFODO: Sensor fusion (SF) odometer configuration

This group contains configuration items related to odometer sensors for Dead Reckoning (DR) products.

More details on the configuration parameters can be found in the ADR section of the integration manual.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-SFODO-COMBINE_TICKS</i>	0x10070001	L	-	-	Use combined rear wheel ticks instead of the single tick
<i>CFG-SFODO-USE_SPEED</i>	0x10070003	L	-	-	Use speed measurements Use speed measurements (data type 11 in ESF-MEAS) instead of single ticks (data type 10)
<i>CFG-SFODO-DIS_AUTOCOUNTMAX</i>	0x10070004	L	-	-	Disable automatic estimation of maximum absolute wheel tick counter Disable automatic estimation of maximum absolute wheel tick counter value. See CFG-SFODO-COUNT_MAX item description for more details.
<i>CFG-SFODO-DIS_AUTODIRPINPOL</i>	0x10070005	L	-	-	Disable automatic wheel tick direction pin polarity detection Disable automatic wheel tick direction pin polarity detection. See CFG-SFODO-DIR_PINPOL item description for more details.
<i>CFG-SFODO-DIS_AUTOSPEED</i>	0x10070006	L	-	-	Disable automatic receiver reconfiguration for processing speed data instead of wheel tick data Disable automatic receiver reconfiguration for processing speed data instead of wheel tick data if no wheel tick data is available but speed data were detected. See CFG-SFODO-USE_SPEED item description for more details.
<i>CFG-SFODO-FACTOR</i>	0x40070007	U4	1e-6	-	Wheel tick scale factor Wheel tick scale factor to obtain distance [m] from wheel ticks.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-SFODO-QUANT_ERROR</i>	0x40070008	U4	1e-6	m (or m/s)	Wheel tick quantization Wheel tick quantization. If <i>CFG-SFODO-USE_SPEED</i> is set then this is interpreted as the speed measurement error RMS.
<i>CFG-SFODO-COUNT_MAX</i>	0x40070009	U4	-	-	Wheel tick counter maximum value Wheel tick counter maximum value (rollover - 1). If null, relative wheel tick counts are assumed (and therefore no rollover). If not zero, absolute wheel tick counts are assumed and the value corresponds to the highest tick count value before rollover happens. If <i>CFG-SFODO-USE_SPEED</i> is set then this value is ignored. If value is set to 1, absolute wheel tick counts are assumed and the value will be automatically calculated if possible. It is only possible for automatic calibration to calculate wheel tick counter maximum value if it can be represented as a number of set bits (i.e. 2^N). If it cannot be represented in this way it must be set to the correct absolute tick value manually.
<i>CFG-SFODO-LATENCY</i>	0x3007000a	U2	-	ms	Wheel tick data latency due to e.g. CAN bus
<i>CFG-SFODO-FREQUENCY</i>	0x2007000b	U1	-	Hz	Nominal wheel tick data frequency (0 = not set)
<i>CFG-SFODO-CNT_BOTH_EDGES</i>	0x1007000d	L	-	-	Count both rising and falling edges on wheel tick signal Count both rising and falling edges on wheel tick signal (only relevant if wheel tick is measured by the u-blox receiver). <i>Only turn on this feature if the wheel tick signal has 50 % duty cycle. Turning on this feature with fixed-width pulses can lead to severe degradation of performance.</i> Use wheel tick pin for speed measurement. This field can only be used with modules supporting analog wheel tick signals.
<i>CFG-SFODO-SPEED_BAND</i>	0x3007000e	U2	-	cm/s	Speed sensor dead band (0 = not set)
<i>CFG-SFODO-USE_WT_PIN</i>	0x1007000f	L	-	-	Wheel tick signal enabled Flag indicating that wheel tick signal is connected.
<i>CFG-SFODO-DIR_PINPOL</i>	0x10070010	L	-	-	Wheel tick direction pin polarity 0 : Pin high means forwards direction 1 : Pin high means backwards direction
<i>CFG-SFODO-DIS_AUTOSW</i>	0x10070011	L	-	-	Disable automatic use of wheel tick or speed data received over the software interface Disable automatic use of wheel tick or speed data received over the software interface if available. In this case, data coming from the hardware interface (wheel tick pins) will automatically be ignored if wheel tick/speed data are available from the software interface. See <i>CFG-SFODO-USE_WT_PIN</i> description for more details.

Table 39: CFG-SFODO configuration items

6.9.22 CFG-SIGNAL: Satellite systems (GNSS) signal configuration

The enable items for individual signals are governed by their corresponding constellation enable item. It is necessary that at least one signal from a major GNSS constellation is enabled. See GNSS signal configuration in the integration manual for more details.

Configuration specific to a GNSS system is available in other groups (e.g. CFG-SBAS).

Note that changes to any items within this group will trigger a reset to the GNSS subsystem.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-SIGNAL-GPS_ENA</i>	0x1031001f	L	-	-	GPS enable
<i>CFG-SIGNAL-GPS_L1CA_ENA</i>	0x10310001	L	-	-	GPS L1C/A
<i>CFG-SIGNAL-GPS_L2C_ENA</i>	0x10310003	L	-	-	GPS L2C (only on u-blox F9 platform products)
<i>CFG-SIGNAL-SBAS_ENA</i>	0x10310020	L	-	-	SBAS enable
<i>CFG-SIGNAL-SBAS_L1CA_ENA</i>	0x10310005	L	-	-	SBAS L1C/A
<i>CFG-SIGNAL-GAL_ENA</i>	0x10310021	L	-	-	Galileo enable
<i>CFG-SIGNAL-GAL_E1_ENA</i>	0x10310007	L	-	-	Galileo E1

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-SIGNAL-GAL_E5B_ENA</i>	0x1031000a	L	-	-	Galileo E5b (only on u-blox F9 platform products)
<i>CFG-SIGNAL-BDS_ENA</i>	0x10310022	L	-	-	BeiDou Enable
<i>CFG-SIGNAL-BDS_B1_ENA</i>	0x1031000d	L	-	-	BeiDou B1I
<i>CFG-SIGNAL-BDS_B2_ENA</i>	0x1031000e	L	-	-	BeiDou B2I (only on u-blox F9 platform products)
<i>CFG-SIGNAL-QZSS_ENA</i>	0x10310024	L	-	-	QZSS enable
<i>CFG-SIGNAL-QZSS_L1CA_ENA</i>	0x10310012	L	-	-	QZSS L1C/A
<i>CFG-SIGNAL-QZSS_L2C_ENA</i>	0x10310015	L	-	-	QZSS L2C (only on u-blox F9 platform products)
<i>CFG-SIGNAL-GLO_ENA</i>	0x10310025	L	-	-	GLONASS enable
<i>CFG-SIGNAL-GLO_L1_ENA</i>	0x10310018	L	-	-	GLONASS L1
<i>CFG-SIGNAL-GLO_L2_ENA</i>	0x1031001a	L	-	-	GLONASS L2 (only on u-blox F9 platform products)

Table 40: CFG-SIGNAL configuration items

6.9.23 CFG-SPI: Configuration of the SPI interface

Settings needed to configure the SPI communication interface.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-SPI-MAXFF</i>	0x20640001	U1	-	-	Number of bytes containing 0xFF to receive before switching off reception. Range: 0 (mechanism off) - 63
<i>CFG-SPI-CPOLARITY</i>	0x10640002	L	-	-	Clock polarity select: 0: Active High Clock, SCLK idles low, 1: Active Low Clock, SCLK idles high
<i>CFG-SPI-CPHASE</i>	0x10640003	L	-	-	Clock phase select: 0: Data captured on first edge of SCLK, 1: Data captured on second edge of SCLK
<i>CFG-SPI-EXTENDEDTIMEOUT</i>	0x10640005	L	-	-	Flag to disable timeouting the interface after 1.5s
<i>CFG-SPI-ENABLED</i>	0x10640006	L	-	-	Flag to indicate if the SPI interface should be enabled

Table 41: CFG-SPI configuration items

6.9.24 CFG-SPIINPROT: Input protocol configuration of the SPI interface

Input protocol enable flags of the SPI interface.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-SPIINPROT-UBX</i>	0x10790001	L	-	-	Flag to indicate if UBX should be an input protocol on SPI
<i>CFG-SPIINPROT-NMEA</i>	0x10790002	L	-	-	Flag to indicate if NMEA should be an input protocol on SPI
<i>CFG-SPIINPROT-RTCM3X</i>	0x10790004	L	-	-	Flag to indicate if RTCM3X should be an input protocol on SPI
<i>CFG-SPIINPROT-SPARTN</i>	0x10790005	L	-	-	Flag to indicate if SPARTN should be an input protocol on SPI

Table 42: CFG-SPIINPROT configuration items

6.9.25 CFG-SPIOUTPROT: Output protocol configuration of the SPI interface

Output protocol enable flags of the SPI interface.

Configuration item	Key ID	Type	Scale	Unit	Description
CFG-SPIOUTPROT-UBX	0x107a0001	L	-	-	Flag to indicate if UBX should be an output protocol on SPI
CFG-SPIOUTPROT-NMEA	0x107a0002	L	-	-	Flag to indicate if NMEA should be an output protocol on SPI

Table 43: CFG-SPIOUTPROT configuration items

6.9.26 CFG-TP: Timepulse configuration

Use this group to configure the generation of timepulses.

Configuration item	Key ID	Type	Scale	Unit	Description
CFG-TP-PULSE_DEF	0x20050023	E1	-	-	Determines whether the time pulse is interpreted as frequency or period
See Table 45 below for a list of possible constants for this item.					
CFG-TP-PULSE_LENGTH_DEF	0x20050030	E1	-	-	Determines whether the time pulse length is interpreted as length[us] or pulse ratio[%]
See Table 46 below for a list of possible constants for this item.					
CFG-TP-ANT_CABLEDELAY	0x30050001	I2	1e-9	s	Antenna cable delay
CFG-TP-PERIOD_TP1	0x40050002	U4	1e-6	s	Time pulse period (TP1)
CFG-TP-PERIOD_LOCK_TP1	0x40050003	U4	1e-6	s	Time pulse period when locked to GNSS time (TP1)
Only used if CFG-TP-USE_LOCKED_TP1 is set.					
CFG-TP-FREQ_TP1	0x40050024	U4	-	Hz	Time pulse frequency (TP1)
This will only be used if CFG-TP-PULSE_DEF=FREQ.					
CFG-TP-FREQ_LOCK_TP1	0x40050025	U4	-	Hz	Time pulse frequency when locked to GNSS time (TP1)
Only used if CFG-TP-USE_LOCKED_TP1 is set.					
CFG-TP-LEN_TP1	0x40050004	U4	1e-6	s	Time pulse length (TP1)
CFG-TP-LEN_LOCK_TP1	0x40050005	U4	1e-6	s	Time pulse length when locked to GNSS time (TP1)
Only used if CFG-TP-USE_LOCKED_TP1 is set.					
CFG-TP-DUTY_TP1	0x5005002a	R8	-	%	Time pulse duty cycle (TP1)
Only used if CFG-TP-PULSE_LENGTH_DEF=RATIO is set.					
CFG-TP-DUTY_LOCK_TP1	0x5005002b	R8	-	%	Time pulse duty cycle when locked to GNSS time (TP1)
Only used if CFG-TP-PULSE_LENGTH_DEF=RATIO and CFG-TP-USE_LOCKED_TP1 are set.					
CFG-TP-USER_DELAY_TP1	0x40050006	I4	1e-9	s	User-configurable time pulse delay (TP1)
CFG-TP_TP1_ENA	0x10050007	L	-	-	Enable the first timepulse
if pin associated with time pulse is assigned for another function, the other function takes precedence. Must be set for frequency-time products.					
CFG-TP-SYNC_GNSS_TP1	0x10050008	L	-	-	Sync time pulse to GNSS time or local clock (TP1)
If set, sync to GNSS if GNSS time is valid otherwise, if not set or not available, use local clock. Ignored by time-frequency product variants, which will attempt to use the best available time/frequency reference (not necessarily GNSS). This flag can be unset only in Timing product variants.					
CFG-TP-USE_LOCKED_TP1	0x10050009	L	-	-	Use locked parameters when possible (TP1)
If set, use CFG-TP-PERIOD_LOCK_TP1 and CFG-TP-LEN_LOCK_TP1 as soon as GNSS time is valid. Otherwise if not valid or not set, use CFG-TP-PERIOD_TP1 and CFG-TP-LEN_TP1.					

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-TP-ALIGN_TO_TOW_TP1</i>	0x1005000a	L	-	-	Align time pulse to top of second (TP1) To use this feature, CFG-TP-USE_LOCKED_TP1 must be set. Time pulse period must be an integer fraction of 1 second. Ignored in time-frequency product variants, where it is assumed always enabled.
<i>CFG-TP-POL_TP1</i>	0x1005000b	L	-	-	Set time pulse polarity (TP1) false (0) : falling edge at top of second. true (1) : rising edge at top of second.
<i>CFG-TP-TIMEGRID_TP1</i>	0x2005000c	E1	-	-	Time grid to use (TP1) Only relevant if CFG-TP-USE_LOCKED_TP1 and ALIGN_TO_TOW_TP1 are set. Note that configured GNSS time is estimated by the receiver if locked to any GNSS system. If the receiver has a valid GNSS fix it will attempt to steer the TP to the specified time grid even if the specified time is not based on information from the constellation's satellites. To ensure timing based purely on a given GNSS, restrict the supported constellations in CFG-SIGNAL-*. See Table 47 below for a list of possible constants for this item.
<i>CFG-TP-DRSTR_TP1</i>	0x20050035	E1	-	-	Set drive strength of TP1 Time Pulse pin 1 (TP1) can support 4 possible drive strength cases: 2, 4, 8 and 12 mA See Table 48 below for a list of possible constants for this item.

Table 44: CFG-TP configuration items

Constant	Value	Description
<i>PERIOD</i>	0	Time pulse period [us]
<i>FREQ</i>	1	Time pulse frequency [Hz]

Table 45: Constants for CFG-TP-PULSE_DEF

Constant	Value	Description
<i>RATIO</i>	0	Time pulse ratio
<i>LENGTH</i>	1	Time pulse length

Table 46: Constants for CFG-TP-PULSE_LENGTH_DEF

Constant	Value	Description
<i>UTC</i>	0	UTC time reference
<i>GPS</i>	1	GPS time reference
<i>GLO</i>	2	GLONASS time reference
<i>BDS</i>	3	BeiDou time reference
<i>GAL</i>	4	Galileo time reference
<i>NAVIC</i>	5	NavIC time reference

Table 47: Constants for CFG-TP-TIMEGRID_TP1

Constant	Value	Description
<i>DRIVE_STRENGTH_2MA</i>	0	2 mA drive strength
<i>DRIVE_STRENGTH_4MA</i>	1	4 mA drive strength
<i>DRIVE_STRENGTH_8MA</i>	2	8 mA drive strength
<i>DRIVE_STRENGTH_12MA</i>	3	12 mA drive strength

Table 48: Constants for CFG-TP-DRSTR_TP1

6.9.27 CFG-TXREADY: TX ready configuration

Configuration of the TX ready pin.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-TXREADY-ENABLED</i>	0x10a20001	L	-	-	Flag to indicate if TX ready pin mechanism should be enabled
<i>CFG-TXREADY-POLARITY</i>	0x10a20002	L	-	-	The polarity of the TX ready pin: false:high-active, true:low-active
<i>CFG-TXREADY-PIN</i>	0x20a20003	U1	-	-	Pin number to use for the TX ready functionality
<i>CFG-TXREADY-THRESHOLD</i>	0x30a20004	U2	-	-	Amount of data that should be ready on the interface before triggering the TX ready pin
<i>CFG-TXREADY-INTERFACE</i>	0x20a20005	E1	-	-	Interface where the TX ready feature should be linked to

See [Table 50](#) below for a list of possible constants for this item.

Table 49: CFG-TXREADY configuration items

Constant	Value	Description
<i>I2C</i>	0	I2C interface
<i>SPI</i>	1	SPI interface

Table 50: Constants for CFG-TXREADY-INTERFACE

6.9.28 CFG-UART1: Configuration of the UART1 interface

Settings needed to configure the UART1 communication interface.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-UART1-BAUDRATE</i>	0x40520001	U4	-	-	The baud rate that should be configured on the UART1
<i>CFG-UART1-STOPBITS</i>	0x20520002	E1	-	-	Number of stopbits that should be used on UART1
<i>CFG-UART1-DATABITS</i>	0x20520003	E1	-	-	Number of databits that should be used on UART1
<i>CFG-UART1-PARITY</i>	0x20520004	E1	-	-	Parity mode that should be used on UART1
<i>CFG-UART1-ENABLED</i>	0x10520005	L	-	-	Flag to indicate if the UART1 should be enabled

See [Table 52](#) below for a list of possible constants for this item.

See [Table 53](#) below for a list of possible constants for this item.

See [Table 54](#) below for a list of possible constants for this item.

Table 51: CFG-UART1 configuration items

Constant	Value	Description
<i>HALF</i>	0	0.5 stopbits
<i>ONE</i>	1	1.0 stopbits
<i>ONEHALF</i>	2	1.5 stopbits
<i>TWO</i>	3	2.0 stopbits

Table 52: Constants for CFG-UART1-STOPBITS

Constant	Value	Description
<i>EIGHT</i>	0	8 databits
<i>SEVEN</i>	1	7 databits

Table 53: Constants for CFG-UART1-DATABITS

Constant	Value	Description
<i>NONE</i>	0	No parity bit

Constant	Value	Description
<i>ODD</i>	1	Add an odd parity bit
<i>EVEN</i>	2	Add an even parity bit

Table 54: Constants for CFG-UART1-PARITY

6.9.29 CFG-UART1INPROT: Input protocol configuration of the UART1 interface

Input protocol enable flags of the UART1 interface.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-UART1INPROT-UBX</i>	0x10730001	L	-	-	Flag to indicate if UBX should be an input protocol on UART1
<i>CFG-UART1INPROT-NMEA</i>	0x10730002	L	-	-	Flag to indicate if NMEA should be an input protocol on UART1
<i>CFG-UART1INPROT-RTCM3X</i>	0x10730004	L	-	-	Flag to indicate if RTCM3X should be an input protocol on UART1
<i>CFG-UART1INPROT-SPARTN</i>	0x10730005	L	-	-	Flag to indicate if SPARTN should be an input protocol on UART1

Table 55: CFG-UART1INPROT configuration items

6.9.30 CFG-UART1OUTPROT: Output protocol configuration of the UART1 interface

Output protocol enable flags of the UART1 interface.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-UART1OUTPROT-UBX</i>	0x10740001	L	-	-	Flag to indicate if UBX should be an output protocol on UART1
<i>CFG-UART1OUTPROT-NMEA</i>	0x10740002	L	-	-	Flag to indicate if NMEA should be an output protocol on UART1

Table 56: CFG-UART1OUTPROT configuration items

6.9.31 CFG-UART2: Configuration of the UART2 interface

Settings needed to configure the UART2 communication interface.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-UART2-BAUDRATE</i>	0x40530001	U4	-	-	The baud rate that should be configured on the UART2
<i>CFG-UART2-STOPBITS</i>	0x20530002	E1	-	-	Number of stopbits that should be used on UART2
See Table 58 below for a list of possible constants for this item.					
<i>CFG-UART2-DATABITS</i>	0x20530003	E1	-	-	Number of databits that should be used on UART2
See Table 59 below for a list of possible constants for this item.					
<i>CFG-UART2-PARITY</i>	0x20530004	E1	-	-	Parity mode that should be used on UART2
See Table 60 below for a list of possible constants for this item.					
<i>CFG-UART2-ENABLED</i>	0x10530005	L	-	-	Flag to indicate if the UART2 should be enabled

Table 57: CFG-UART2 configuration items

Constant	Value	Description
<i>HALF</i>	0	0.5 stopbits
<i>ONE</i>	1	1.0 stopbits
<i>ONEHALF</i>	2	1.5 stopbits

Constant	Value	Description
<i>TWO</i>	3	2.0 stopbits

Table 58: Constants for CFG-UART2-STOPBITS

Constant	Value	Description
<i>EIGHT</i>	0	8 databits
<i>SEVEN</i>	1	7 databits

Table 59: Constants for CFG-UART2-DATABITS

Constant	Value	Description
<i>NONE</i>	0	No parity bit
<i>ODD</i>	1	Add an odd parity bit
<i>EVEN</i>	2	Add an even parity bit

Table 60: Constants for CFG-UART2-PARITY

6.9.32 CFG-UART2INPROT: Input protocol configuration of the UART2 interface

Input protocol enable flags of the UART2 interface.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-UART2INPROT-UBX</i>	0x10750001	L	-	-	Flag to indicate if UBX should be an input protocol on UART2
<i>CFG-UART2INPROT-NMEA</i>	0x10750002	L	-	-	Flag to indicate if NMEA should be an input protocol on UART2
<i>CFG-UART2INPROT-RTCM3X</i>	0x10750004	L	-	-	Flag to indicate if RTCM3X should be an input protocol on UART2
<i>CFG-UART2INPROT-SPARTN</i>	0x10750005	L	-	-	Flag to indicate if SPARTN should be an input protocol on UART2

Table 61: CFG-UART2INPROT configuration items

6.9.33 CFG-UART2OUTPROT: Output protocol configuration of the UART2 interface

Output protocol enable flags of the UART2 interface.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-UART2OUTPROT-UBX</i>	0x10760001	L	-	-	Flag to indicate if UBX should be an output protocol on UART2
<i>CFG-UART2OUTPROT-NMEA</i>	0x10760002	L	-	-	Flag to indicate if NMEA should be an output protocol on UART2

Table 62: CFG-UART2OUTPROT configuration items

6.9.34 CFG-USB: Configuration of the USB interface

Settings needed to configure the USB communication interface.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-USB-ENABLED</i>	0x10650001	L	-	-	Flag to indicate if the USB interface should be enabled
<i>CFG-USB-SELFPOW</i>	0x10650002	L	-	-	Self-powered device
<i>CFG-USB-VENDOR_ID</i>	0x3065000a	U2	-	-	Vendor ID
<i>CFG-USB-PRODUCT_ID</i>	0x3065000b	U2	-	-	Vendor ID
<i>CFG-USB-POWER</i>	0x3065000c	U2	-	mA	Power consumption

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-USB-VENDOR_STR0</i>	0x5065000d	X8	-	-	Vendor string characters 0-7
<i>CFG-USB-VENDOR_STR1</i>	0x5065000e	X8	-	-	Vendor string characters 8-15
<i>CFG-USB-VENDOR_STR2</i>	0x5065000f	X8	-	-	Vendor string characters 16-23
<i>CFG-USB-VENDOR_STR3</i>	0x50650010	X8	-	-	Vendor string characters 24-31
<i>CFG-USB-PRODUCT_STR0</i>	0x50650011	X8	-	-	Product string characters 0-7
<i>CFG-USB-PRODUCT_STR1</i>	0x50650012	X8	-	-	Product string characters 8-15
<i>CFG-USB-PRODUCT_STR2</i>	0x50650013	X8	-	-	Product string characters 16-23
<i>CFG-USB-PRODUCT_STR3</i>	0x50650014	X8	-	-	Product string characters 24-31
<i>CFG-USB-SERIAL_NO_STR0</i>	0x50650015	X8	-	-	Serial number string characters 0-7
<i>CFG-USB-SERIAL_NO_STR1</i>	0x50650016	X8	-	-	Serial number string characters 8-15
<i>CFG-USB-SERIAL_NO_STR2</i>	0x50650017	X8	-	-	Serial number string characters 16-23
<i>CFG-USB-SERIAL_NO_STR3</i>	0x50650018	X8	-	-	Serial number string characters 24-31

Table 63: CFG-USB configuration items

6.9.35 CFG-USBINPROT: Input protocol configuration of the USB interface

Input protocol enable flags of the USB interface.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-USBINPROT-UBX</i>	0x10770001	L	-	-	Flag to indicate if UBX should be an input protocol on USB
<i>CFG-USBINPROT-NMEA</i>	0x10770002	L	-	-	Flag to indicate if NMEA should be an input protocol on USB
<i>CFG-USBINPROT-RTCM3X</i>	0x10770004	L	-	-	Flag to indicate if RTCM3X should be an input protocol on USB
<i>CFG-USBINPROT-SPARTN</i>	0x10770005	L	-	-	Flag to indicate if SPARTN should be an input protocol on USB

Table 64: CFG-USBINPROT configuration items

6.9.36 CFG-USBOUTPROT: Output protocol configuration of the USB interface

Output protocol enable flags of the USB interface.

Configuration item	Key ID	Type	Scale	Unit	Description
<i>CFG-USBOUTPROT-UBX</i>	0x10780001	L	-	-	Flag to indicate if UBX should be an output protocol on USB
<i>CFG-USBOUTPROT-NMEA</i>	0x10780002	L	-	-	Flag to indicate if NMEA should be an output protocol on USB

Table 65: CFG-USBOUTPROT configuration items

6.10 Legacy UBX message fields reference

The following table lists the legacy UBX message fields and the corresponding configuration item. Note that the mapping from [UBX-CFG](#) message fields to configuration items is not necessarily 1:1 and that that some legacy UBX-CFG messages may not be available for certain products.

UBX message and field	Configuration item(s)
UBX-CFG-ANT	
UBX-CFG-ANT.ocd	CFG-HW-ANT_CFG_OPENDET
UBX-CFG-ANT.pdwnOnSCD	CFG-HW-ANT_CFG_PWRDOWN
UBX-CFG-ANT.pinOCD	CFG-HW-ANT_SUP_OPEN_PIN

UBX message and field	Configuration item(s)
UBX-CFG-ANT.pinSCD	CFG-HW-ANT_SUP_SHORT_PIN
UBX-CFG-ANT.pinSwitch	CFG-HW-ANT_SUP_SWITCH_PIN
UBX-CFG-ANT.recovery	CFG-HW-ANT_CFG_RECOVER
UBX-CFG-ANT.scd	CFG-HW-ANT_CFG_SHORTDET
UBX-CFG-ANT.svcs	CFG-HW-ANT_CFG_VOLTCTRL
UBX-CFG-DAT	
UBX-CFG-DAT.dX	CFG-NAVSPG-USRDAT_DX
UBX-CFG-DAT.dY	CFG-NAVSPG-USRDAT_DY
UBX-CFG-DAT.dZ	CFG-NAVSPG-USRDAT_DZ
UBX-CFG-DAT.flat	CFG-NAVSPG-USRDAT_FLAT
UBX-CFG-DAT.majA	CFG-NAVSPG-USE_USRDAT, CFG-NAVSPG-USRDAT_MAJA
UBX-CFG-DAT.rotX	CFG-NAVSPG-USRDAT_ROTX
UBX-CFG-DAT.rotY	CFG-NAVSPG-USRDAT_ROTY
UBX-CFG-DAT.rotZ	CFG-NAVSPG-USRDAT_ROTZ
UBX-CFG-DAT.scale	CFG-NAVSPG-USRDAT_SCALE
UBX-CFG-DGNSS	
UBX-CFG-DGNSS.dgnssMode	CFG-NAVHPG-DGNSSMODE
UBX-CFG-ESFA	
UBX-CFG-ESFA.accelRmsThdl	CFG-SFIMU-ACCEL_RMSTHDL
UBX-CFG-ESFA.accuracy	CFG-SFIMU-ACCEL_ACCURACY
UBX-CFG-ESFA.frequency	CFG-SFIMU-ACCEL_FREQUENCY
UBX-CFG-ESFA.latency	CFG-SFIMU-ACCEL_LATENCY
UBX-CFG-ESFALG	
UBX-CFG-ESFALG.doAutoMntAlg	CFG-SFIMU-AUTO_MNTALG_ENA
UBX-CFG-ESFALG.pitch	CFG-SFIMU-IMU_MNTALG_PITCH
UBX-CFG-ESFALG.roll	CFG-SFIMU-IMU_MNTALG_ROLL
UBX-CFG-ESFALG.yaw	CFG-SFIMU-IMU_MNTALG_YAW
UBX-CFG-ESFG	
UBX-CFG-ESFG.accuracy	CFG-SFIMU-GYRO_ACCURACY
UBX-CFG-ESFG.frequency	CFG-SFIMU-GYRO_FREQUENCY
UBX-CFG-ESFG.gyroRmsThdl	CFG-SFIMU-GYRO_RMSTHDL
UBX-CFG-ESFG.latency	CFG-SFIMU-GYRO_LATENCY
UBX-CFG-ESFG.tcTableSaveRate	CFG-SFIMU-GYRO_TC_UPDATE_PERIOD
UBX-CFG-ESFGAWT	
UBX-CFG-ESFGAWT.accelAcc	CFG-SFIMU-ACCEL_ACCURACY
UBX-CFG-ESFGAWT.accelFrequency	CFG-SFIMU-ACCEL_FREQUENCY
UBX-CFG-ESFGAWT.accelLatency	CFG-SFIMU-ACCEL_LATENCY
UBX-CFG-ESFGAWT.accelRmsThdl	CFG-SFIMU-ACCEL_RMSTHDL
UBX-CFG-ESFGAWT.gyroAcc	CFG-SFIMU-GYRO_ACCURACY
UBX-CFG-ESFGAWT.gyroFrequency	CFG-SFIMU-GYRO_FREQUENCY
UBX-CFG-ESFGAWT.gyroLatency	CFG-SFIMU-GYRO_LATENCY
UBX-CFG-ESFGAWT.gyroRmsThdl	CFG-SFIMU-GYRO_RMSTHDL
UBX-CFG-ESFGAWT.tcTableSaveRate	CFG-SFIMU-GYRO_TC_UPDATE_PERIOD
UBX-CFG-ESFGWT	

UBX message and field	Configuration item(s)
UBX-CFG-ESFGWT.gyroAcc	CFG-SFIMU-GYRO_ACCURACY
UBX-CFG-ESFGWT.gyroFrequency	CFG-SFIMU-GYRO_FREQUENCY
UBX-CFG-ESFGWT.gyroLatency	CFG-SFIMU-GYRO_LATENCY
UBX-CFG-ESFGWT.gyroRmsThdl	CFG-SFIMU-GYRO_RMSTHDL
UBX-CFG-ESFGWT.tcTableSaveRate	CFG-SFIMU-GYRO_TC_UPDATE_PERIOD
UBX-CFG-ESFWT	
UBX-CFG-ESFWT.autoDirPinPolOff	CFG-SFODO-DIS_AUTODIRPINPOL
UBX-CFG-ESFWT.autoSoftwareWtOff	CFG-SFODO-DIS_AUTOSW
UBX-CFG-ESFWT.autoUseWtSpeedOff	CFG-SFODO-DIS_AUTOSPEED
UBX-CFG-ESFWT.autoWtCountMaxOff	CFG-SFODO-DIS_AUTOCOUNTMAX
UBX-CFG-ESFWT.cntBothEdges	CFG-SFODO-CNT_BOTH_EDGES
UBX-CFG-ESFWT.combineTicks	CFG-SFODO-COMBINE_TICKS
UBX-CFG-ESFWT.dirPinPol	CFG-SFODO-DIR_PINPOL
UBX-CFG-ESFWT.speedDeadBand	CFG-SFODO-SPEED_BAND
UBX-CFG-ESFWT.useWtPin	CFG-SFODO-USE_WT_PIN
UBX-CFG-ESFWT.useWtSpeed	CFG-SFODO-USE_SPEED
UBX-CFG-ESFWT.wtCountMax	CFG-SFODO-COUNT_MAX
UBX-CFG-ESFWT.wtFactor	CFG-SFODO-FACTOR
UBX-CFG-ESFWT.wtFrequency	CFG-SFODO-FREQUENCY
UBX-CFG-ESFWT.wtLatency	CFG-SFODO-LATENCY
UBX-CFG-ESFWT.wtQuantError	CFG-SFODO-QUANT_ERROR
UBX-CFG-GEOFENCE	
UBX-CFG-GEOFENCE.confLvl	CFG-GEOFENCE-CONFLVL
UBX-CFG-GEOFENCE.lat	CFG-GEOFENCE-FENCE1_LAT, CFG-GEOFENCE-FENCE2_LAT, CFG-GEOFENCE-FENCE3_LAT, CFG-GEOFENCE-FENCE4_LAT
UBX-CFG-GEOFENCE.lon	CFG-GEOFENCE-FENCE1_LON, CFG-GEOFENCE-FENCE2_LON, CFG-GEOFENCE-FENCE3_LON, CFG-GEOFENCE-FENCE4_LON
UBX-CFG-GEOFENCE.numFences	CFG-GEOFENCE-USE_FENCE1, CFG-GEOFENCE-USE_FENCE2, CFG-GEOFENCE-USE_FENCE3, CFG-GEOFENCE-USE_FENCE4
UBX-CFG-GEOFENCE.pin	CFG-GEOFENCE-PIN
UBX-CFG-GEOFENCE.pinPolarity	CFG-GEOFENCE-PINPOL
UBX-CFG-GEOFENCE.pioEnabled	CFG-GEOFENCE-USE_PIO
UBX-CFG-GEOFENCE.radius	CFG-GEOFENCE-FENCE1_RAD, CFG-GEOFENCE-FENCE2_RAD, CFG-GEOFENCE-FENCE3_RAD, CFG-GEOFENCE-FENCE4_RAD
UBX-CFG-GNSS	
UBX-CFG-GNSS.gnssId	CFG-SIGNAL-GPS_ENA, CFG-SIGNAL-SBAS_ENA, CFG-SIGNAL-BDS_ENA, CFG-SIGNAL-QZSS_ENA, CFG-SIGNAL-GLO_ENA
UBX-CFG-INF	
UBX-CFG-INF.infMsgMask	CFG-INFMSG-UBX_I2C, CFG-INFMSG-UBX_UART1, CFG-INFMSG-UBX_UART2, CFG-INFMSG-UBX_USB, CFG-INFMSG-UBX_SPI, CFG-INFMSG-NMEA_I2C, CFG-INFMSG-NMEA_UART1, CFG-INFMSG-NMEA_UART2, CFG-INFMSG-NMEA_USB, CFG-INFMSG-NMEA_SPI

UBX message and field	Configuration item(s)
UBX-CFG-INF.protocolID	CFG-INFMSG-UBX_UART1, CFG-INFMSG-UBX_UART2, CFG-INFMSG-UBX_USB, CFG-INFMSG-UBX_SPI, CFG-INFMSG-NMEA_I2C, CFG-INFMSG-NMEA_UART1, CFG-INFMSG-NMEA_UART2, CFG-INFMSG-NMEA_USB, CFG-INFMSG-NMEA_SPI
UBX-CFG-ITFM	
UBX-CFG-ITFM.antSetting	CFG-ITFM-ANTSETTING
UBX-CFG-ITFM.bbThreshold	CFG-ITFM-BBTHRESHOLD
UBX-CFG-ITFM.cwThreshold	CFG-ITFM-CWTHRESHOLD
UBX-CFG-ITFM.enable	CFG-ITFM-ENABLE
UBX-CFG-ITFM.enable2	CFG-ITFM-ENABLE_AUX
UBX-CFG-MOT	
UBX-CFG-MOT.gnssDistThdl	CFG-MOT-GNSSDIST_THRS
UBX-CFG-MOT.gnssSpeedThdl	CFG-MOT-GNSSSPEED_THRS
UBX-CFG-NAV5	
UBX-CFG-NAV5.cnoThresh	CFG-NAVSPG-INFIL_CNOTHR
UBX-CFG-NAV5.cnoThreshNumSVs	CFG-NAVSPG-INFIL_NCNOTHR
UBX-CFG-NAV5.dgnssTimeout	CFG-NAVSPG-CONSTR_DGNSSTO
UBX-CFG-NAV5.dynModel	CFG-NAVSPG-DYNMODEL
UBX-CFG-NAV5.fixMode	CFG-NAVSPG-FIXMODE
UBX-CFG-NAV5.fixedAlt	CFG-NAVSPG-CONSTR_ALT
UBX-CFG-NAV5.fixedAltVar	CFG-NAVSPG-CONSTR_ALTVAR
UBX-CFG-NAV5.minElev	CFG-NAVSPG-INFIL_MINELEV
UBX-CFG-NAV5.pAcc	CFG-NAVSPG-OUTFIL_PACC
UBX-CFG-NAV5.pDop	CFG-NAVSPG-OUTFIL_PDOP
UBX-CFG-NAV5.staticHoldMaxDist	CFG-MOT-GNSSDIST_THRS
UBX-CFG-NAV5.staticHoldThresh	CFG-MOT-GNSSSPEED_THRS
UBX-CFG-NAV5.tAcc	CFG-NAVSPG-OUTFIL_TACC, CFG-NAVSPG-OUTFIL_FACC
UBX-CFG-NAV5.tDop	CFG-NAVSPG-OUTFIL_TDOP
UBX-CFG-NAV5.utcStandard	CFG-NAVSPG-UTCSTANDARD
UBX-CFG-NAVX5	
UBX-CFG-NAVX5.ackAiding	CFG-NAVSPG-ACKAIDING
UBX-CFG-NAVX5.iniFix3D	CFG-NAVSPG-INIFIX3D
UBX-CFG-NAVX5.maxSVs	CFG-NAVSPG-INFIL_MAXSVS
UBX-CFG-NAVX5.minCNO	CFG-NAVSPG-INFIL_MINCNO
UBX-CFG-NAVX5.minSVs	CFG-NAVSPG-INFIL_MINSVS
UBX-CFG-NAVX5.sigAttenCompMode	CFG-NAVSPG-SIGATTCOMP
UBX-CFG-NAVX5.useAdr	CFG-SFCORE-USE_SF
UBX-CFG-NAVX5.wknRollover	CFG-NAVSPG-WKNROLLOVER
UBX-CFG-NMEA	
UBX-CFG-NMEA.bdsTalkerId	CFG-NMEA-BDSTALKERID
UBX-CFG-NMEA.beidou	CFG-NMEA-FILT_BDS
UBX-CFG-NMEA.compat	CFG-NMEA-COMPAT
UBX-CFG-NMEA.consider	CFG-NMEA-CONSIDER
UBX-CFG-NMEA.dateFilt	CFG-NMEA-OUT_INVDATE

UBX message and field	Configuration item(s)
UBX-CFG-NMEA.galileo	CFG-NMEA-FILT_GAL
UBX-CFG-NMEA.glonass	CFG-NMEA-FILT_GLO
UBX-CFG-NMEA.gps	CFG-NMEA-FILT_GPS
UBX-CFG-NMEA.gpsOnlyFilter	CFG-NMEA-OUT_ONLYGPS
UBX-CFG-NMEA.gsvTalkerId	CFG-NMEA-GSVTALKERID
UBX-CFG-NMEA.highPrec	CFG-NMEA-HIGHPREC
UBX-CFG-NMEA.limit82	CFG-NMEA-LIMIT82
UBX-CFG-NMEA.mainTalkerId	CFG-NMEA-MAINTALKERID
UBX-CFG-NMEA.mskPosFilt	CFG-NMEA-OUT_MSKFIX
UBX-CFG-NMEA.nmeaVersion	CFG-NMEA-PROTVR
UBX-CFG-NMEA.numSV	CFG-NMEA-MAXSVS
UBX-CFG-NMEA.posFilt	CFG-NMEA-OUT_INVFIX
UBX-CFG-NMEA.qzss	CFG-NMEA-FILT_QZSS
UBX-CFG-NMEA.sbas	CFG-NMEA-FILT_SBAS
UBX-CFG-NMEA.svNumbering	CFG-NMEA-SVNUMBERING
UBX-CFG-NMEA.timeFilt	CFG-NMEA-OUT_INVTIME
UBX-CFG-NMEA.trackFilt	CFG-NMEA-OUT_FROZENCOG
UBX-CFG-PRT	
UBX-CFG-PRT.en	CFG-TXREADY-ENABLED
UBX-CFG-PRT.extendedTxTimeout	CFG-I2C-EXTENDEDTIMEOUT
UBX-CFG-PRT.inNmea	CFG-I2CINPROT-NMEA
UBX-CFG-PRT.inProtoMask	CFG-I2C-ENABLED
UBX-CFG-PRT.inRtcm3	CFG-I2CINPROT-RTCM3X
UBX-CFG-PRT.inUbx	CFG-I2CINPROT-UBX
UBX-CFG-PRT.outNmea	CFG-I2COUTPROT-NMEA
UBX-CFG-PRT.outProtoMask	CFG-I2C-ENABLED
UBX-CFG-PRT.outUbx	CFG-I2COUTPROT-UBX
UBX-CFG-PRT.pin	CFG-TXREADY-PIN
UBX-CFG-PRT.pol	CFG-TXREADY-POLARITY
UBX-CFG-PRT.slaveAddr	CFG-I2C-ADDRESS
UBX-CFG-PRT.thres	CFG-TXREADY-THRESHOLD
UBX-CFG-PRT.en	CFG-TXREADY-ENABLED
UBX-CFG-PRT.extendedTxTimeout	CFG-SPI-EXTENDEDTIMEOUT
UBX-CFG-PRT.ffCnt	CFG-SPI-MAXFF
UBX-CFG-PRT.inNmea	CFG-SPIINPROT-NMEA
UBX-CFG-PRT.inProtoMask	CFG-SPI-ENABLED
UBX-CFG-PRT.inRtcm3	CFG-SPIINPROT-RTCM3X
UBX-CFG-PRT.inUbx	CFG-SPIINPROT-UBX
UBX-CFG-PRT.outNmea	CFG-SPIOUTPROT-NMEA
UBX-CFG-PRT.outProtoMask	CFG-SPI-ENABLED
UBX-CFG-PRT.outUbx	CFG-SPIOUTPROT-UBX
UBX-CFG-PRT.pin	CFG-TXREADY-PIN
UBX-CFG-PRT.pol	CFG-TXREADY-POLARITY
UBX-CFG-PRT.spiMode	CFG-SPI-CPOLARITY, CFG-SPI-CPHASE

UBX message and field	Configuration item(s)
UBX-CFG-PRT.thres	CFG-TXREADY-THRESHOLD
UBX-CFG-PRT.baudRate	CFG-UART1-BAUDRATE, CFG-UART2-BAUDRATE
UBX-CFG-PRT.charLen	CFG-UART1-DATABITS, CFG-UART2-DATABITS
UBX-CFG-PRT.inNmea	CFG-UART1INPROT-NMEA, CFG-UART2INPROT-NMEA
UBX-CFG-PRT.inProtoMask	CFG-UART1-ENABLED, CFG-UART2-ENABLED
UBX-CFG-PRT.inRtcm3	CFG-UART1INPROT-RTCM3X, CFG-UART2INPROT-RTCM3X
UBX-CFG-PRT.inUbx	CFG-UART1INPROT-UBX, CFG-UART2INPROT-UBX
UBX-CFG-PRT.nStopBits	CFG-UART1-STOPBITS, CFG-UART2-STOPBITS
UBX-CFG-PRT.outNmea	CFG-UART1OUTPROT-NMEA, CFG-UART2OUTPROT-NMEA
UBX-CFG-PRT.outProtoMask	CFG-UART1-ENABLED, CFG-UART2-ENABLED
UBX-CFG-PRT.outUbx	CFG-UART1OUTPROT-UBX, CFG-UART2OUTPROT-UBX
UBX-CFG-PRT.parity	CFG-UART1-PARITY, CFG-UART2-PARITY
UBX-CFG-PRT.inNmea	CFG-USBINPROT-NMEA
UBX-CFG-PRT.inProtoMask	CFG-USB-ENABLED
UBX-CFG-PRT.inRtcm3	CFG-USBINPROT-RTCM3X
UBX-CFG-PRT.inUbx	CFG-USBINPROT-UBX
UBX-CFG-PRT.outNmea	CFG-USBOUTPROT-NMEA
UBX-CFG-PRT.outProtoMask	CFG-USB-ENABLED
UBX-CFG-PRT.outUbx	CFG-USBOUTPROT-UBX
UBX-CFG-RATE	
UBX-CFG-RATE.measRate	CFG-RATE-MEAS
UBX-CFG-RATE.navRate	CFG-RATE-NAV
UBX-CFG-RATE.timeRef	CFG-RATE-TIMEREFS
UBX-CFG-RINV	
UBX-CFG-RINV.data	CFG-RINV-DATA_SIZE, CFG-RINV-CHUNK0, CFG-RINV-CHUNK1, CFG-RINV-CHUNK2, CFG-RINV-CHUNK3
UBX-CFG-RINV.flags	CFG-RINV-DUMP, CFG-RINV-BINARY
UBX-CFG-SBAS	
UBX-CFG-SBAS.diffCorr	CFG-SBAS-USE_DIFFCORR
UBX-CFG-SBAS.integrity	CFG-SBAS-USE_INTEGRITY
UBX-CFG-SBAS.range	CFG-SBAS-USE_RANGING
UBX-CFG-SBAS.scanmode1	CFG-SBAS-PRNSCANMASK
UBX-CFG-SBAS.test	CFG-SBAS-USE_TESTMODE
UBX-CFG-SENIF	
UBX-CFG-SENIF.i2cSclPio	CFG-SFIMU-IMU_I2C_SCL_PIO
UBX-CFG-SENIF.i2cSdaPio	CFG-SFIMU-IMU_I2C_SDA_PIO
UBX-CFG-TP5	
UBX-CFG-TP5.active	CFG-TP-TP1_ENA
UBX-CFG-TP5.alignToTow	CFG-TP-ALIGN_TO_TOW_TP1
UBX-CFG-TP5.antCableDelay	CFG-TP-ANT_CABLEDELAY
UBX-CFG-TP5.freqPeriod	CFG-TP-PERIOD_TP1, CFG-TP-FREQ_TP1
UBX-CFG-TP5.freqPeriodLock	CFG-TP-PERIOD_LOCK_TP1, CFG-TP-FREQ_LOCK_TP1
UBX-CFG-TP5.gridUtcGnss	CFG-TP-TIMEGRID_TP1
UBX-CFG-TP5.isFreq	CFG-TP-PULSE_DEF

UBX message and field	Configuration item(s)
UBX-CFG-TP5.isLength	CFG-TP-PULSE_LENGTH_DEF
UBX-CFG-TP5.lockGnssFreq	CFG-TP-SYNC_GNSS_TP1
UBX-CFG-TP5.lockedOtherSet	CFG-TP-USE_LOCKED_TP1
UBX-CFG-TP5.polarity	CFG-TP-POL_TP1
UBX-CFG-TP5.pulseLenRatio	CFG-TP-LEN_TP1, CFG-TP-DUTY_TP1
UBX-CFG-TP5.pulseLenRatioLock	CFG-TP-LEN_LOCK_TP1, CFG-TP-DUTY_LOCK_TP1
UBX-CFG-TP5.userConfigDelay	CFG-TP-USER_DELAY_TP1
UBX-CFG-USB	
UBX-CFG-USB.powerConsumption	CFG-USB-POWER
UBX-CFG-USB.powerMode	CFG-USB-SELFPOW
UBX-CFG-USB.productID	CFG-USB-PRODUCT_ID
UBX-CFG-USB.productString	CFG-USB-PRODUCT_STR0, CFG-USB-PRODUCT_STR1, CFG-USB-PRODUCT_STR2, CFG-USB-PRODUCT_STR3
UBX-CFG-USB.serialNumber	CFG-USB-SERIAL_NO_STR0, CFG-USB-SERIAL_NO_STR1, CFG-USB-SERIAL_NO_STR2, CFG-USB-SERIAL_NO_STR3
UBX-CFG-USB.vendorID	CFG-USB-VENDOR_ID
UBX-CFG-USB.vendorString	CFG-USB-VENDOR_STR0, CFG-USB-VENDOR_STR1, CFG-USB-VENDOR_STR2, CFG-USB-VENDOR_STR3

Table 66: Legacy UBX message fields and the corresponding configuration items

Configuration defaults

The following tables contain the configuration defaults for the firmware. Some of these values may be changed in production. Refer to the integration manual for product-specific details.

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-BDS-USE_GEO_PRN	0x10340014	L	-	-	0 (false)

Table 67: CFG-BDS configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-GEOFENCE-CONFLVL	0x20240011	E1	-	-	0 (L000)
CFG-GEOFENCE-USE_PIO	0x10240012	L	-	-	0 (false)
CFG-GEOFENCE-PINPOL	0x20240013	E1	-	-	0 (LOW_IN)
CFG-GEOFENCE-PIN	0x20240014	U1	-	-	12
CFG-GEOFENCE-USE_FENCE1	0x10240020	L	-	-	0 (false)
CFG-GEOFENCE-FENCE1_LAT	0x40240021	I4	1e-7	deg	0
CFG-GEOFENCE-FENCE1_LON	0x40240022	I4	1e-7	deg	0
CFG-GEOFENCE-FENCE1_RAD	0x40240023	U4	0.01	m	0
CFG-GEOFENCE-USE_FENCE2	0x10240030	L	-	-	0 (false)
CFG-GEOFENCE-FENCE2_LAT	0x40240031	I4	1e-7	deg	0
CFG-GEOFENCE-FENCE2_LON	0x40240032	I4	1e-7	deg	0
CFG-GEOFENCE-FENCE2_RAD	0x40240033	U4	0.01	m	0
CFG-GEOFENCE-USE_FENCE3	0x10240040	L	-	-	0 (false)
CFG-GEOFENCE-FENCE3_LAT	0x40240041	I4	1e-7	deg	0
CFG-GEOFENCE-FENCE3_LON	0x40240042	I4	1e-7	deg	0
CFG-GEOFENCE-FENCE3_RAD	0x40240043	U4	0.01	m	0
CFG-GEOFENCE-USE_FENCE4	0x10240050	L	-	-	0 (false)
CFG-GEOFENCE-FENCE4_LAT	0x40240051	I4	1e-7	deg	0
CFG-GEOFENCE-FENCE4_LON	0x40240052	I4	1e-7	deg	0
CFG-GEOFENCE-FENCE4_RAD	0x40240053	U4	0.01	m	0

Table 68: CFG-GEOFENCE configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-HW-ANT_CFG_VOLTCTRL	0x10a3002e	L	-	-	0 (false)
CFG-HW-ANT_CFG_SHORTDET	0x10a3002f	L	-	-	0 (false)
CFG-HW-ANT_CFG_SHORTDET_POL	0x10a30030	L	-	-	1 (true)
CFG-HW-ANT_CFG_OPENDET	0x10a30031	L	-	-	0 (false)
CFG-HW-ANT_CFG_OPENDET_POL	0x10a30032	L	-	-	1 (true)
CFG-HW-ANT_CFG_PWRDOWN	0x10a30033	L	-	-	0 (false)
CFG-HW-ANT_CFG_PWRDOWN_POL	0x10a30034	L	-	-	1 (true)
CFG-HW-ANT_CFG_RECOVER	0x10a30035	L	-	-	0 (false)
CFG-HW-ANT_SUP_SWITCH_PIN	0x20a30036	U1	-	-	16
CFG-HW-ANT_SUP_SHORT_PIN	0x20a30037	U1	-	-	15
CFG-HW-ANT_SUP_OPEN_PIN	0x20a30038	U1	-	-	8

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-HW-ANT_SUP_ENGINE	0x20a30054	E1	-	-	0 (EXT)
CFG-HW-ANT_SUP_SHORT_THR	0x20a30055	U1	-	mV	0
CFG-HW-ANT_SUP_OPEN_THR	0x20a30056	U1	-	mV	0

Table 69: CFG-HW configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-I2C-ADDRESS	0x20510001	U1	-	-	132
CFG-I2C-EXTENDEDTIMEOUT	0x10510002	L	-	-	0 (false)
CFG-I2C-ENABLED	0x10510003	L	-	-	1 (true)

Table 70: CFG-I2C configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-I2CINPROT-UBX	0x10710001	L	-	-	1 (true)
CFG-I2CINPROT-NMEA	0x10710002	L	-	-	1 (true)
CFG-I2CINPROT-RTCM3X	0x10710004	L	-	-	1 (true)
CFG-I2CINPROT-SPARTN	0x10710005	L	-	-	1 (true)

Table 71: CFG-I2CINPROT configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-I2COUTPROT-UBX	0x10720001	L	-	-	1 (true)
CFG-I2COUTPROT-NMEA	0x10720002	L	-	-	1 (true)

Table 72: CFG-I2COUTPROT configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-INFMSG-UBX_I2C	0x20920001	X1	-	-	0x00
CFG-INFMSG-UBX_UART1	0x20920002	X1	-	-	0x00
CFG-INFMSG-UBX_UART2	0x20920003	X1	-	-	0x00
CFG-INFMSG-UBX_USB	0x20920004	X1	-	-	0x00
CFG-INFMSG-UBX_SPI	0x20920005	X1	-	-	0x00
CFG-INFMSG-NMEA_I2C	0x20920006	X1	-	-	0x07 (ERROR WARNING NOTICE)
CFG-INFMSG-NMEA_UART1	0x20920007	X1	-	-	0x07 (ERROR WARNING NOTICE)
CFG-INFMSG-NMEA_UART2	0x20920008	X1	-	-	0x07 (ERROR WARNING NOTICE)
CFG-INFMSG-NMEA_USB	0x20920009	X1	-	-	0x07 (ERROR WARNING NOTICE)
CFG-INFMSG-NMEA_SPI	0x2092000a	X1	-	-	0x07 (ERROR WARNING NOTICE)

Table 73: CFG-INFMSG configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-ITFM-BBTHRESHOLD	0x20410001	U1	-	-	3
CFG-ITFM-CWTHRESHOLD	0x20410002	U1	-	-	15
CFG-ITFM-ENABLE	0x1041000d	L	-	-	0 (false)
CFG-ITFM-ANTSETTING	0x20410010	E1	-	-	0 (UNKNOWN)

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-ITFM-ENABLE_AUX	0x10410013	L	-	-	0 (false)

Table 74: CFG-ITFM configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-MOT-GNSSSPEED_THRS	0x20250038	U1	0.01	m/s	0
CFG-MOT-GNSSDIST_THRS	0x3025003b	U2	-	-	0

Table 75: CFG-MOT configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-MSGOUT-NMEA_ID_DTM_I2C	0x209100a6	U1	-	-	0
CFG-MSGOUT-NMEA_ID_DTM_SPI	0x209100aa	U1	-	-	0
CFG-MSGOUT-NMEA_ID_DTM_UART1	0x209100a7	U1	-	-	0
CFG-MSGOUT-NMEA_ID_DTM_UART2	0x209100a8	U1	-	-	0
CFG-MSGOUT-NMEA_ID_DTM_USB	0x209100a9	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GBS_I2C	0x209100dd	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GBS_SPI	0x209100e1	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GBS_UART1	0x209100de	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GBS_UART2	0x209100df	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GBS_USB	0x209100e0	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GGA_I2C	0x209100ba	U1	-	-	1
CFG-MSGOUT-NMEA_ID_GGA_SPI	0x209100be	U1	-	-	1
CFG-MSGOUT-NMEA_ID_GGA_UART1	0x209100bb	U1	-	-	1
CFG-MSGOUT-NMEA_ID_GGA_UART2	0x209100bc	U1	-	-	1
CFG-MSGOUT-NMEA_ID_GGA_USB	0x209100bd	U1	-	-	1
CFG-MSGOUT-NMEA_ID_GLL_I2C	0x209100c9	U1	-	-	1
CFG-MSGOUT-NMEA_ID_GLL_SPI	0x209100cd	U1	-	-	1
CFG-MSGOUT-NMEA_ID_GLL_UART1	0x209100ca	U1	-	-	1
CFG-MSGOUT-NMEA_ID_GLL_UART2	0x209100cb	U1	-	-	1
CFG-MSGOUT-NMEA_ID_GLL_USB	0x209100cc	U1	-	-	1
CFG-MSGOUT-NMEA_ID_GNS_I2C	0x209100b5	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GNS_SPI	0x209100b9	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GNS_UART1	0x209100b6	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GNS_UART2	0x209100b7	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GNS_USB	0x209100b8	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GRS_I2C	0x209100ce	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GRS_SPI	0x209100d2	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GRS_UART1	0x209100cf	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GRS_UART2	0x209100d0	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GRS_USB	0x209100d1	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GSA_I2C	0x209100bf	U1	-	-	1
CFG-MSGOUT-NMEA_ID_GSA_SPI	0x209100c3	U1	-	-	1
CFG-MSGOUT-NMEA_ID_GSA_UART1	0x209100c0	U1	-	-	1

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-MSGOUT-NMEA_ID_GSA_UART2	0x209100c1	U1	-	-	1
CFG-MSGOUT-NMEA_ID_GSA_USB	0x209100c2	U1	-	-	1
CFG-MSGOUT-NMEA_ID_GST_I2C	0x209100d3	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GST_SPI	0x209100d7	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GST_UART1	0x209100d4	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GST_UART2	0x209100d5	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GST_USB	0x209100d6	U1	-	-	0
CFG-MSGOUT-NMEA_ID_GSV_I2C	0x209100c4	U1	-	-	1
CFG-MSGOUT-NMEA_ID_GSV_SPI	0x209100c8	U1	-	-	1
CFG-MSGOUT-NMEA_ID_GSV_UART1	0x209100c5	U1	-	-	1
CFG-MSGOUT-NMEA_ID_GSV_UART2	0x209100c6	U1	-	-	1
CFG-MSGOUT-NMEA_ID_GSV_USB	0x209100c7	U1	-	-	1
CFG-MSGOUT-NMEA_ID_RLM_I2C	0x20910400	U1	-	-	0
CFG-MSGOUT-NMEA_ID_RLM_SPI	0x20910404	U1	-	-	0
CFG-MSGOUT-NMEA_ID_RLM_UART1	0x20910401	U1	-	-	0
CFG-MSGOUT-NMEA_ID_RLM_UART2	0x20910402	U1	-	-	0
CFG-MSGOUT-NMEA_ID_RLM_USB	0x20910403	U1	-	-	0
CFG-MSGOUT-NMEA_ID_RMC_I2C	0x209100ab	U1	-	-	1
CFG-MSGOUT-NMEA_ID_RMC_SPI	0x209100af	U1	-	-	1
CFG-MSGOUT-NMEA_ID_RMC_UART1	0x209100ac	U1	-	-	1
CFG-MSGOUT-NMEA_ID_RMC_UART2	0x209100ad	U1	-	-	1
CFG-MSGOUT-NMEA_ID_RMC_USB	0x209100ae	U1	-	-	1
CFG-MSGOUT-NMEA_ID_THS_I2C	0x209100e2	U1	-	-	0
CFG-MSGOUT-NMEA_ID_THS_SPI	0x209100e6	U1	-	-	0
CFG-MSGOUT-NMEA_ID_THS_UART1	0x209100e3	U1	-	-	0
CFG-MSGOUT-NMEA_ID_THS_UART2	0x209100e4	U1	-	-	0
CFG-MSGOUT-NMEA_ID_THS_USB	0x209100e5	U1	-	-	0
CFG-MSGOUT-NMEA_ID_VTG_I2C	0x209100b0	U1	-	-	1
CFG-MSGOUT-NMEA_ID_VTG_SPI	0x209100b4	U1	-	-	1
CFG-MSGOUT-NMEA_ID_VTG_UART1	0x209100b1	U1	-	-	1
CFG-MSGOUT-NMEA_ID_VTG_UART2	0x209100b2	U1	-	-	1
CFG-MSGOUT-NMEA_ID_VTG_USB	0x209100b3	U1	-	-	1
CFG-MSGOUT-NMEA_ID_ZDA_I2C	0x209100d8	U1	-	-	0
CFG-MSGOUT-NMEA_ID_ZDA_SPI	0x209100dc	U1	-	-	0
CFG-MSGOUT-NMEA_ID_ZDA_UART1	0x209100d9	U1	-	-	0
CFG-MSGOUT-NMEA_ID_ZDA_UART2	0x209100da	U1	-	-	0
CFG-MSGOUT-NMEA_ID_ZDA_USB	0x209100db	U1	-	-	0
CFG-MSGOUT-PUBX_ID_POLYP_I2C	0x209100ec	U1	-	-	0
CFG-MSGOUT-PUBX_ID_POLYP_SPI	0x209100f0	U1	-	-	0
CFG-MSGOUT-PUBX_ID_POLYP_UART1	0x209100ed	U1	-	-	0
CFG-MSGOUT-PUBX_ID_POLYP_UART2	0x209100ee	U1	-	-	0

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-MSGOUT-PUBX_ID_POLYP_USB	0x209100ef	U1	-	-	0
CFG-MSGOUT-PUBX_ID_POLYS_I2C	0x209100f1	U1	-	-	0
CFG-MSGOUT-PUBX_ID_POLYS_SPI	0x209100f5	U1	-	-	0
CFG-MSGOUT-PUBX_ID_POLYS_UART1	0x209100f2	U1	-	-	0
CFG-MSGOUT-PUBX_ID_POLYS_UART2	0x209100f3	U1	-	-	0
CFG-MSGOUT-PUBX_ID_POLYS_USB	0x209100f4	U1	-	-	0
CFG-MSGOUT-PUBX_ID_POLYT_I2C	0x209100f6	U1	-	-	0
CFG-MSGOUT-PUBX_ID_POLYT_SPI	0x209100fa	U1	-	-	0
CFG-MSGOUT-PUBX_ID_POLYT_UART1	0x209100f7	U1	-	-	0
CFG-MSGOUT-PUBX_ID_POLYT_UART2	0x209100f8	U1	-	-	0
CFG-MSGOUT-PUBX_ID_POLYT_USB	0x209100f9	U1	-	-	0
CFG-MSGOUT-UBX_ESF_ALG_I2C	0x2091010f	U1	-	-	0
CFG-MSGOUT-UBX_ESF_ALG_SPI	0x20910113	U1	-	-	0
CFG-MSGOUT-UBX_ESF_ALG_UART1	0x20910110	U1	-	-	0
CFG-MSGOUT-UBX_ESF_ALG_UART2	0x20910111	U1	-	-	0
CFG-MSGOUT-UBX_ESF_ALG_USB	0x20910112	U1	-	-	0
CFG-MSGOUT-UBX_ESF_INS_I2C	0x20910114	U1	-	-	0
CFG-MSGOUT-UBX_ESF_INS_SPI	0x20910118	U1	-	-	0
CFG-MSGOUT-UBX_ESF_INS_UART1	0x20910115	U1	-	-	0
CFG-MSGOUT-UBX_ESF_INS_UART2	0x20910116	U1	-	-	0
CFG-MSGOUT-UBX_ESF_INS_USB	0x20910117	U1	-	-	0
CFG-MSGOUT-UBX_ESF_MEAS_I2C	0x20910277	U1	-	-	0
CFG-MSGOUT-UBX_ESF_MEAS_SPI	0x2091027b	U1	-	-	0
CFG-MSGOUT-UBX_ESF_MEAS_UART1	0x20910278	U1	-	-	0
CFG-MSGOUT-UBX_ESF_MEAS_UART2	0x20910279	U1	-	-	0
CFG-MSGOUT-UBX_ESF_MEAS_USB	0x2091027a	U1	-	-	0
CFG-MSGOUT-UBX_ESF_RAW_I2C	0x2091029f	U1	-	-	0
CFG-MSGOUT-UBX_ESF_RAW_SPI	0x209102a3	U1	-	-	0
CFG-MSGOUT-UBX_ESF_RAW_UART1	0x209102a0	U1	-	-	0
CFG-MSGOUT-UBX_ESF_RAW_UART2	0x209102a1	U1	-	-	0
CFG-MSGOUT-UBX_ESF_RAW_USB	0x209102a2	U1	-	-	0
CFG-MSGOUT-UBX_ESF_STATUS_I2C	0x20910105	U1	-	-	0
CFG-MSGOUT-UBX_ESF_STATUS_SPI	0x20910109	U1	-	-	0
CFG-MSGOUT-UBX_ESF_STATUS_UART1	0x20910106	U1	-	-	0
CFG-MSGOUT-UBX_ESF_STATUS_UART2	0x20910107	U1	-	-	0
CFG-MSGOUT-UBX_ESF_STATUS_USB	0x20910108	U1	-	-	0
CFG-MSGOUT-UBX_MON_COMMS_I2C	0x2091034f	U1	-	-	0
CFG-MSGOUT-UBX_MON_COMMS_SPI	0x20910353	U1	-	-	0
CFG-MSGOUT-UBX_MON_COMMS_UART1	0x20910350	U1	-	-	0
CFG-MSGOUT-UBX_MON_COMMS_UART2	0x20910351	U1	-	-	0
CFG-MSGOUT-UBX_MON_COMMS_USB	0x20910352	U1	-	-	0

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-MSGOUT-UBX_MON_HW2_I2C	0x209101b9	U1	-	-	0
CFG-MSGOUT-UBX_MON_HW2_SPI	0x209101bd	U1	-	-	0
CFG-MSGOUT-UBX_MON_HW2_UART1	0x209101ba	U1	-	-	0
CFG-MSGOUT-UBX_MON_HW2_UART2	0x209101bb	U1	-	-	0
CFG-MSGOUT-UBX_MON_HW2_USB	0x209101bc	U1	-	-	0
CFG-MSGOUT-UBX_MON_HW3_I2C	0x20910354	U1	-	-	0
CFG-MSGOUT-UBX_MON_HW3_SPI	0x20910358	U1	-	-	0
CFG-MSGOUT-UBX_MON_HW3_UART1	0x20910355	U1	-	-	0
CFG-MSGOUT-UBX_MON_HW3_UART2	0x20910356	U1	-	-	0
CFG-MSGOUT-UBX_MON_HW3_USB	0x20910357	U1	-	-	0
CFG-MSGOUT-UBX_MON_HW_I2C	0x209101b4	U1	-	-	0
CFG-MSGOUT-UBX_MON_HW_SPI	0x209101b8	U1	-	-	0
CFG-MSGOUT-UBX_MON_HW_UART1	0x209101b5	U1	-	-	0
CFG-MSGOUT-UBX_MON_HW_UART2	0x209101b6	U1	-	-	0
CFG-MSGOUT-UBX_MON_HW_USB	0x209101b7	U1	-	-	0
CFG-MSGOUT-UBX_MON_IO_I2C	0x209101a5	U1	-	-	0
CFG-MSGOUT-UBX_MON_IO_SPI	0x209101a9	U1	-	-	0
CFG-MSGOUT-UBX_MON_IO_UART1	0x209101a6	U1	-	-	0
CFG-MSGOUT-UBX_MON_IO_UART2	0x209101a7	U1	-	-	0
CFG-MSGOUT-UBX_MON_IO_USB	0x209101a8	U1	-	-	0
CFG-MSGOUT-UBX_MON_MSGPP_I2C	0x20910196	U1	-	-	0
CFG-MSGOUT-UBX_MON_MSGPP_SPI	0x2091019a	U1	-	-	0
CFG-MSGOUT-UBX_MON_MSGPP_UART1	0x20910197	U1	-	-	0
CFG-MSGOUT-UBX_MON_MSGPP_UART2	0x20910198	U1	-	-	0
CFG-MSGOUT-UBX_MON_MSGPP_USB	0x20910199	U1	-	-	0
CFG-MSGOUT-UBX_MON_RF_I2C	0x20910359	U1	-	-	0
CFG-MSGOUT-UBX_MON_RF_SPI	0x2091035d	U1	-	-	0
CFG-MSGOUT-UBX_MON_RF_UART1	0x2091035a	U1	-	-	0
CFG-MSGOUT-UBX_MON_RF_UART2	0x2091035b	U1	-	-	0
CFG-MSGOUT-UBX_MON_RF_USB	0x2091035c	U1	-	-	0
CFG-MSGOUT-UBX_MON_RXBUF_I2C	0x209101a0	U1	-	-	0
CFG-MSGOUT-UBX_MON_RXBUF_SPI	0x209101a4	U1	-	-	0
CFG-MSGOUT-UBX_MON_RXBUF_UART1	0x209101a1	U1	-	-	0
CFG-MSGOUT-UBX_MON_RXBUF_UART2	0x209101a2	U1	-	-	0
CFG-MSGOUT-UBX_MON_RXBUF_USB	0x209101a3	U1	-	-	0
CFG-MSGOUT-UBX_MON_RXR_I2C	0x20910187	U1	-	-	0
CFG-MSGOUT-UBX_MON_RXR_SPI	0x2091018b	U1	-	-	0
CFG-MSGOUT-UBX_MON_RXR_UART1	0x20910188	U1	-	-	0
CFG-MSGOUT-UBX_MON_RXR_UART2	0x20910189	U1	-	-	0
CFG-MSGOUT-UBX_MON_RXR_USB	0x2091018a	U1	-	-	0
CFG-MSGOUT-UBX_MON_SPAN_I2C	0x2091038b	U1	-	-	0

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-MSGOUT-UBX_MON_SPAN_SPI	0x2091038f	U1	-	-	0
CFG-MSGOUT-UBX_MON_SPAN_UART1	0x2091038c	U1	-	-	0
CFG-MSGOUT-UBX_MON_SPAN_UART2	0x2091038d	U1	-	-	0
CFG-MSGOUT-UBX_MON_SPAN_USB	0x2091038e	U1	-	-	0
CFG-MSGOUT-UBX_MON_TXBUF_I2C	0x2091019b	U1	-	-	0
CFG-MSGOUT-UBX_MON_TXBUF_SPI	0x2091019f	U1	-	-	0
CFG-MSGOUT-UBX_MON_TXBUF_UART1	0x2091019c	U1	-	-	0
CFG-MSGOUT-UBX_MON_TXBUF_UART2	0x2091019d	U1	-	-	0
CFG-MSGOUT-UBX_MON_TXBUF_USB	0x2091019e	U1	-	-	0
CFG-MSGOUT-UBX_NAV_ATT_I2C	0x2091001f	U1	-	-	0
CFG-MSGOUT-UBX_NAV_ATT_SPI	0x20910023	U1	-	-	0
CFG-MSGOUT-UBX_NAV_ATT_UART1	0x20910020	U1	-	-	0
CFG-MSGOUT-UBX_NAV_ATT_UART2	0x20910021	U1	-	-	0
CFG-MSGOUT-UBX_NAV_ATT_USB	0x20910022	U1	-	-	0
CFG-MSGOUT-UBX_NAV_CLOCK_I2C	0x20910065	U1	-	-	0
CFG-MSGOUT-UBX_NAV_CLOCK_SPI	0x20910069	U1	-	-	0
CFG-MSGOUT-UBX_NAV_CLOCK_UART1	0x20910066	U1	-	-	0
CFG-MSGOUT-UBX_NAV_CLOCK_UART2	0x20910067	U1	-	-	0
CFG-MSGOUT-UBX_NAV_CLOCK_USB	0x20910068	U1	-	-	0
CFG-MSGOUT-UBX_NAV_COV_I2C	0x20910083	U1	-	-	0
CFG-MSGOUT-UBX_NAV_COV_SPI	0x20910087	U1	-	-	0
CFG-MSGOUT-UBX_NAV_COV_UART1	0x20910084	U1	-	-	0
CFG-MSGOUT-UBX_NAV_COV_UART2	0x20910085	U1	-	-	0
CFG-MSGOUT-UBX_NAV_COV_USB	0x20910086	U1	-	-	0
CFG-MSGOUT-UBX_NAV_DOP_I2C	0x20910038	U1	-	-	0
CFG-MSGOUT-UBX_NAV_DOP_SPI	0x2091003c	U1	-	-	0
CFG-MSGOUT-UBX_NAV_DOP_UART1	0x20910039	U1	-	-	0
CFG-MSGOUT-UBX_NAV_DOP_UART2	0x2091003a	U1	-	-	0
CFG-MSGOUT-UBX_NAV_DOP_USB	0x2091003b	U1	-	-	0
CFG-MSGOUT-UBX_NAV_EELL_I2C	0x20910313	U1	-	-	0
CFG-MSGOUT-UBX_NAV_EELL_SPI	0x20910317	U1	-	-	0
CFG-MSGOUT-UBX_NAV_EELL_UART1	0x20910314	U1	-	-	0
CFG-MSGOUT-UBX_NAV_EELL_UART2	0x20910315	U1	-	-	0
CFG-MSGOUT-UBX_NAV_EELL_USB	0x20910316	U1	-	-	0
CFG-MSGOUT-UBX_NAV_EOE_I2C	0x2091015f	U1	-	-	0
CFG-MSGOUT-UBX_NAV_EOE_SPI	0x20910163	U1	-	-	0
CFG-MSGOUT-UBX_NAV_EOE_UART1	0x20910160	U1	-	-	0
CFG-MSGOUT-UBX_NAV_EOE_UART2	0x20910161	U1	-	-	0
CFG-MSGOUT-UBX_NAV_EOE_USB	0x20910162	U1	-	-	0
CFG-MSGOUT-UBX_NAV_GEOFENCE_I2C	0x209100a1	U1	-	-	0
CFG-MSGOUT-UBX_NAV_GEOFENCE_SPI	0x209100a5	U1	-	-	0

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-MSGOUT-UBX_NAV_GEOFENCE_UART1	0x209100a2	U1	-	-	0
CFG-MSGOUT-UBX_NAV_GEOFENCE_UART2	0x209100a3	U1	-	-	0
CFG-MSGOUT-UBX_NAV_GEOFENCE_USB	0x209100a4	U1	-	-	0
CFG-MSGOUT-UBX_NAV_HPPOSECEF_I2C	0x2091002e	U1	-	-	0
CFG-MSGOUT-UBX_NAV_HPPOSECEF_SPI	0x20910032	U1	-	-	0
CFG-MSGOUT-UBX_NAV_HPPOSECEF_UART1	0x2091002f	U1	-	-	0
CFG-MSGOUT-UBX_NAV_HPPOSECEF_UART2	0x20910030	U1	-	-	0
CFG-MSGOUT-UBX_NAV_HPPOSECEF_USB	0x20910031	U1	-	-	0
CFG-MSGOUT-UBX_NAV_HPPOSLLH_I2C	0x20910033	U1	-	-	0
CFG-MSGOUT-UBX_NAV_HPPOSLLH_SPI	0x20910037	U1	-	-	0
CFG-MSGOUT-UBX_NAV_HPPOSLLH_UART1	0x20910034	U1	-	-	0
CFG-MSGOUT-UBX_NAV_HPPOSLLH_UART2	0x20910035	U1	-	-	0
CFG-MSGOUT-UBX_NAV_HPPOSLLH_USB	0x20910036	U1	-	-	0
CFG-MSGOUT-UBX_NAV_ORB_I2C	0x20910010	U1	-	-	0
CFG-MSGOUT-UBX_NAV_ORB_SPI	0x20910014	U1	-	-	0
CFG-MSGOUT-UBX_NAV_ORB_UART1	0x20910011	U1	-	-	0
CFG-MSGOUT-UBX_NAV_ORB_UART2	0x20910012	U1	-	-	0
CFG-MSGOUT-UBX_NAV_ORB_USB	0x20910013	U1	-	-	0
CFG-MSGOUT-UBX_NAV_POSECEF_I2C	0x20910024	U1	-	-	0
CFG-MSGOUT-UBX_NAV_POSECEF_SPI	0x20910028	U1	-	-	0
CFG-MSGOUT-UBX_NAV_POSECEF_UART1	0x20910025	U1	-	-	0
CFG-MSGOUT-UBX_NAV_POSECEF_UART2	0x20910026	U1	-	-	0
CFG-MSGOUT-UBX_NAV_POSECEF_USB	0x20910027	U1	-	-	0
CFG-MSGOUT-UBX_NAV_POSLLH_I2C	0x20910029	U1	-	-	0
CFG-MSGOUT-UBX_NAV_POSLLH_SPI	0x2091002d	U1	-	-	0
CFG-MSGOUT-UBX_NAV_POSLLH_UART1	0x2091002a	U1	-	-	0
CFG-MSGOUT-UBX_NAV_POSLLH_UART2	0x2091002b	U1	-	-	0
CFG-MSGOUT-UBX_NAV_POSLLH_USB	0x2091002c	U1	-	-	0
CFG-MSGOUT-UBX_NAV_PVAT_I2C	0x2091062a	U1	-	-	0
CFG-MSGOUT-UBX_NAV_PVAT_SPI	0x2091062e	U1	-	-	0
CFG-MSGOUT-UBX_NAV_PVAT_UART1	0x2091062b	U1	-	-	0
CFG-MSGOUT-UBX_NAV_PVAT_UART2	0x2091062c	U1	-	-	0
CFG-MSGOUT-UBX_NAV_PVAT_USB	0x2091062d	U1	-	-	0
CFG-MSGOUT-UBX_NAV_PVT_I2C	0x20910006	U1	-	-	0
CFG-MSGOUT-UBX_NAV_PVT_SPI	0x2091000a	U1	-	-	0
CFG-MSGOUT-UBX_NAV_PVT_UART1	0x20910007	U1	-	-	0
CFG-MSGOUT-UBX_NAV_PVT_UART2	0x20910008	U1	-	-	0
CFG-MSGOUT-UBX_NAV_PVT_USB	0x20910009	U1	-	-	0
CFG-MSGOUT-UBX_NAV_RELPOSND_I2C	0x2091008d	U1	-	-	0
CFG-MSGOUT-UBX_NAV_RELPOSND_SPI	0x20910091	U1	-	-	0
CFG-MSGOUT-UBX_NAV_RELPOSND_UART1	0x2091008e	U1	-	-	0

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-MSGOUT-UBX_NAV_RELPOS_NED_UART2	0x2091008f	U1	-	-	0
CFG-MSGOUT-UBX_NAV_RELPOS_NED_USB	0x20910090	U1	-	-	0
CFG-MSGOUT-UBX_NAV_SAT_I2C	0x20910015	U1	-	-	0
CFG-MSGOUT-UBX_NAV_SAT_SPI	0x20910019	U1	-	-	0
CFG-MSGOUT-UBX_NAV_SAT_UART1	0x20910016	U1	-	-	0
CFG-MSGOUT-UBX_NAV_SAT_UART2	0x20910017	U1	-	-	0
CFG-MSGOUT-UBX_NAV_SAT_USB	0x20910018	U1	-	-	0
CFG-MSGOUT-UBX_NAV_SBAS_I2C	0x2091006a	U1	-	-	0
CFG-MSGOUT-UBX_NAV_SBAS_SPI	0x2091006e	U1	-	-	0
CFG-MSGOUT-UBX_NAV_SBAS_UART1	0x2091006b	U1	-	-	0
CFG-MSGOUT-UBX_NAV_SBAS_UART2	0x2091006c	U1	-	-	0
CFG-MSGOUT-UBX_NAV_SBAS_USB	0x2091006d	U1	-	-	0
CFG-MSGOUT-UBX_NAV_SIG_I2C	0x20910345	U1	-	-	0
CFG-MSGOUT-UBX_NAV_SIG_SPI	0x20910349	U1	-	-	0
CFG-MSGOUT-UBX_NAV_SIG_UART1	0x20910346	U1	-	-	0
CFG-MSGOUT-UBX_NAV_SIG_UART2	0x20910347	U1	-	-	0
CFG-MSGOUT-UBX_NAV_SIG_USB	0x20910348	U1	-	-	0
CFG-MSGOUT-UBX_NAV_STATUS_I2C	0x2091001a	U1	-	-	0
CFG-MSGOUT-UBX_NAV_STATUS_SPI	0x2091001e	U1	-	-	0
CFG-MSGOUT-UBX_NAV_STATUS_UART1	0x2091001b	U1	-	-	0
CFG-MSGOUT-UBX_NAV_STATUS_UART2	0x2091001c	U1	-	-	0
CFG-MSGOUT-UBX_NAV_STATUS_USB	0x2091001d	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEBDS_I2C	0x20910051	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEBDS_SPI	0x20910055	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEBDS_UART1	0x20910052	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEBDS_UART2	0x20910053	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEBDS_USB	0x20910054	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEGAL_I2C	0x20910056	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEGAL_SPI	0x2091005a	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEGAL_UART1	0x20910057	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEGAL_UART2	0x20910058	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEGAL_USB	0x20910059	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEGLO_I2C	0x2091004c	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEGLO_SPI	0x20910050	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEGLO_UART1	0x2091004d	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEGLO_UART2	0x2091004e	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEGLO_USB	0x2091004f	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEGPS_I2C	0x20910047	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEGPS_SPI	0x2091004b	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEGPS_UART1	0x20910048	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEGPS_UART2	0x20910049	U1	-	-	0

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-MSGOUT-UBX_NAV_TIMEGPS_USB	0x2091004a	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMELS_I2C	0x20910060	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMELS_SPI	0x20910064	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMELS_UART1	0x20910061	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMELS_UART2	0x20910062	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMELS_USB	0x20910063	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEUTC_I2C	0x2091005b	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEUTC_SPI	0x2091005f	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEUTC_UART1	0x2091005c	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEUTC_UART2	0x2091005d	U1	-	-	0
CFG-MSGOUT-UBX_NAV_TIMEUTC_USB	0x2091005e	U1	-	-	0
CFG-MSGOUT-UBX_NAV_VELECEF_I2C	0x2091003d	U1	-	-	0
CFG-MSGOUT-UBX_NAV_VELECEF_SPI	0x20910041	U1	-	-	0
CFG-MSGOUT-UBX_NAV_VELECEF_UART1	0x2091003e	U1	-	-	0
CFG-MSGOUT-UBX_NAV_VELECEF_UART2	0x2091003f	U1	-	-	0
CFG-MSGOUT-UBX_NAV_VELECEF_USB	0x20910040	U1	-	-	0
CFG-MSGOUT-UBX_NAV_VELNED_I2C	0x20910042	U1	-	-	0
CFG-MSGOUT-UBX_NAV_VELNED_SPI	0x20910046	U1	-	-	0
CFG-MSGOUT-UBX_NAV_VELNED_UART1	0x20910043	U1	-	-	0
CFG-MSGOUT-UBX_NAV_VELNED_UART2	0x20910044	U1	-	-	0
CFG-MSGOUT-UBX_NAV_VELNED_USB	0x20910045	U1	-	-	0
CFG-MSGOUT-UBX_RXM_MEASX_I2C	0x20910204	U1	-	-	0
CFG-MSGOUT-UBX_RXM_MEASX_SPI	0x20910208	U1	-	-	0
CFG-MSGOUT-UBX_RXM_MEASX_UART1	0x20910205	U1	-	-	0
CFG-MSGOUT-UBX_RXM_MEASX_UART2	0x20910206	U1	-	-	0
CFG-MSGOUT-UBX_RXM_MEASX_USB	0x20910207	U1	-	-	0
CFG-MSGOUT-UBX_RXM_RAWX_I2C	0x209102a4	U1	-	-	0
CFG-MSGOUT-UBX_RXM_RAWX_SPI	0x209102a8	U1	-	-	0
CFG-MSGOUT-UBX_RXM_RAWX_UART1	0x209102a5	U1	-	-	0
CFG-MSGOUT-UBX_RXM_RAWX_UART2	0x209102a6	U1	-	-	0
CFG-MSGOUT-UBX_RXM_RAWX_USB	0x209102a7	U1	-	-	0
CFG-MSGOUT-UBX_RXM_RLM_I2C	0x2091025e	U1	-	-	0
CFG-MSGOUT-UBX_RXM_RLM_SPI	0x20910262	U1	-	-	0
CFG-MSGOUT-UBX_RXM_RLM_UART1	0x2091025f	U1	-	-	0
CFG-MSGOUT-UBX_RXM_RLM_UART2	0x20910260	U1	-	-	0
CFG-MSGOUT-UBX_RXM_RLM_USB	0x20910261	U1	-	-	0
CFG-MSGOUT-UBX_RXM_RTCM_I2C	0x20910268	U1	-	-	0
CFG-MSGOUT-UBX_RXM_RTCM_SPI	0x2091026c	U1	-	-	0
CFG-MSGOUT-UBX_RXM_RTCM_UART1	0x20910269	U1	-	-	0
CFG-MSGOUT-UBX_RXM_RTCM_UART2	0x2091026a	U1	-	-	0
CFG-MSGOUT-UBX_RXM_RTCM_USB	0x2091026b	U1	-	-	0

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-MSGOUT-UBX_RXM_SFRBX_I2C	0x20910231	U1	-	-	0
CFG-MSGOUT-UBX_RXM_SFRBX_SPI	0x20910235	U1	-	-	0
CFG-MSGOUT-UBX_RXM_SFRBX_UART1	0x20910232	U1	-	-	0
CFG-MSGOUT-UBX_RXM_SFRBX_UART2	0x20910233	U1	-	-	0
CFG-MSGOUT-UBX_RXM_SFRBX_USB	0x20910234	U1	-	-	0
CFG-MSGOUT-UBX_RXM_SPARTN_I2C	0x20910605	U1	-	-	0
CFG-MSGOUT-UBX_RXM_SPARTN_SPI	0x20910609	U1	-	-	0
CFG-MSGOUT-UBX_RXM_SPARTN_UART1	0x20910606	U1	-	-	0
CFG-MSGOUT-UBX_RXM_SPARTN_UART2	0x20910607	U1	-	-	0
CFG-MSGOUT-UBX_RXM_SPARTN_USB	0x20910608	U1	-	-	0
CFG-MSGOUT-UBX_SEC_SIG_I2C	0x20910634	U1	-	-	0
CFG-MSGOUT-UBX_SEC_SIG_SPI	0x20910638	U1	-	-	0
CFG-MSGOUT-UBX_SEC_SIG_UART1	0x20910635	U1	-	-	0
CFG-MSGOUT-UBX_SEC_SIG_UART2	0x20910636	U1	-	-	0
CFG-MSGOUT-UBX_SEC_SIG_USB	0x20910637	U1	-	-	0
CFG-MSGOUT-UBX_TIM_TM2_I2C	0x20910178	U1	-	-	0
CFG-MSGOUT-UBX_TIM_TM2_SPI	0x2091017c	U1	-	-	0
CFG-MSGOUT-UBX_TIM_TM2_UART1	0x20910179	U1	-	-	0
CFG-MSGOUT-UBX_TIM_TM2_UART2	0x2091017a	U1	-	-	0
CFG-MSGOUT-UBX_TIM_TM2_USB	0x2091017b	U1	-	-	0
CFG-MSGOUT-UBX_TIM_TP_I2C	0x2091017d	U1	-	-	0
CFG-MSGOUT-UBX_TIM_TP_SPI	0x20910181	U1	-	-	0
CFG-MSGOUT-UBX_TIM_TP_UART1	0x2091017e	U1	-	-	0
CFG-MSGOUT-UBX_TIM_TP_UART2	0x2091017f	U1	-	-	0
CFG-MSGOUT-UBX_TIM_TP_USB	0x20910180	U1	-	-	0
CFG-MSGOUT-UBX_TIM_VRFY_I2C	0x20910092	U1	-	-	0
CFG-MSGOUT-UBX_TIM_VRFY_SPI	0x20910096	U1	-	-	0
CFG-MSGOUT-UBX_TIM_VRFY_UART1	0x20910093	U1	-	-	0
CFG-MSGOUT-UBX_TIM_VRFY_UART2	0x20910094	U1	-	-	0
CFG-MSGOUT-UBX_TIM_VRFY_USB	0x20910095	U1	-	-	0

Table 76: CFG-MSGOUT configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-NAVHPG-DGNSSMODE	0x20140011	E1	-	-	3 (RTK_FIXED)

Table 77: CFG-NAVHPG configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-NAVSPG-FIXMODE	0x20110011	E1	-	-	3 (AUTO)
CFG-NAVSPG-INIFIX3D	0x10110013	L	-	-	0 (false)
CFG-NAVSPG-WKNRollover	0x30110017	U2	-	-	2172
CFG-NAVSPG-UTCSTANDARD	0x2011001c	E1	-	-	0 (AUTO)
CFG-NAVSPG-DYNMODEL	0x20110021	E1	-	-	4 (AUTOMOT)

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-NAVSPG-ACKAIDING	0x10110025	L	-	-	0 (false)
CFG-NAVSPG-USE_USRDAT	0x10110061	L	-	-	0 (false)
CFG-NAVSPG-USRDAT_MAJA	0x50110062	R8	-	m	6378137
CFG-NAVSPG-USRDAT_FLAT	0x50110063	R8	-	-	298.25722356300002502
CFG-NAVSPG-USRDAT_DX	0x40110064	R4	-	m	0
CFG-NAVSPG-USRDAT_DY	0x40110065	R4	-	m	0
CFG-NAVSPG-USRDAT_DZ	0x40110066	R4	-	m	0
CFG-NAVSPG-USRDAT_ROT_X	0x40110067	R4	-	arcsec	0
CFG-NAVSPG-USRDAT_ROT_Y	0x40110068	R4	-	arcsec	0
CFG-NAVSPG-USRDAT_ROT_Z	0x40110069	R4	-	arcsec	0
CFG-NAVSPG-USRDAT_SCALE	0x4011006a	R4	-	ppm	0
CFG-NAVSPG-INFIL_MINSVS	0x201100a1	U1	-	-	5
CFG-NAVSPG-INFIL_MAXSVS	0x201100a2	U1	-	-	32
CFG-NAVSPG-INFIL_MINCNO	0x201100a3	U1	-	dBHz	20
CFG-NAVSPG-INFIL_MINELEV	0x201100a4	I1	-	deg	10
CFG-NAVSPG-INFIL_NCNTHR_S	0x201100aa	U1	-	-	0
CFG-NAVSPG-INFIL_CNTHR_S	0x201100ab	U1	-	-	0
CFG-NAVSPG-OUTFIL_PDOP	0x301100b1	U2	0.1	-	250
CFG-NAVSPG-OUTFIL_TDOP	0x301100b2	U2	0.1	-	250
CFG-NAVSPG-OUTFIL_PACC	0x301100b3	U2	-	m	100
CFG-NAVSPG-OUTFIL_TACC	0x301100b4	U2	-	m	350
CFG-NAVSPG-OUTFIL_FACC	0x301100b5	U2	0.01	m/s	150
CFG-NAVSPG-CONSTR_ALT	0x401100c1	I4	0.01	m	0
CFG-NAVSPG-CONSTR_ALTVAR	0x401100c2	U4	0.0001	m ²	10000
CFG-NAVSPG-CONSTR_DGNSSTO	0x201100c4	U1	-	s	60
CFG-NAVSPG-SIGATTCOMP	0x201100d6	E1	-	-	0 (DIS)

Table 78: CFG-NAVSPG configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-NMEA-PROTVR	0x20930001	E1	-	-	42 (V411)
CFG-NMEA-MAXSVS	0x20930002	E1	-	-	0 (UNLIM)
CFG-NMEA-COMPAT	0x10930003	L	-	-	0 (false)
CFG-NMEA-CONSIDER	0x10930004	L	-	-	1 (true)
CFG-NMEA-LIMIT82	0x10930005	L	-	-	0 (false)
CFG-NMEA-HIGHPREC	0x10930006	L	-	-	0 (false)
CFG-NMEA-SVNUMBERING	0x20930007	E1	-	-	0 (STRICT)
CFG-NMEA-FILT_GPS	0x10930011	L	-	-	0 (false)
CFG-NMEA-FILT_SBAS	0x10930012	L	-	-	0 (false)
CFG-NMEA-FILT_GAL	0x10930013	L	-	-	0 (false)
CFG-NMEA-FILT_QZSS	0x10930015	L	-	-	0 (false)
CFG-NMEA-FILT_GLO	0x10930016	L	-	-	0 (false)

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-NMEA-FILT_BDS	0x10930017	L	-	-	0 (false)
CFG-NMEA-OUT_INVFIX	0x10930021	L	-	-	0 (false)
CFG-NMEA-OUT_MSKFIX	0x10930022	L	-	-	0 (false)
CFG-NMEA-OUT_INVTIME	0x10930023	L	-	-	0 (false)
CFG-NMEA-OUT_INVDATE	0x10930024	L	-	-	0 (false)
CFG-NMEA-OUT_ONLYGPS	0x10930025	L	-	-	0 (false)
CFG-NMEA-OUT_FROZENCOG	0x10930026	L	-	-	0 (false)
CFG-NMEA-MAINTALKERID	0x20930031	E1	-	-	0 (AUTO)
CFG-NMEA-GSVTALKERID	0x20930032	E1	-	-	0 (GNSS)
CFG-NMEA-BDSTALKERID	0x30930033	U2	-	-	0

Table 79: CFG-NMEA configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-RATE-MEAS	0x30210001	U2	0.001	s	1000
CFG-RATE-NAV	0x30210002	U2	-	-	1
CFG-RATE-TIMEREF	0x20210003	E1	-	-	1 (GPS)
CFG-RATE-NAV_PRIO	0x20210004	U1	-	Hz	0

Table 80: CFG-RATE configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-RINV-DUMP	0x10c70001	L	-	-	0 (false)
CFG-RINV-BINARY	0x10c70002	L	-	-	0 (false)
CFG-RINV-DATA_SIZE	0x20c70003	U1	-	-	22
CFG-RINV-CHUNK0	0x50c70004	X8	-	-	0x203a656369746f4e ("Notice: ")
CFG-RINV-CHUNK1	0x50c70005	X8	-	-	0x2061746164206f6e ("no data ")
CFG-RINV-CHUNK2	0x50c70006	X8	-	-	0x0000216465766173 ("saved!\0\0")
CFG-RINV-CHUNK3	0x50c70007	X8	-	-	0x0000000000000000

Table 81: CFG-RINV configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-RTCM-DF003_IN	0x30090008	U2	-	-	0
CFG-RTCM-DF003_IN_FILTER	0x20090009	E1	-	-	0 (DISABLED)

Table 82: CFG-RTCM configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-SBAS-USE_TESTMODE	0x10360002	L	-	-	0 (false)
CFG-SBAS-USE_RANGING	0x10360003	L	-	-	1 (true)
CFG-SBAS-USE_DIFFCORR	0x10360004	L	-	-	1 (true)
CFG-SBAS-USE_INTEGRITY	0x10360005	L	-	-	0 (false)

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-SBAS-PRNSCANMASK	0x50360006	X8	-	-	0x0000000000072bc8 (ALL PRN123 PRN126 PRN127 PRN128 PRN129 PRN131 PRN133 PRN136 PRN137 PRN138)

Table 83: CFG-SBAS configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-SEC-CFG_LOCK	0x10f60009	L	-	-	0 (false)
CFG-SEC-CFG_LOCK_UNLOCKGRP1	0x30f6000a	U2	-	-	0
CFG-SEC-CFG_LOCK_UNLOCKGRP2	0x30f6000b	U2	-	-	0

Table 84: CFG-SEC configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-SFCORE-USE_SF	0x10080001	L	-	-	1 (true)

Table 85: CFG-SFCORE configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-SFIMU-GYRO_TC_UPDATE_PERIOD	0x30060007	U2	-	s	1200
CFG-SFIMU-GYRO_RMSTHDL	0x20060008	U1	2 ⁻⁸	deg/s	128
CFG-SFIMU-GYRO_FREQUENCY	0x20060009	U1	-	Hz	0
CFG-SFIMU-GYRO_LATENCY	0x3006000a	U2	-	ms	0
CFG-SFIMU-GYRO_ACCURACY	0x3006000b	U2	1e-3	deg/s	0
CFG-SFIMU-ACCEL_RMSTHDL	0x20060015	U1	2 ⁻⁶	m/s ²	32
CFG-SFIMU-ACCEL_FREQUENCY	0x20060016	U1	-	Hz	0
CFG-SFIMU-ACCEL_LATENCY	0x30060017	U2	-	ms	0
CFG-SFIMU-ACCEL_ACCURACY	0x30060018	U2	1e-4	m/s ²	0
CFG-SFIMU-IMU_EN	0x1006001d	L	-	-	1 (true)
CFG-SFIMU-IMU_I2C_SCL_PIO	0x2006001e	U1	-	-	4
CFG-SFIMU-IMU_I2C_SDA_PIO	0x2006001f	U1	-	-	3
CFG-SFIMU-AUTO_MNTALG_ENA	0x10060027	L	-	-	0 (false)
CFG-SFIMU-IMU_MNTALG_YAW	0x4006002d	U4	1e-2	deg	0
CFG-SFIMU-IMU_MNTALG_PITCH	0x3006002e	I2	1e-2	deg	0
CFG-SFIMU-IMU_MNTALG_ROLL	0x3006002f	I2	1e-2	deg	0

Table 86: CFG-SFIMU configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-SFODO-COMBINE_TICKS	0x10070001	L	-	-	0 (false)
CFG-SFODO-USE_SPEED	0x10070003	L	-	-	0 (false)
CFG-SFODO-DIS_AUTOCOUNTMAX	0x10070004	L	-	-	0 (false)
CFG-SFODO-DIS_AUTODIRPINPOL	0x10070005	L	-	-	0 (false)
CFG-SFODO-DIS_AUTOSPEED	0x10070006	L	-	-	0 (false)
CFG-SFODO-FACTOR	0x40070007	U4	1e-6	-	0
CFG-SFODO-QUANT_ERROR	0x40070008	U4	1e-6	m (or m/s)	0
CFG-SFODO-COUNT_MAX	0x40070009	U4	-	-	1

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-SFODO-LATENCY	0x3007000a	U2	-	ms	0
CFG-SFODO-FREQUENCY	0x2007000b	U1	-	Hz	0
CFG-SFODO-CNT_BOTH_EDGES	0x1007000d	L	-	-	0 (false)
CFG-SFODO-SPEED_BAND	0x3007000e	U2	-	cm/s	0
CFG-SFODO-USE_WT_PIN	0x1007000f	L	-	-	1 (true)
CFG-SFODO-DIR_PINPOL	0x10070010	L	-	-	0 (false)
CFG-SFODO-DIS_AUTOSW	0x10070011	L	-	-	0 (false)

Table 87: CFG-SFODO configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-SIGNAL-GPS_ENA	0x1031001f	L	-	-	1 (true)
CFG-SIGNAL-GPS_L1CA_ENA	0x10310001	L	-	-	1 (true)
CFG-SIGNAL-GPS_L2C_ENA	0x10310003	L	-	-	1 (true)
CFG-SIGNAL-SBAS_ENA	0x10310020	L	-	-	1 (true)
CFG-SIGNAL-SBAS_L1CA_ENA	0x10310005	L	-	-	1 (true)
CFG-SIGNAL-GAL_ENA	0x10310021	L	-	-	1 (true)
CFG-SIGNAL-GAL_E1_ENA	0x10310007	L	-	-	1 (true)
CFG-SIGNAL-GAL_E5B_ENA	0x1031000a	L	-	-	1 (true)
CFG-SIGNAL-BDS_ENA	0x10310022	L	-	-	1 (true)
CFG-SIGNAL-BDS_B1_ENA	0x1031000d	L	-	-	1 (true)
CFG-SIGNAL-BDS_B2_ENA	0x1031000e	L	-	-	1 (true)
CFG-SIGNAL-QZSS_ENA	0x10310024	L	-	-	1 (true)
CFG-SIGNAL-QZSS_L1CA_ENA	0x10310012	L	-	-	1 (true)
CFG-SIGNAL-QZSS_L2C_ENA	0x10310015	L	-	-	1 (true)
CFG-SIGNAL-GLO_ENA	0x10310025	L	-	-	1 (true)
CFG-SIGNAL-GLO_L1_ENA	0x10310018	L	-	-	1 (true)
CFG-SIGNAL-GLO_L2_ENA	0x1031001a	L	-	-	1 (true)

Table 88: CFG-SIGNAL configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-SPI-MAXFF	0x20640001	U1	-	-	50
CFG-SPI-CPOLARITY	0x10640002	L	-	-	0 (false)
CFG-SPI-CPHASE	0x10640003	L	-	-	0 (false)
CFG-SPI-EXTENDEDTIMEOUT	0x10640005	L	-	-	0 (false)
CFG-SPI-ENABLED	0x10640006	L	-	-	0 (false)

Table 89: CFG-SPI configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-SPIINPROT-UBX	0x10790001	L	-	-	1 (true)
CFG-SPIINPROT-NMEA	0x10790002	L	-	-	1 (true)
CFG-SPIINPROT-RTCM3X	0x10790004	L	-	-	1 (true)
CFG-SPIINPROT-SPARTN	0x10790005	L	-	-	1 (true)

Table 90: CFG-SPIINPROT configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-SPIOUTPROT-UBX	0x107a0001	L	-	-	1 (true)
CFG-SPIOUTPROT-NMEA	0x107a0002	L	-	-	1 (true)

Table 91: CFG-SPIOUTPROT configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-TP-PULSE_DEF	0x20050023	E1	-	-	0 (PERIOD)
CFG-TP-PULSE_LENGTH_DEF	0x20050030	E1	-	-	1 (LENGTH)
CFG-TP-ANT_CABLEDELAY	0x30050001	I2	1e-9	s	50
CFG-TP-PERIOD_TP1	0x40050002	U4	1e-6	s	1000000
CFG-TP-PERIOD_LOCK_TP1	0x40050003	U4	1e-6	s	1000000
CFG-TP-FREQ_TP1	0x40050024	U4	-	Hz	1
CFG-TP-FREQ_LOCK_TP1	0x40050025	U4	-	Hz	1
CFG-TP-LEN_TP1	0x40050004	U4	1e-6	s	0
CFG-TP-LEN_LOCK_TP1	0x40050005	U4	1e-6	s	100000
CFG-TP-DUTY_TP1	0x5005002a	R8	-	%	0
CFG-TP-DUTY_LOCK_TP1	0x5005002b	R8	-	%	10
CFG-TP-USER_DELAY_TP1	0x40050006	I4	1e-9	s	0
CFG-TP-TP1_ENA	0x10050007	L	-	-	1 (true)
CFG-TP-SYNC_GNSS_TP1	0x10050008	L	-	-	1 (true)
CFG-TP-USE_LOCKED_TP1	0x10050009	L	-	-	1 (true)
CFG-TP-ALIGN_TO_TOW_TP1	0x1005000a	L	-	-	1 (true)
CFG-TP-POL_TP1	0x1005000b	L	-	-	1 (true)
CFG-TP-TIMEGRID_TP1	0x2005000c	E1	-	-	0 (UTC)
CFG-TP-DRSTR_TP1	0x20050035	E1	-	-	1 (DRIVE_STRENGTH_4MA)

Table 92: CFG-TP configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-TXREADY-ENABLED	0x10a20001	L	-	-	0 (false)
CFG-TXREADY-POLARITY	0x10a20002	L	-	-	0 (false)
CFG-TXREADY-PIN	0x20a20003	U1	-	-	0
CFG-TXREADY-THRESHOLD	0x30a20004	U2	-	-	0
CFG-TXREADY-INTERFACE	0x20a20005	E1	-	-	0 (I2C)

Table 93: CFG-TXREADY configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-UART1-BAUDRATE	0x40520001	U4	-	-	38400
CFG-UART1-STOPBITS	0x20520002	E1	-	-	1 (ONE)
CFG-UART1-DATABITS	0x20520003	E1	-	-	0 (EIGHT)
CFG-UART1-PARITY	0x20520004	E1	-	-	0 (NONE)
CFG-UART1-ENABLED	0x10520005	L	-	-	1 (true)

Table 94: CFG-UART1 configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-UART1INPROT-UBX	0x10730001	L	-	-	1 (true)

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-UART1INPROT-NMEA	0x10730002	L	-	-	1 (true)
CFG-UART1INPROT-RTCM3X	0x10730004	L	-	-	1 (true)
CFG-UART1INPROT-SPARTN	0x10730005	L	-	-	1 (true)

Table 95: CFG-UART1INPROT configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-UART1OUTPROT-UBX	0x10740001	L	-	-	1 (true)
CFG-UART1OUTPROT-NMEA	0x10740002	L	-	-	1 (true)

Table 96: CFG-UART1OUTPROT configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-UART2-BAUDRATE	0x40530001	U4	-	-	38400
CFG-UART2-STOPBITS	0x20530002	E1	-	-	1 (ONE)
CFG-UART2-DATABITS	0x20530003	E1	-	-	0 (EIGHT)
CFG-UART2-PARITY	0x20530004	E1	-	-	0 (NONE)
CFG-UART2-ENABLED	0x10530005	L	-	-	1 (true)

Table 97: CFG-UART2 configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-UART2INPROT-UBX	0x10750001	L	-	-	0 (false)
CFG-UART2INPROT-NMEA	0x10750002	L	-	-	0 (false)
CFG-UART2INPROT-RTCM3X	0x10750004	L	-	-	1 (true)
CFG-UART2INPROT-SPARTN	0x10750005	L	-	-	1 (true)

Table 98: CFG-UART2INPROT configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-UART2OUTPROT-UBX	0x10760001	L	-	-	0 (false)
CFG-UART2OUTPROT-NMEA	0x10760002	L	-	-	0 (false)

Table 99: CFG-UART2OUTPROT configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-USB-ENABLED	0x10650001	L	-	-	1 (true)
CFG-USB-SELFPOW	0x10650002	L	-	-	1 (true)
CFG-USB-VENDOR_ID	0x3065000a	U2	-	-	5446
CFG-USB-PRODUCT_ID	0x3065000b	U2	-	-	425
CFG-USB-POWER	0x3065000c	U2	-	mA	0
CFG-USB-VENDOR_STR0	0x5065000d	X8	-	-	0x4120786f6c622d75 ("u-blox A")
CFG-USB-VENDOR_STR1	0x5065000e	X8	-	-	0x2e777777202d2047 ("G - www.")
CFG-USB-VENDOR_STR2	0x5065000f	X8	-	-	0x632e786f6c622d75 ("u-blox.c")
CFG-USB-VENDOR_STR3	0x50650010	X8	-	-	0x0000000000006d6f ("om\0\0\0\0")
CFG-USB-PRODUCT_STR0	0x50650011	X8	-	-	0x4720786f6c622d75 ("u-blox G")

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-USB-PRODUCT_STR1	0x50650012	X8	-	-	0x656365722053534e ("NSS rece")
CFG-USB-PRODUCT_STR2	0x50650013	X8	-	-	0x0000000072657669 ("iver\0\0\0\0")
CFG-USB-PRODUCT_STR3	0x50650014	X8	-	-	0x0000000000000000
CFG-USB-SERIAL_NO_STR0	0x50650015	X8	-	-	0x0000000000000000
CFG-USB-SERIAL_NO_STR1	0x50650016	X8	-	-	0x0000000000000000
CFG-USB-SERIAL_NO_STR2	0x50650017	X8	-	-	0x0000000000000000
CFG-USB-SERIAL_NO_STR3	0x50650018	X8	-	-	0x0000000000000000

Table 100: CFG-USB configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-USBINPROT-UBX	0x10770001	L	-	-	1 (true)
CFG-USBINPROT-NMEA	0x10770002	L	-	-	1 (true)
CFG-USBINPROT-RTCM3X	0x10770004	L	-	-	1 (true)
CFG-USBINPROT-SPARTN	0x10770005	L	-	-	1 (true)

Table 101: CFG-USBINPROT configuration defaults

Configuration item	Key ID	Type	Scale	Unit	Default value
CFG-USBOUTPROT-UBX	0x10780001	L	-	-	1 (true)
CFG-USBOUTPROT-NMEA	0x10780002	L	-	-	1 (true)

Table 102: CFG-USBOUTPROT configuration defaults

Related documents

- [1] ZED-F9R-02B Data sheet, UBX-21017486
- [2] ZED-F9R integration manual, UBX-20039643
- [3] RTCM Standard 10403.3 Recommended Standards for Differential GNSS (Global Navigation Satellite Systems) Service, Version 3
- [4] Radio Resource LCS Protocol (RRLP), (3GPP TS 44.031 version 11.0.0 Release 11)
- [5] NMEA 0183 Standard for Interfacing Marine Electronic Devices, Version 4.11, November 2018



For regular updates to u-blox documentation and to receive product change notifications please register on our homepage (<https://www.u-blox.com>).

Revision history

Revision	Date	Name	Status / Comments
R01	14-Sep-2021	ssid	- Advance information for ZED-F9R-02B
R02	02-Nov-2021	ssid	- Minor update regarding the dynamic model configuration

Contact

For complete contact information visit us at www.u-blox.com.

u-blox Offices

North, Central and South America

u-blox America, Inc.

Phone: +1 703 483 3180
E-mail: info_us@u-blox.com

Regional Office West Coast

Phone: +1 408 573 3640
E-mail: info_us@u-blox.com

Technical Support

Phone: +1 703 483 3185
E-mail: support_us@u-blox.com

Headquarters

Europe, Middle East, Africa

u-blox AG

Phone: +41 44 722 74 44
E-mail: info@u-blox.com
Support: support@u-blox.com

Asia, Australia, Pacific

u-blox Singapore Pte. Ltd.

Phone: +65 6734 3811
E-mail: info_ap@u-blox.com
Support: support_ap@u-blox.com

Regional Office Australia

Phone: +61 3 9566 7255
E-mail: info_anz@u-blox.com
Support: support_ap@u-blox.com

Regional Office China (Beijing)

Phone: +86 10 68 133 545
E-mail: info_cn@u-blox.com
Support: support_cn@u-blox.com

Regional Office China (Chongqing)

Phone: +86 23 6815 1588
E-mail: info_cn@u-blox.com
Support: support_cn@u-blox.com

Regional Office China (Shanghai)

Phone: +86 21 6090 4832
E-mail: info_cn@u-blox.com
Support: support_cn@u-blox.com

Regional Office China (Shenzhen)

Phone: +86 755 8627 1083
E-mail: info_cn@u-blox.com
Support: support_cn@u-blox.com

Regional Office India

Phone: +91 80 4050 9200
E-mail: info_in@u-blox.com
Support: support_in@u-blox.com

Regional Office Japan (Osaka)

Phone: +81 6 6941 3660
E-mail: info_jp@u-blox.com
Support: support_jp@u-blox.com

Regional Office Japan (Tokyo)

Phone: +81 3 5775 3850
E-mail: info_jp@u-blox.com
Support: support_jp@u-blox.com

Regional Office Korea

Phone: +82 2 542 0861
E-mail: info_kr@u-blox.com
Support: support_kr@u-blox.com

Regional Office Taiwan

Phone: +886 2 2657 1090
E-mail: info_tw@u-blox.com
Support: support_tw@u-blox.com