




Product summary

u-connectXpress

Wireless connectivity software for u-blox short range radio modules

Benefits

- Accelerated time-to-market for Bluetooth and Wi-Fi connectivity
- Secure IoT delivered out-of-the box
- Pre-flashed at delivery for efficient production
- Portability and re-use of applications is enabled across products and technologies
- Easy-to-use command API with zero programming

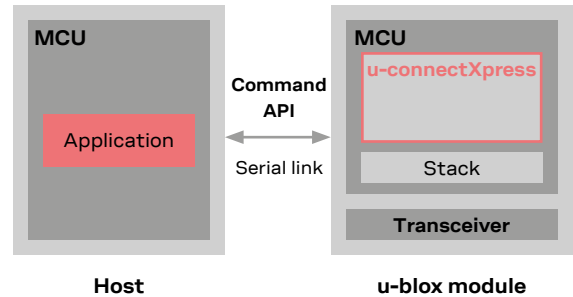

Go wireless in no time

u-connectXpress software for u-blox short range stand-alone modules makes it easy to integrate Bluetooth and Wi-Fi connectivity into new and existing products. u-connectXpress accelerates the time-to-market by providing ready-to-use software to manage connectivity behind the scenes, reducing complexity of development.

u-connectXpress is pre-flashed and caters to a broad range of IoT markets, such as smart buildings, smart cities, smart industry, and healthcare, with applications including smart lighting systems, industrial sensor networks, asset tracking solutions, and building automation systems.

With u-connectXpress, a multitude of use cases can readily be realized: everything from cable replacement, configuration and control of equipment using smartphone/tablet to advanced Wi-Fi connectivity and sensor/gateway applications.

Products that support u-connectXpress

ANNA-B112, NINA-B1, NINA-B2, NINA-B31, NINA-W13, NINA-W15, ODIN-W2; see table on page 2.

u-connectXpress integrates connectivity through an extensive command API using industry-standard AT commands together with u-blox additions that are common across u-blox products, thus enabling portability.

By means of their application on the host, integrators can configure the desired connectivity without needing to write complex code, and thus focus on time-to-market and the core application, and not the connectivity details.

To facilitate efficient handling and management of data on both wireless and physical interfaces, u-connectXpress embeds the concept of u-connect streams.



u-connectXpress streams enabling IoT

u-connectXpress is based on the unique u-connect streams concept by u-blox. This enables efficient management of data flows from wireless and physical interfaces, providing flexibility and excellent performance. A URL scheme based on internet standards is used to define data streams, which can be of any type, from a physical interface such as TCP, Bluetooth serial port service, or an MQTT connection. Each stream has an input and output of data and can be connected to form use cases that support different applications.

Secure IoT

Security is fundamental for IoT systems. Secure boot ensures that the module only boots up with original certified u-connectXpress software, thus preventing malicious attacks. Additionally, u-connectXpress supports a high level of link and data security with support for Wi-Fi enterprise security (EAP-TLS), IP end-to-end security (TLS), HTTP(S), and LE secure connections for Bluetooth.

Secure boot with u-connectXpress

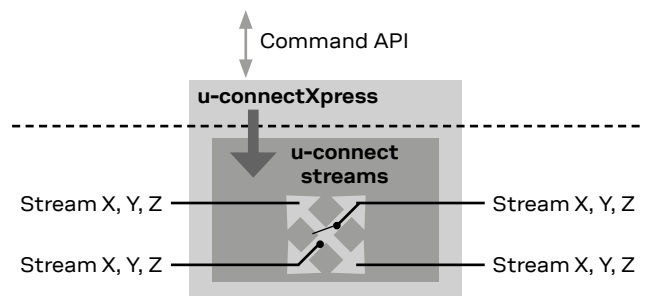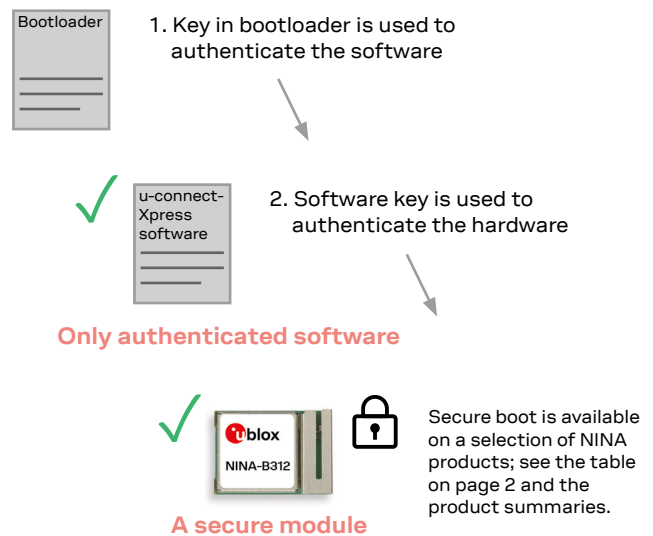



u-connectXpress – overview of products and features						
	ANNA-B1 NINA-B1	NINA-B2	NINA-B31	NINA-W13	NINA-W15	ODIN-W2
Bluetooth Technology						
Bluetooth qualification [version]	5.0	4.2	5.0		4.2	4.0
Bluetooth profiles *	G	S, G	G		S, G	S, D, P, G
Bluetooth BR/EDR		•			•	•
Advertisement extensions (BT 5.0)	•		•			
2 Mbps phy (BT 5.0)	•		•			
Long range, coded phy (BT 5.0)			•			
Number of parallel links	7 central 1 peripheral	7 central 1 peripheral	7 central 1 peripheral		7 central 1 peripheral	7 central 1 peripheral
Simultaneous Central & Peripheral	•	•	•		•	
Multiple central	•		•			
Beacon	•	•	•			•
Serial port service (SPS)	•	•	•		•	•
Simultaneous GATT, serial port service	•	•	•		•	•
Wi-Fi Technology						
Wi-Fi IEEE 802.11 standards				b/g/n	b/g/n	a/b/g/n
MIMO						•
Micro access point				•	•	•
Simultaneous client & access point				•	•	
Simultaneous Wi-Fi & Bluetooth					•	•
Max connections				10	10	10
Roaming 802.11r						•
Network and IoT						
HTTP(S)				•	•	
MQTT/MQTT-SN				•	•	•
TCP				•	•	•
UDP				•	•	•
Simple network time protocol (SNTP)				•	•	
Point-to-point protocol (PPP)				•	•	•
Bridge interface				•	•	•
DHCP Client & Server				•	•	•
DNS Client				•	•	•
Address conflict detection				•	•	•
IP forwarding				•	•	•
Combined IPv4				•	•	•
TCP keep-alive				•	•	•
Ping command				•	•	•
Security						
Secure Boot		•	•	•	•	
Wi-Fi security				WPA/WPA2	WPA/WPA2	WEP 64/128, WPA/WPA2
Wi-Fi Enterprise security				PEAP, EAP-TLS	PEAP, EAP-TLS	LEAP, PEAP, EAP-TLS
Wi-Fi security - protected mgt frames						•
LE secure connection	•		•	•	•	
Bluetooth privacy						•
SSL/TLS certificate & private key mgr				•	•	•
TLS (Transport layer security)				•	•	•
u-connect streams						
Supported streams	SPS, UART	SPS, SPP, UART	SPS, UART	TCP, UDP, MQTT, TLS, UART	TCP, UDP, SPS, SPP, MQTT, TLS, UART	TCP, UDP, SPS, SPP, MQTT, TLS, UART
System and interfaces						
Configuration over the air (COA)	•	•	•	•	•	•
Multi-drop / Extended data mode	•	•	•	•	•	•
NFC Tag	•		•			
GPIO	•	•	•	•	•	•
SPI		•		•	•	
RMI (Ethernet)				•	•	•
UART	•	•	•	•	•	•

Further information

For contact information, see www.u-blox.com/contact-us.

For more details, see the product summaries of the products that support u-connectXpress.

Legal Notice:

u-blox reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. Reproduction, use, modification or disclosure to third parties of this document or any part thereof without the express permission of u-blox is strictly prohibited.

The information contained herein is provided “as is”. No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document. This document may be revised by u-blox at any time. For most recent documents, please visit www.u-blox.com.
Copyright © 2020, u-blox AG